



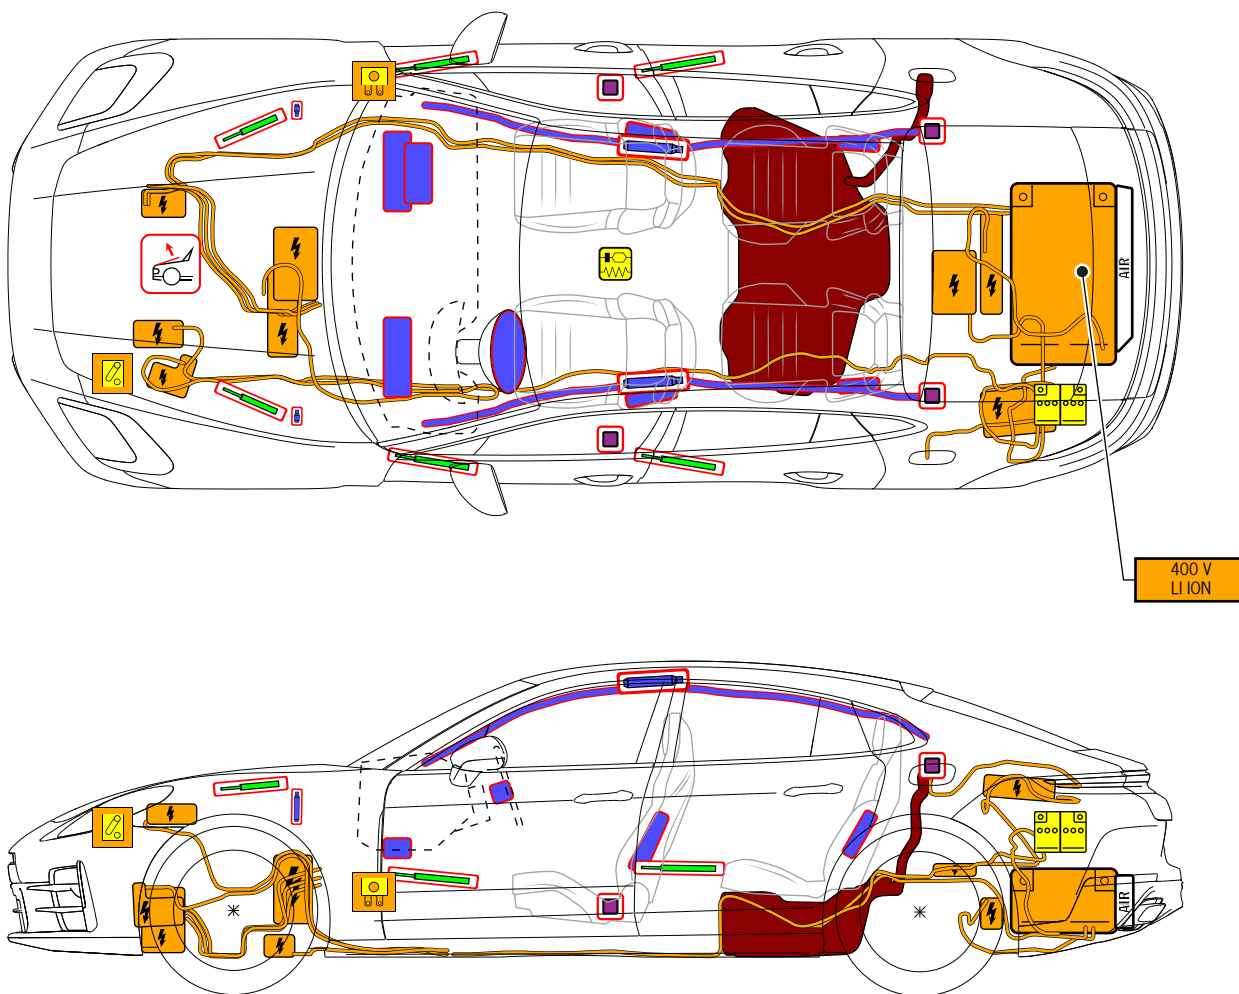

PORSCHE

Porsche AG, Panamera E-Hybrid (G3) All derivatives Sedan, as from model year 2024



Note: The maximum possible equipment is shown.

	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		Pedestrian protection active system
			Gas strut / Preloaded spring		High strength zone				
	Battery low voltage				Fuel tank				
	High-voltage battery		High-voltage power cable		Low voltage device that disconnects high voltage		Fuse box disabling high voltage		
	Air tank		Fuel tank content gasoline/ethanol		High voltage component				



PORSCHE

Porsche AG, Panamera E-Hybrid (G3)


All derivatives

Sedan, as from model year 2024

1. Identification / recognition



The lack of engine noise does not mean that the vehicle is turned off.
Restart is possible until the vehicle is decommissioned.

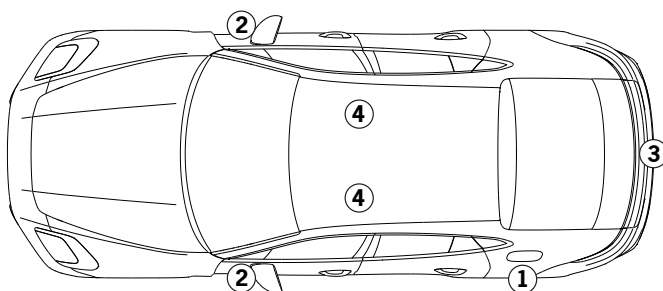

Equipment-dependent



Equipment-dependent



Equipment-dependent




Equipment-dependent


2. Immobilization / stabilisation / lifting

Immobilising the vehicle

Actuate electric parking brake

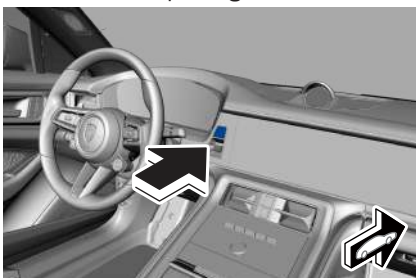

Lifting points

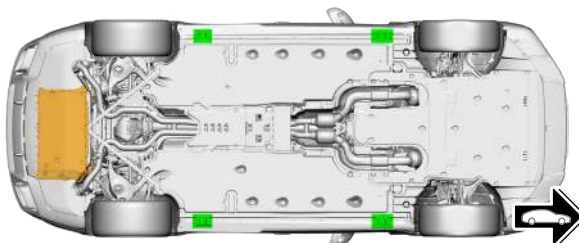


Suitable lifting points

High-voltage battery

Switching off ignition

Press "Start-Stop" button on the instrument panel





3. Disable direct hazards / safety regulations

The high-voltage system is automatically disabled in the event of accidents in which the airbag is triggered. The high-voltage system is de-energised approx. 20 seconds after the disabling.

Disabling high-voltage system



Option 1: from the engine compartment

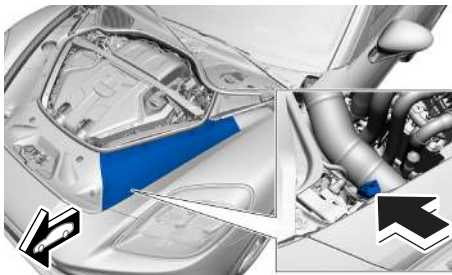





PORSCHE

Porsche AG, Panamera E-Hybrid (G3) All derivatives Sedan, as from model year 2024



Option 2: from the vehicle rear



Do not touch, cut or open high-voltage components and high-voltage battery!
Wear appropriate protective equipment!

Disconnecting 12-volt battery




from the engine compartment




Disconnect the negative terminal of the battery



Disconnecting from charging station (emergency release)

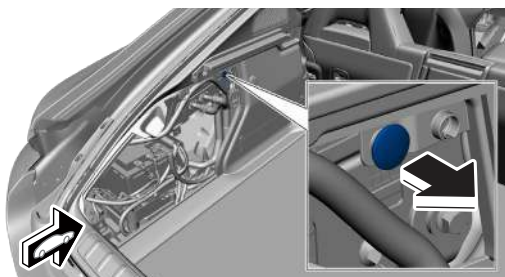

4. Access to the occupants

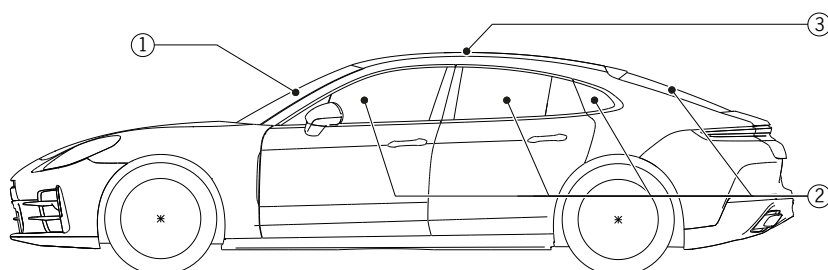


Glass types

- ① Laminated safety glass
- ② Equipment-dependent: Single-pane safety glass or laminated safety glass
- ③ Equipment-dependent: Single-pane safety glass

5. Stored energy / liquids / gases / solids



Gasoline
max. 80 l



LI ION
400 V




PORSCHE

Porsche AG, Panamera E-Hybrid (G3)

All derivatives

Sedan, as from model year 2024



12 V



If coolant is leaking from the battery cooling system, there is the risk of a thermal reaction in the high-voltage battery.
Monitor high-voltage battery temperature.



6. In case of fire



Lithium-ion batteries may self-ignite or re-ignite after the fire has been extinguished!
Wear appropriate protective equipment!



7. In case of submersion

After recovering the vehicle from the water, disable the high-voltage system (see section 3) and allow the water to drain. Wear appropriate protective equipment!

8. Towing / transportation / storage



Do not tow a vehicle involved in an accident on its drive axles.



9. Important additional information

You can find further information on assistance in the event of an accident and recovery of vehicles at:

<https://www.vda.de/de/themen/automobilindustrie/standards-und-normung/retten-und-bergen>

10. Explanation of pictograms used



Hybrid Electric
Vehicle on fuel of
liquid group 2



General warning
sign



Warning,
Electricity



Flammable



Explosive



Corrosives



Hazardous to the
human health




Environmental
hazard



Bonnet



Boot



Remove
smart key



Use thermal
Infrared camera



Dangerous
voltage



Use water to
extinguish the fire