



 High voltage traction batteries (Lithium Ion)	 Air Conditioning	 High voltage component	 Low voltage battery	 High voltage power cables
 Air tank	 Refrigerant lines	 Lifting point	 Emergency switch	 Emergency window
 High voltage disconnect	 Low voltage disconnect	 High voltage disconnect with low voltage device	 Steering wheel tilt control	 Seat adjustment forward and back
 Seat height adjustment	 Suspension height control	 High voltage batteries vehicle with electrical traction	 Left hand drive	 Drive direction



1. Identification / recognition	
	High voltage batteries vehicle with electrical traction
2. Immobilization / stabilization / lifting	
	Lifting point
	Suspension height control
3. Disable direct hazards / safety regulations	
	Low voltage disconnect
	High voltage disconnect with low voltage device
	High voltage disconnect with high voltage device Appropriate PPE is needed for the action
4. Access to the occupants	
	Emergency switch doors
	Emergency window Left hand side : 4 Right hand side: 4
	Steering wheel tilt control in drivers cabin (pneumatic)
	Seat adjustment forward and back
	Seat height in drivers cabin (pneumatic)

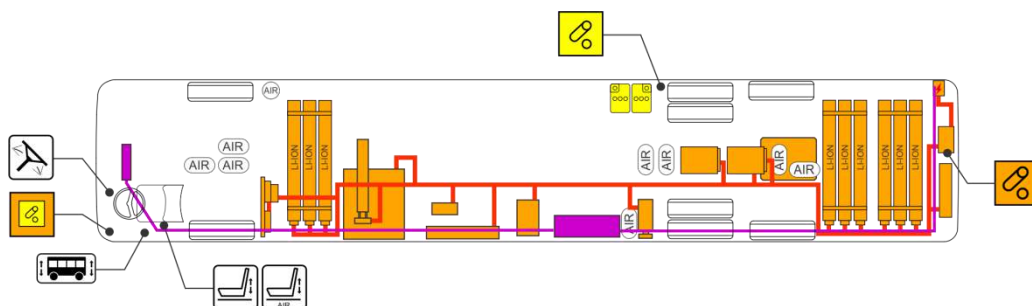

5. Stored energy / liquids / gases / solids

 High voltage traction batteries (Lithium Ion)		
		
 Air Conditioning		
		
 Low voltage battery		
 Air tank		

6. In case of fire

LI ION High voltage traction batteries (Lithium Ion)				
				
	Never open the traction batteries for any reason or emergency, as it can lead to injury.			



7. In case of submersion



Once the vehicle is out of the water: take the same safety instructions as mentioned in the documentation of the manufacturer, if you suspect damage or leakage of a traction battery.

8. Towing / transportation / storage



Warning! Electricity.



Towing speed should never exceed 37 mph (60 km/h).

Drive axle half shafts (axle 2)

Before towing, the two axle shafts must be removed from the drive axle.

The hub openings have to be closed by means of a cover (special tool).

Towing fork

Behind the front-bumper of the vehicle, a threaded bush has been fitted to accept the towing fork supplied with the on-board toolkit.

Never lift the vehicle at the towing fork.

9. Important additional information

Because of the presence of high voltage, danger of electrocution should always be reckoned with, as high-voltage components or high-voltage cables can be damaged after an incident. Always de-energize the high-voltage circuit first! Always take into account the necessary personal protective equipment (PPE). Do not touch electrical components before the high-voltage circuits have been de-energized!



10. Explanation of pictograms used

	Warning! Electricity
	Warning! Low temperatures
	Be careful!
	Flammable
	Acute toxicity
	Corrosives
	Gases under pressure
	Harmful
	Do not break open
	Do not extinguish with water
	Hazardous to the human health
	Environmental hazard

This chapter will be continued on the next page.



Continued from previous page

10. Explanation of pictograms used

	Use powder " D " to extinguish " <i>metal</i> " fire
	Use powder " ABC " to extinguish " <i>solids, gases, liquids</i> " fire
	Use protective clothing (PPE)