




LI ION High voltage traction batteries (Lithium Ion)	Air Conditioning	High voltage component	Low voltage battery	High voltage power cable zone
AIR Air tank	Refrigerant lines	Lifting point	Emergency switch	Emergency window
High voltage disconnect	Low voltage disconnect	High voltage disconnect with low voltage device	Steering wheel tilt control	Seat adjustment longitudinal
Seat height adjustment	Suspension height control		Left hand drive	High voltage batteries vehicle with electrical traction



1. Identification / recognition	
	High voltage batteries vehicle with electrical traction
2. Immobilization / stabilization / lifting	
	Lifting point
	Suspension height control
3. Disable direct hazards / safety regulations	
	Low voltage disconnect
	High voltage disconnect with low voltage device
	High voltage disconnect with high voltage device Appropriate PPE is needed for the action
4. Access to the occupants	
	Emergency switch
	Emergency window Left hand side : 6 Right hand side: 6
	Steering wheel tilt control in drivers cabin (pneumatic)
	Seat adjustment longitudinal (pneumatic)
	Seat height adjustment (pneumatic)

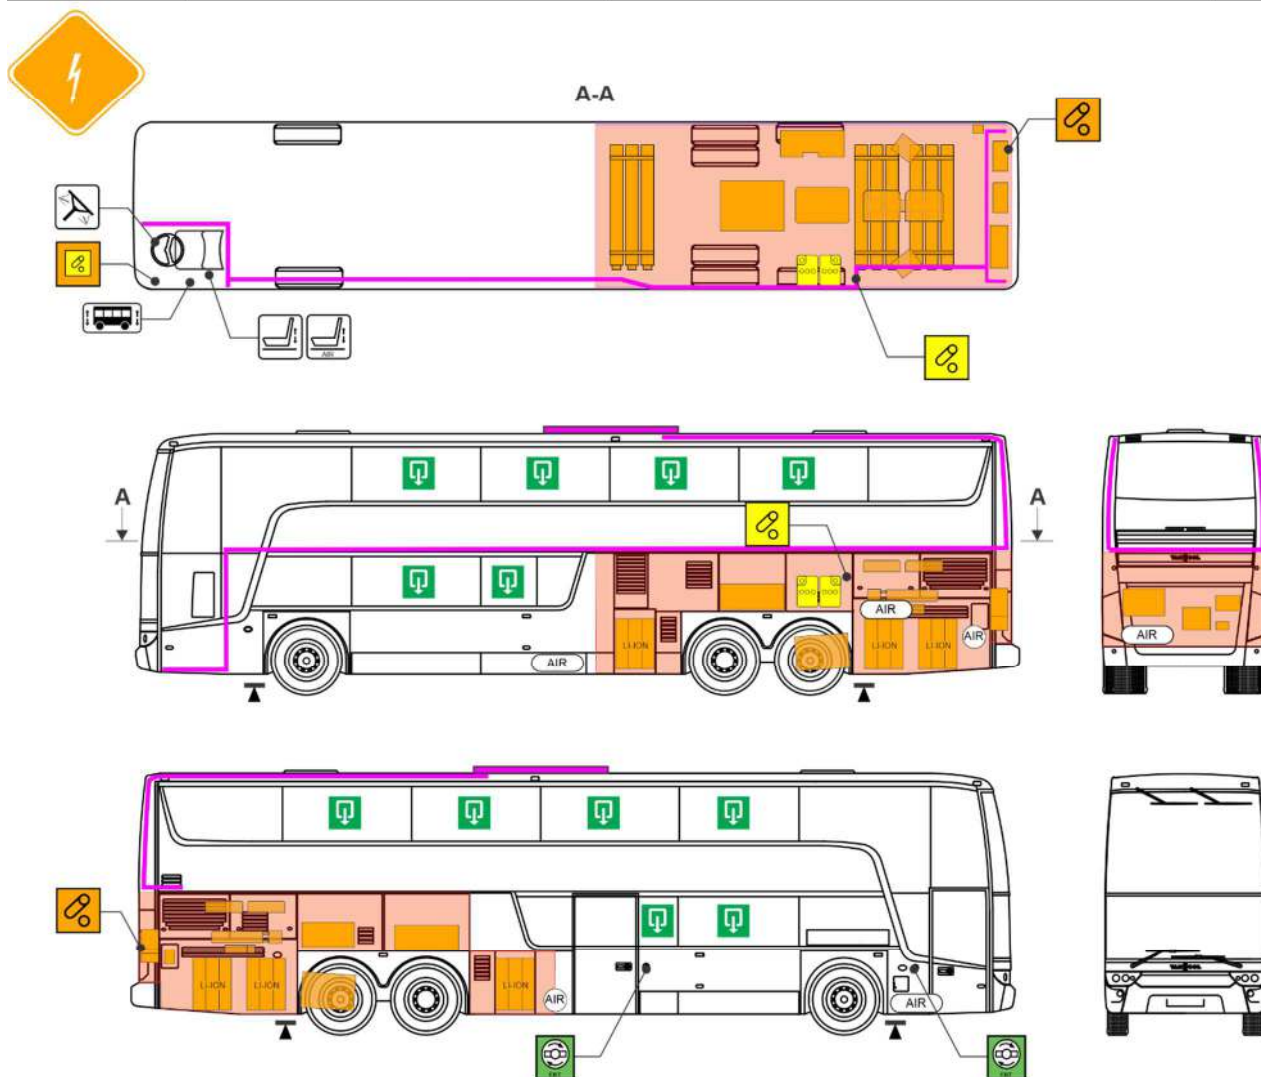

5. Stored energy / liquids / gases / solids

 High voltage traction batteries (Lithium Ion)		
 Air Conditioning		
 Low voltage battery		
 AIR Air tank		

6. In case of fire

 High voltage traction batteries (Lithium Ion)			
			20 feet
	- Never open the traction batteries for any reason or emergency, as it can lead to injury. - Use water as priority extinguishing agent. ABC fire extinguishers should only be used in case of the absence of water, or in the time before water is available. - Use large amounts of water to cool down the battery, and use natural openings (such as vents or opening from collision) to apply water inside the battery. - Use thermal imaging to monitor the temperature and the trend of cooling or heating. - Vehicle may only be released to second responders when the battery is completely cooled (no sign of smoke, fire or heating for at least one hour).		



7. In case of submersion



Once the vehicle is out of the water: take the same safety measures as mentioned in the documentation of the manufacturer and as described within this ERG, if you suspect damage or leakage of a traction battery.

8. Towing / transportation / storage



Warning, electricity.



Towing speed should never exceed 37 mph (60 km/h).

Drive axle half shafts (axle 2)

Before towing, the two axle shafts must be removed from the drive axle.

The hub openings have to be closed by means of a cover (special tool).

Towing fork

Behind the front-bumper of the vehicle, a threaded bush has been fitted to accept the towing fork supplied with the on-board toolkit.

Never lift the vehicle at the towing fork.



50 feet

- Do not store damaged battery together or in the vicinity of undamaged batteries.
- Maintain monitoring of the battery for heat signs.
- Safe storage area of damaged batteries must be free of flammable materials, only accessible by trained professionals, and 50 feet downwind of occupied structures.

Contact service@proterra.com to obtain specific instructions.

9. Important additional information

Because of the presence of high voltage, danger of electrocution should always be reckoned with, as high-voltage components or high-voltage cables can be damaged after an incident. Always de-energize the high-voltage circuit first! Always take into account the necessary personal protective equipment (PPE). Do not touch electrical components before the high-voltage circuits have been de-energized!



10. Explanation of pictograms used

	Warning, electricity
	Warning, low temperatures
	General Warning Sign
	Flammable
	Acute toxicity
	Corrosives
	Gases under pressure
	Harmful
	Prohibition: do not break open
	Hazardous to the human health
	Environmental hazard
	Explosive
	Safety perimeter

This chapter will be continued on the next page.



VAN HOOL EV
TDX25-E

VIN: 89500



Continued from previous page

10. Explanation of pictograms used

	Mandatory	Use water as priority extinguishing agent.
		ABC fire extinguishers should only be used in case of the absence of water, or in the time before water is available.
	Mandatory	Use Personal Protective Equipment (PPE)