

EMERGENCY RESPONSE GUIDE

RIDE 8TT Battery Electric Truck



RIDE

SHUTOFF PROCEDURE

SECURE: Gear to **N**, set **Parking Brake**, and **chock wheels**.

Method A Shutdown

Close all doors, turn ignition switch to off position.

Turn the 24-V Battery Disconnect Switch to OFF position

Method B Shutdown

Ignition switch to off position.

Turn the 24-V Battery Disconnect Switch to OFF position.


IF VEHICLE IS SUBMERGED

•**Do not wade:** if water is deeper than 9 inches (250 mm) **or** flooded section is longer than ¼ mile (500 m).

•**Avoid wading** whenever possible. If wading is unavoidable: Maximum speed: ≤ 9.3 mph (15 km/h).

•Reduce to ≤ 3.1 mph (5 km/h) if large water ripples/waves are present. Continuously monitor instrument panel for fault alarms and any acoustic/optical warnings during wading.

DO NOT attempt to remove manual service disconnects

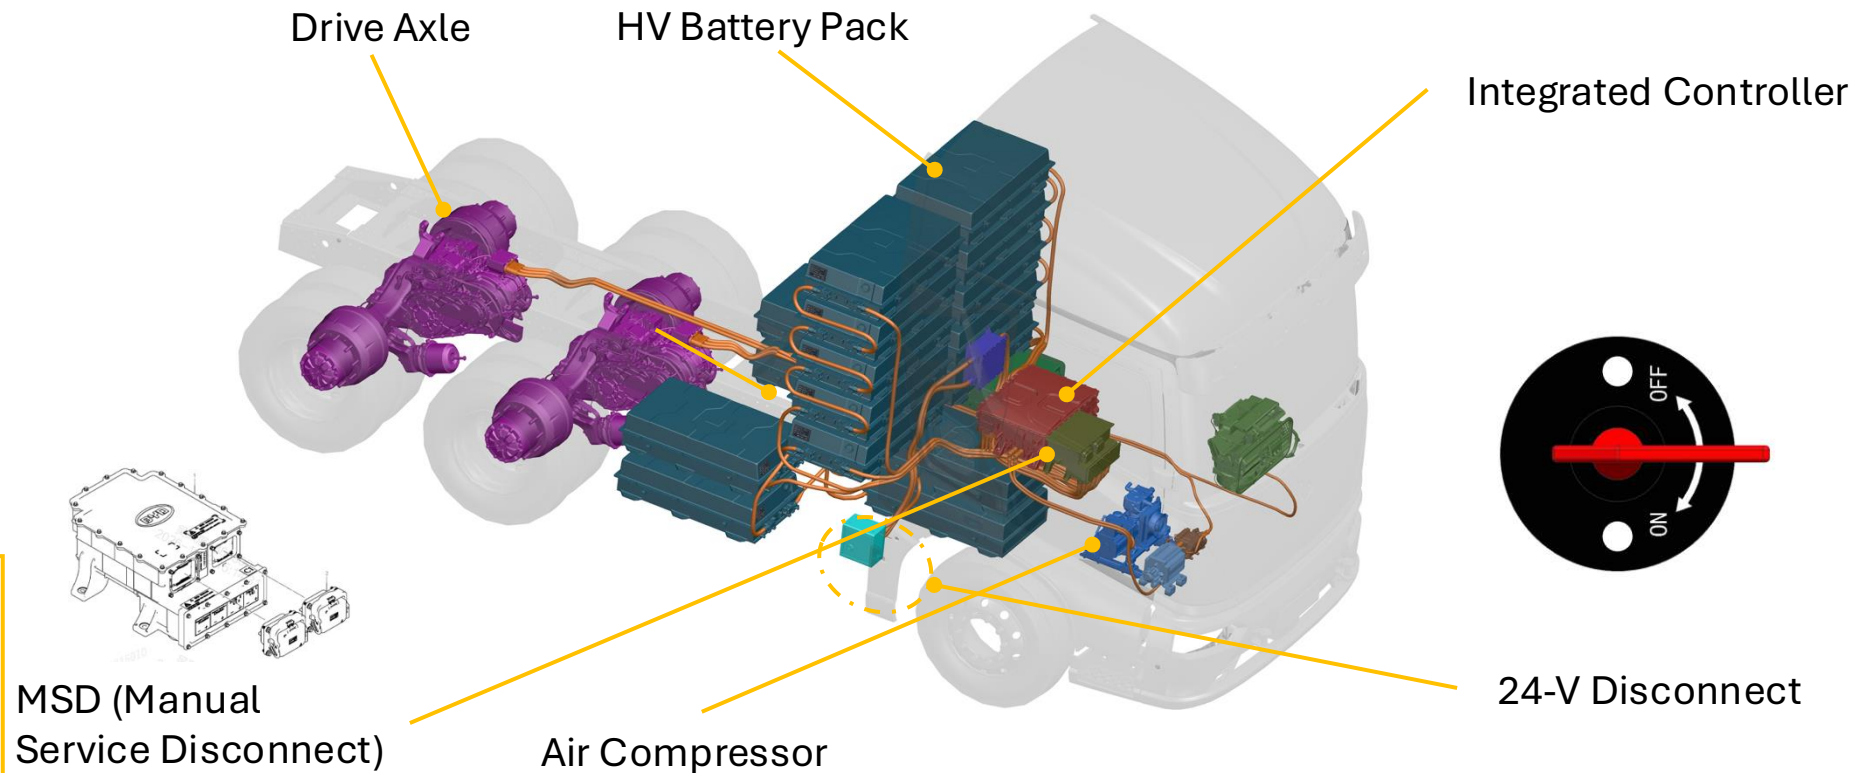

THERMAL EVENT

WARNING: If a thermal event occurs, use a dry powder or liquid carbon dioxide extinguisher. Do not use water or foam suppressors to extinguish. Continue with standard first responder procedures.

Manual Service Disconnect

The Maintenance Disconnect Switch is located under the cab, remove the plug to manually cut off the high voltage supply, shown in the figure above.

24-V Battery Disconnect Switch

The 24-V Battery Disconnect Switch is located on the curbside behind the front axle, rotate the knob to OFF position to cut off 24-V supply, shown in the figure at right.