
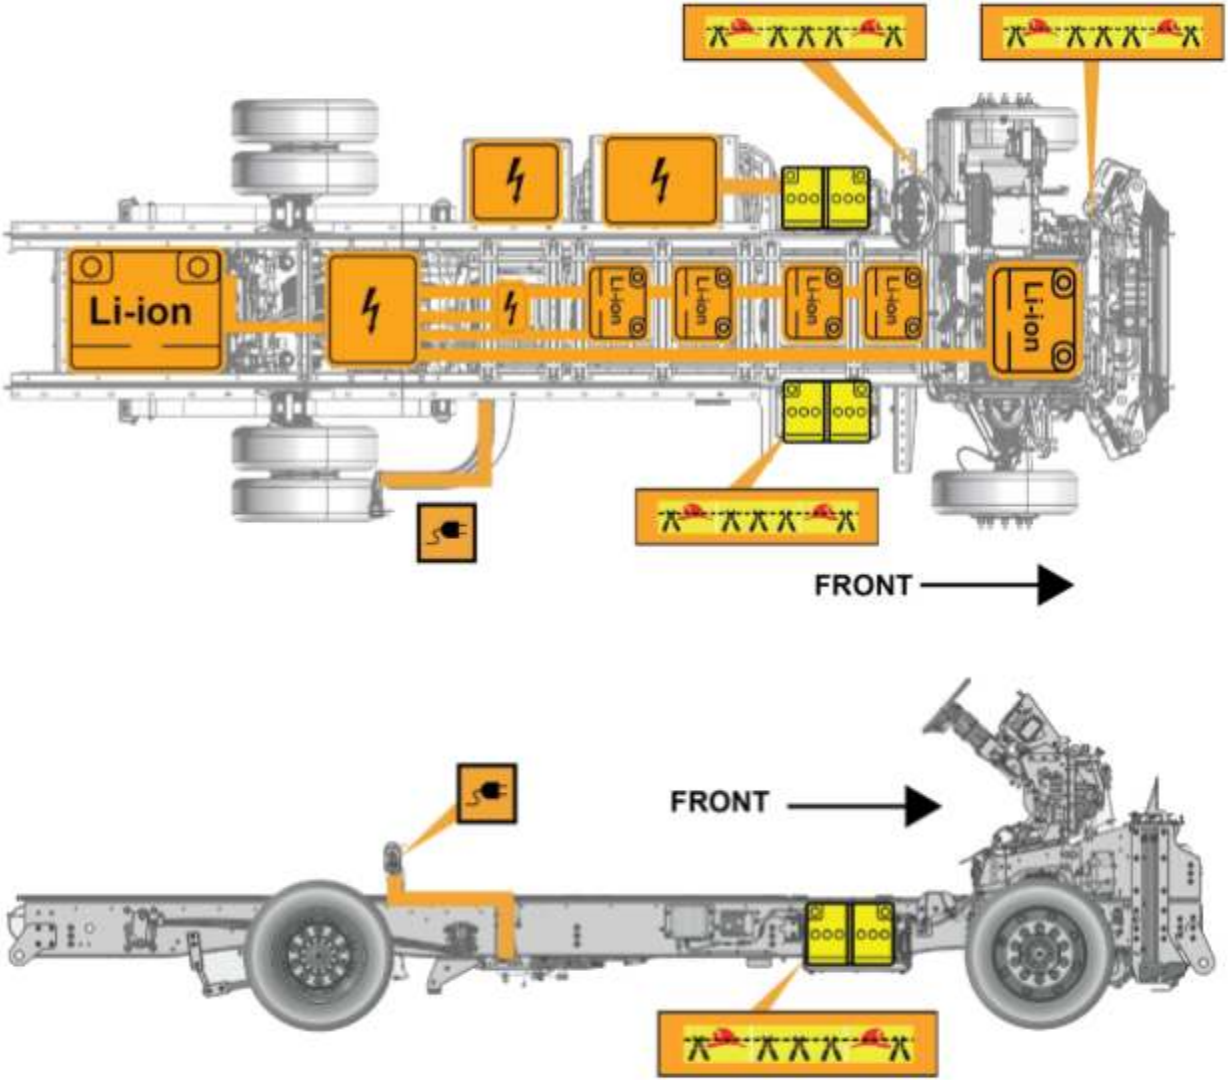





						
Electrical Propulsion	Charge Port	Battery Pack, High Voltage	High Voltage Component	Cable Cut	Battery Pack, Low Voltage	High Voltage Cable

	ID Number	Version Number	Page Number
	HRB-3001	1.1	1 of 6

1. Identification / recognition

Harbinger Motors Inc. manufactures electric-powered, incomplete vehicle chassis for upfitters.

External visual indicators

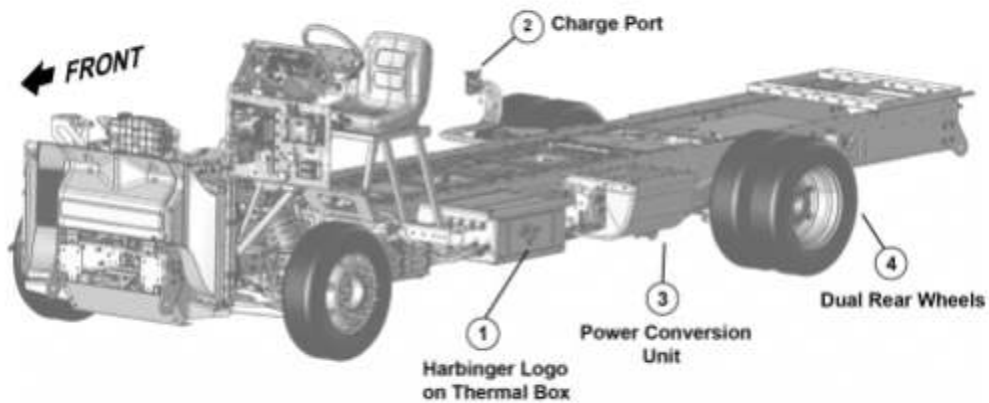


1	2	3	4
 Harbinger Logo displayed on Thermal Box	Charge Port located on the passenger side of vehicle	Power Conversion Unit (PCUS) OBCM	Dual Rear Wheels

	Our vehicle chassis is identified by the Incomplete Vehicle Manufacturer label, which is located near the driver's side door of the finished (upfit) vehicle.
---	---

WARNING! 	No airbag inflators, pyrotechnic devices, or related components are expected in proximity to the designated cut points external to the cab; nonetheless check before piercing vehicle, as the vehicle may be modified from the as-built configuration.
--	--

	ID Number	Version Number	Page Number
	HRB-3001	1.1	2 of 6

2. Immobilisation / stabilisation / lifting

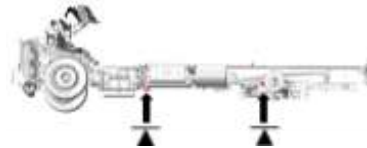	Press gear selector in P (PARK) to engage electronic parking brake.		Chock rear wheels to immobilize
			Vehicle may be lifted by lift points on frame rail

WARNING!



- NEVER lift the vehicle by the high voltage batteries under the vehicle.
- Do not use any suspension components as lift points

3. Disable direct hazards / safety regulations

Cut one of the three available first responder loops

		
Front of the vehicle, driver A-Side	Low Voltage Battery, Passenger B-Side	Left of steering column


WARNING!



Once a disconnect/cut point has been disconnected, the vehicle will become immovable and there will be no way to shift the transmission or release the electronic parking brake. The vehicle will have to be dragged or lift from the rear to move.


	ID Number	Version Number	Page Number
	HRB-3001	1.1	3 of 6

4. Access to the occupants

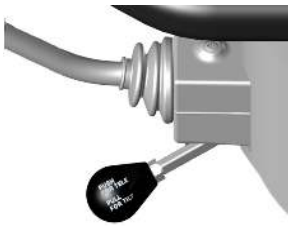

When the vehicle is in P (PARK). The steering wheel can be adjusted by pulling the steering wheel adjustment lever toward you to tilt up or down to gain access to patient.

5. Stored energy / liquids / gases / solids

6. In case of fire

	ID Number	Version Number	Page Number
	HRB-3001	1.1	4 of 6

7. In case of submersion

WARNING!



Once a disconnect/cut point has been disconnected, the vehicle will become immovable and there will be no way to shift the transmission or release the electronic parking brake. The vehicle will have to be dragged or lift from the rear to move.

8. Towing / transportation / storage



Flatbed towing is optimal.



Only tow from the rear axle. Lifted rear wheel off the ground. The steering wheel must be secured in a locked position to prevent swerving

9. Important additional information

Contact Harbinger Motors Inc. refer to the following:

Phone Number

Harbinger Service Support (619) 932-4978

E-Mail Address

service@harbingermotors.com


Company Address

Harbinger Motors Inc.

12821 KNOTT ST, GARDEN GROVE, CA 92841

	ID Number	Version Number	Page Number
	HRB-3001	1.1	5 of 6

10. Explanation of pictograms used

						
Electrical Propulsion	Charge Port	Battery Pack, High Voltage	High Voltage Component	Cable Cut	Battery Pack, Low Voltage	High Voltage Cable

						
Harbinger Motors Brand Logo	Risk of Flammability	Risk of damaging human health	Risk of toxicity	Risk of explosion	Risk of corrosive material	Gases under pressure

		
Use water to extinguish	Use IR Camera (Thermal Imaging)	High Voltage Warning

	ID Number	Version Number	Page Number
	HRB-3001	1.1	6 of 6