


NOVA BUS

NOVA BUS LFS HEV 32K PRODUCTION START 2009



REAR

FRONT

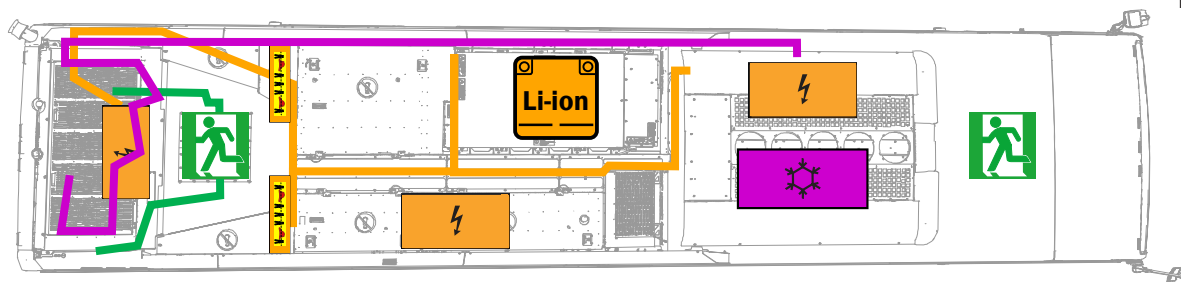

REAR

FRONT



FRONT

REAR



Emergency door opener	Break cover for access	Emergency exits	High-voltage Lithium-ion battery	Low-voltage device that disconnects high voltage	High-voltage power cable	High-voltage components
Location to Cut High-Voltage Interlock Loop	Low-Voltage Battery	Device to Shut Down Power in Vehicle	Lifting Point	Seat Adjustment	Steering Wheel Tilt Control	
Height Control	Air-Conditioning Unit	Air-Conditioning Line	Gas Strut Preloaded Spring	Air Tank	Diesel fuel	Fuel line

ID No.

Version No.

Page No.

00-00-45

02 (February 2026)


4

1. Identification/Recognition




The Nova Bus LFS Hybrid Electric Vehicle (HEV) has a diesel engine and an electric drive. There are several ways to identify the vehicle as an HEV if branding is not apparent. These include a high-voltage battery on the roof, orange HV cables in the motor compartment and inside roof fairings, high-voltage components with warning labels, etc. The exhaust system indicates the presence of a combustion engine.

2. Immobilization/Stabilization/Lifting



Vehicle height control in driver's compartment.



Seat height and forward/rear adjustment in driver's compartment.



The vehicle is **OFF** if the **MASTER CONTROL SWITCH** is in the **OFF** position.



Use only these lifting points.

IMMOBILIZATION PROCEDURE:

It is important to immobilize a vehicle in an emergency situation to prevent it from moving. See ERG section 2 for details.

3. Disable direct hazards/Safety regulations



- Shut down the high-voltage system using low-voltage devices.
- Shut down power in the vehicle.



- Yellow wires with this tag can be cut to shut down the high-voltage system.

4. Access to the Occupants



Access to the occupants can be achieved via one or two roof hatches, emergency exit windows, and doors.

Emergency responders must also consider the extraction of wheelchair passengers who are restrained by securement devices, the driver and his/her seat and compartment, the construction materials of the vehicle, no-cut zones, etc.

5. Stored Energy/Liquid/Gases/Solid

6. In case of fire

				
Follow all fire fighting and safety recommendations in the event of a fire.				

7. In Case of Water Submersion

	- If the vehicle should become submerged in water, the high-voltage system is isolated from the chassis and is designed to pose no shock hazard from touching the vehicle body. - Follow Section 3, Disable direct hazards/safety regulations of the ERG once out of water.
---	--

8. Towing/Transportation/Storage

 	- Check the condition and temperature of the high-voltage battery. - Towing on a flatbed is the preferred transport method. - Do not tow a vehicle that has been involved in an incident on its drive wheels, unless the high voltage has been shut down and the axle shafts have been removed. - Park the vehicle at least 50 feet (15 meters) from buildings and other vehicles (quarantine area).
---	---