

EMERGENCY RESPONSE GUIDE

RIDE Type D Electric School Bus



SHUTOFF PROCEDURE

SECURE: Gear to **N**, set **Parking Brake**, and **chock wheels**.

Method A Shutdown

Close all doors, turn ignition switch to off position.

Turn the 24-V Battery Disconnect Switch to OFF position

Method B Shutdown

Ignition switch to off position.


Turn the 24-V Battery Disconnect Switch to OFF position.

IF VEHICLE IS SUBMERGED

- **Do not wade:** If water is not higher than the first step, drive slowly out of the water.

- If water is higher than the first step, press and hold the START/STOP Button to shutoff the bus and then evacuate.

DO NOT attempt to remove manual service disconnects

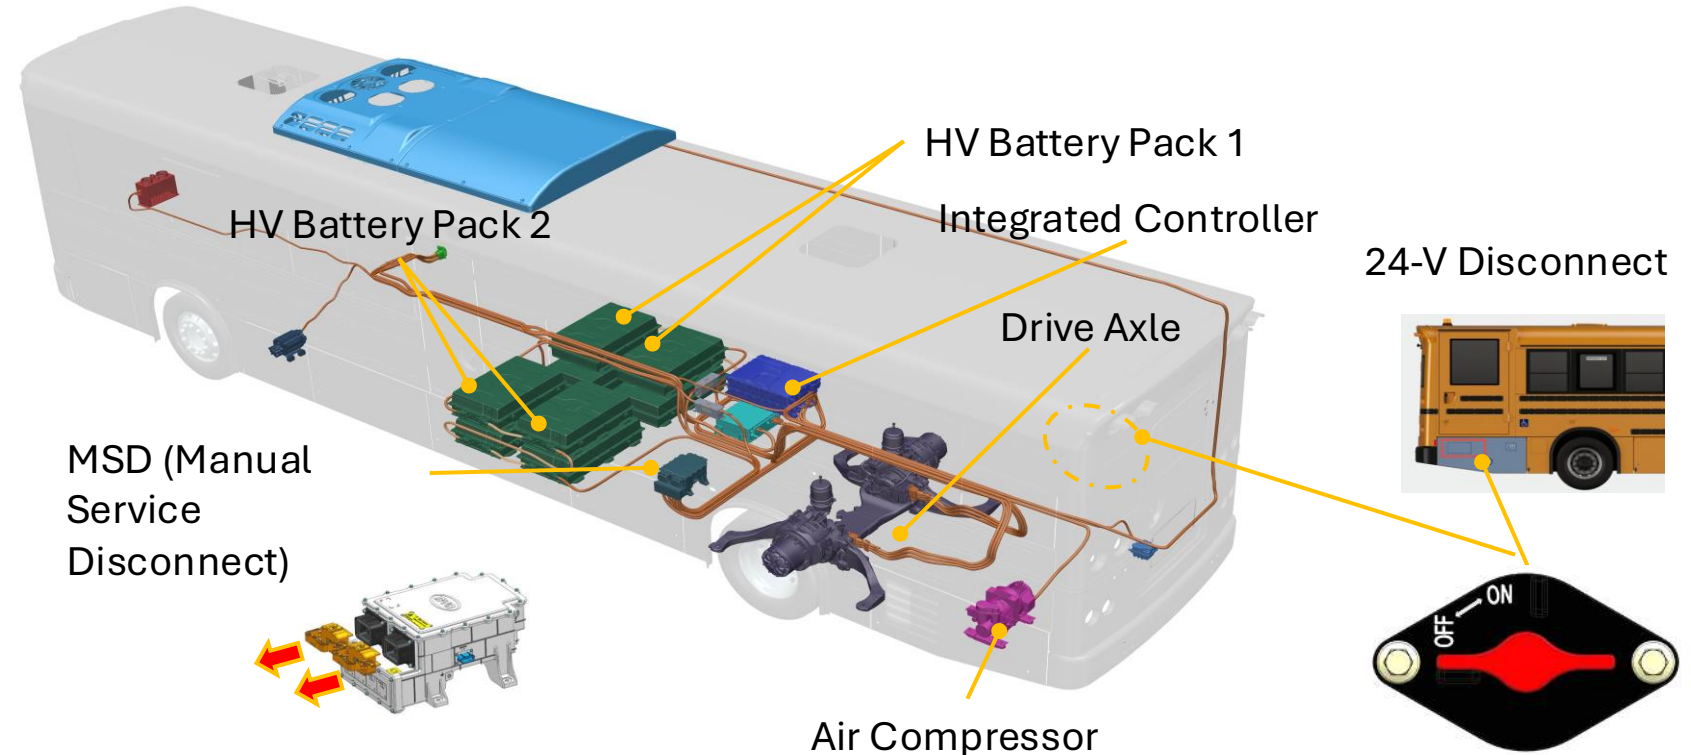

THERMAL EVENT

WARNING: If a thermal event occurs, use a dry powder or liquid carbon dioxide extinguisher. Do not use water or foam suppressors to extinguish. Continue with standard first responder procedures.

Manual Service Disconnect

The Maintenance Disconnect Switch is located street side behind the front axel. Remove the plug to manually cut off the high voltage supply.

24-V Battery Disconnect Switch

The 24-V Battery Disconnect Switch is located on the curbside behind the front axle, rotate the knob to OFF position to cut off 24-V supply, shown in the figure at right.