




CHEVROLET Corvette E-Ray/ZR1X 2 Door Convertible 2024 -

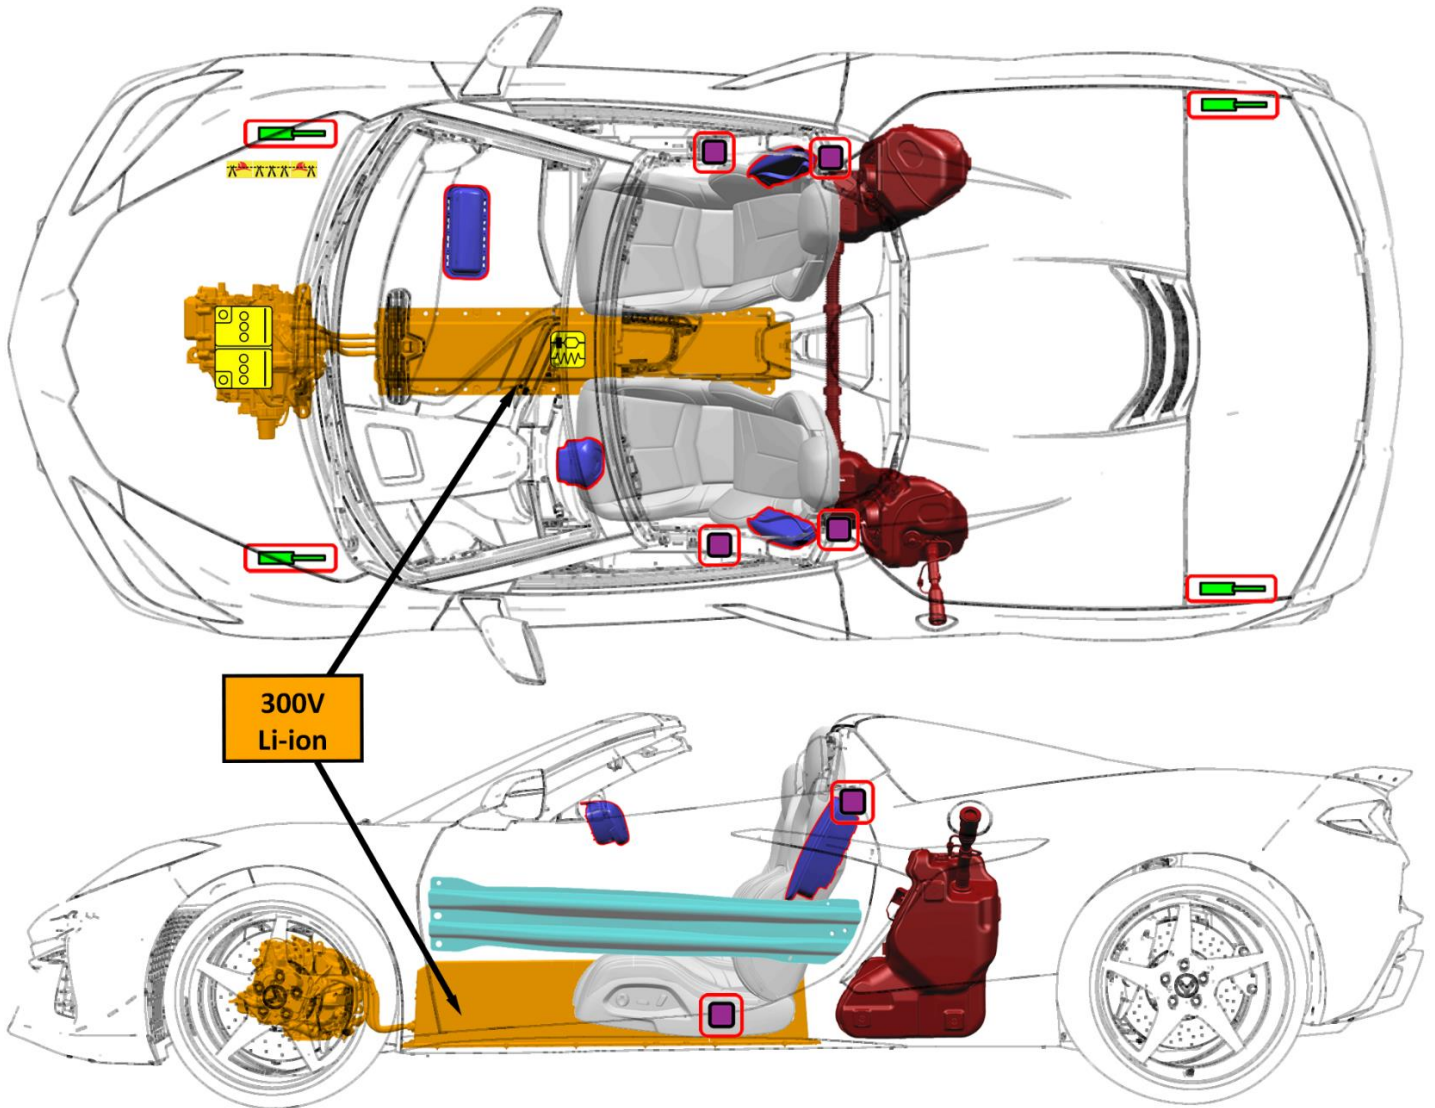

	Airbag		Seat belt pretensioner		SRS control unit		Gas strut/Preloaded spring		High strength zone
	Low voltage Li-ion battery		Fuel tank		High voltage Li-ion battery		High voltage power cable or component		Cable Cut Location

DO NOT CUT ANY ORANGE COLORED HIGH VOLTAGE CABLES.

Identification Number

1G1-23102

Version Number

3

Page Number

Page 1 of 4

1. Identification / recognition



Lack of engine noise does not mean vehicle is off: vehicle movement capability exists until vehicle is fully shut down. Always wear appropriate PPE.

Emblems and Badging

Front

Rear

Side



First Responder Information Label

2024-2025


2026 and later



2. Immobilization / stabilization / lifting

IMMOBILIZE VEHICLE:

1. Block the wheels.
2. Press the Electric Parking Brake (EPB) switch momentarily. The red parking brake status light will flash and then stay on once the EPB is fully applied.
3. Press the button at the front of the shift selector to shift to P (Park).

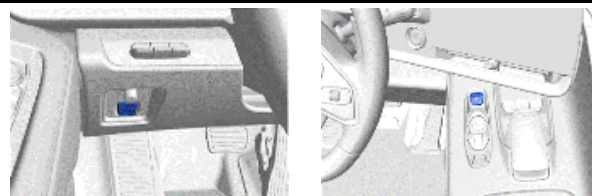


LIFTING POINTS:



The primary lifting points for this vehicle are located on the frame rails. These locations can be identified by slots in the bottom surface of the frame rail. Lift adapters should be used to prevent vehicle damage.

Do NOT lift the vehicle from any locations on the high voltage battery.

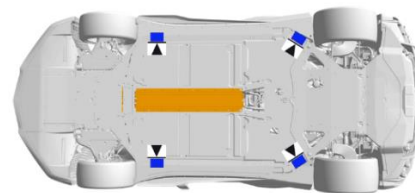

3. Disable direct hazards / safety regulations



The vehicle is equipped with a 12v battery management system with internal fault detection, including thermal runaway alert and mitigation. To keep thermal runaway alert available, DO NOT disable the 12v battery. Thermal runaway mitigation is only available when the vehicle is powered.

In the event of a "Battery Danger Detected, Safely Exit Vehicle" notification, DO NOT disable the 12v battery to disable the horn.



MAIN METHOD:

1. Press the POWER button to disable vehicle propulsion.
2. Consider any manipulations of power devices in the vehicle (steering wheel, power seats, windows, etc.) prior to disabling the 12v battery.




3. Open the hood using one of the three methods:

- Release switch on driver door.
- Touchpad switch in left side grille area.
- Release cable in driver's footwell.



4. Remove the front compartment side sight shields.
5. Remove the front compartment rear access cover.



-



4. Access to the occupants

11

114



- Pull up on the lever to release the door latch.

- ## 2) Recliner Control



6. In case of fire



DO NOT CUT ANY ORANGE COLORED HIGH VOLTAGE CABLES.

Page 3 of 4

7. In case of submersion

The high voltage battery is isolated from the vehicle chassis. If the vehicle is immersed in water, you will not be electrocuted by touching the vehicle.

After the vehicle was removed from the water, do the following:

1. Allow the vehicle to dry out.
2. Perform the high voltage disabling procedure in Section 3.

8. Towing / transportation / storage

Towing and Transportation

Carefully open the cover in the fascia by using the small notch that conceals the tow eye socket.


Install the tow eye into the socket and turn it until it is fully tightened. When the tow eye is removed, reinstall the cover with the notch in the original position.



General Motors recommends a flatbed carrier or tow dollies to transport a disabled vehicle.



Moving the vehicle with the drive wheels on the ground will generate unwanted energy. Limit the movement of the vehicle to the distance required to prepare the vehicle for towing.

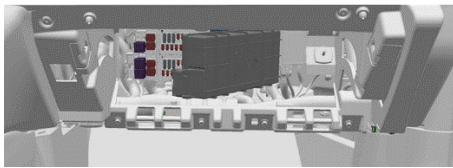

If the horn must be disabled prior to transport, locate and remove the horn fuse from the instrument panel electrical center located behind the instrument panel compartment.

1. Remove the instrument panel compartment.
2. Remove the fuse block cover.
3. Locate and remove the horn fuse.

Storage and Disposal

Store the vehicle outside at a safe distance (15 meters / 50 feet) or separated from flammable objects.

The high voltage battery and leaked battery fluids should be properly disposed of according to local regulations. General Motors recommends removing and recycling the battery. Refer to [recyclemybattery.com](https://www.recyclemybattery.com) for more information.



Potential for continued hazards (rekindling/re-gassing/etc) if a damaged vehicle battery is jostled during recovery, including the towing and storage process.

9. Important additional information

This vehicle is supported by OnStar, where available.

10. Explanation of pictograms used

	Air Conditioning Component		Li-ion Battery		Cable Cut Location
	Corrosive		Electric Vehicle		Explosive
	Flammable		Gasoline		General warning sign
	Injury Risk		Li-ion Battery		Lifting Points
	Thermal Imaging Camera		Toxic		Use Water
	Warning, Electricity				