




Genesis GV70
SUV, 5door
December, 2024



0

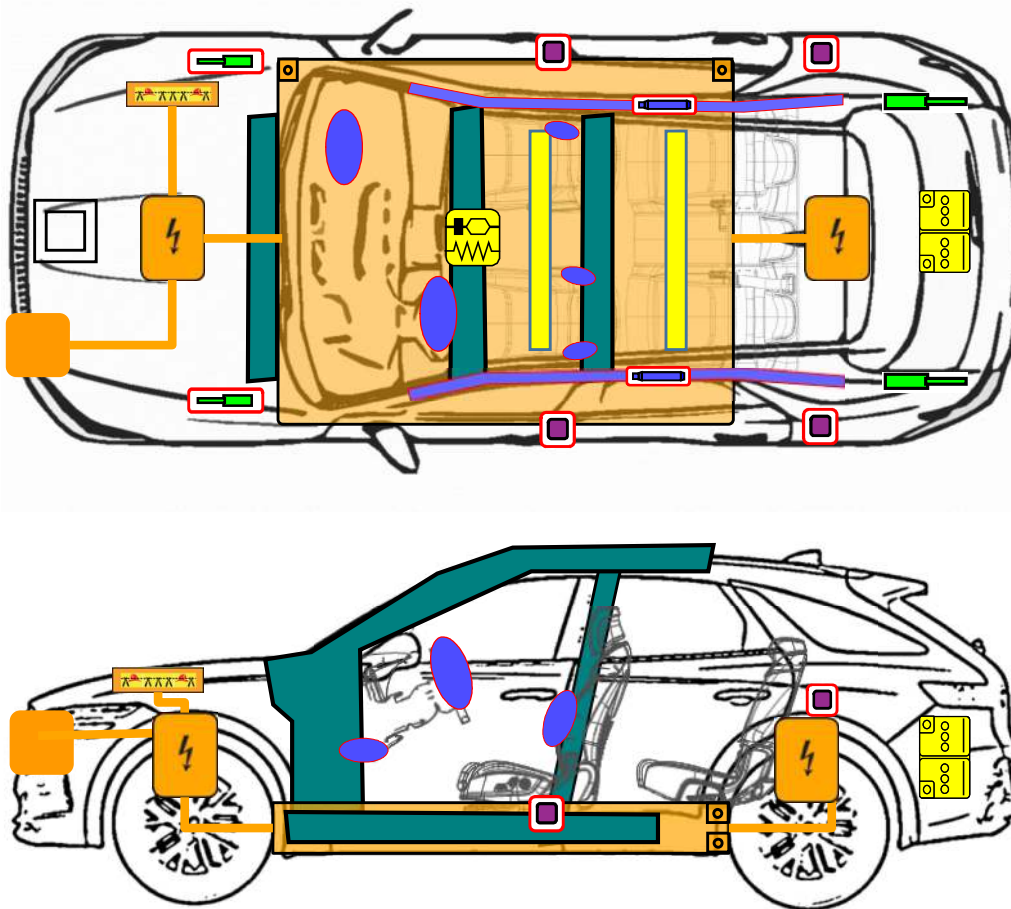

	Airbags		Airbag Inflator		Seatbelt Pretensioner		Airbag Control Unit
	12V Battery		Gas Struts		High-Strength Steel		High Voltage Components
	High Voltage Battery		High Voltage Wiring		High Voltage Disconnect		

1. Identification / Recognition

Brand Logo



Charging Door

GV70

Model Name



2. Vehicle Stabilization / Securing / Lifting

Vehicle Securing:

1




1. For vehicles with automatic transmissions, press the brake pedal and shift the gear to Parking mode by pressing the “P” button.

2




2. Engage the Electronic Parking Brake (EPB) by pulling the switch and secure the wheels.

Vehicle Lifting Points Underneath the Vehicle: ■ ▲

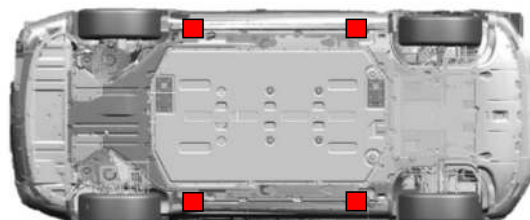


3. Direct Hazard Deactivation / Safety Regulations

■ Access to the 12V Battery (Located in the Trunk):



① Press the trunk release button on the lower driver's side or the trunk switch.

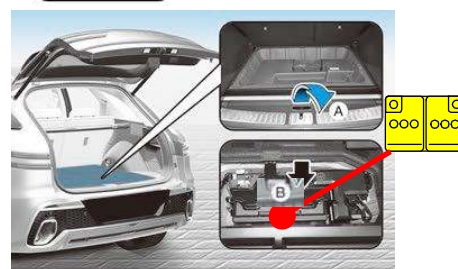

② Remove the tray inside the trunk board.


Deactivation Method:

- 12V Battery 

① Ignition Off.

② Disconnect the Negative Terminal

③ Disconnect the Positive Terminal

- H.V. Battery 

 The "high-voltage switch" does not fully detach. 

① Open the fuse box cover

② Pull the HV cut-off switch



4. Occupant Access Methods

Seat Adjustment:



Steering Column Adjustment:



Glass Specifications:




1-2 : Laminated Glass

3 : Standard: Tempered Glass / Option: Laminated Glass


4-5 : Tempered Glass

High-Strength Steel Frame:

-  High-Strength Steel(100K ↑)
-  CFRP

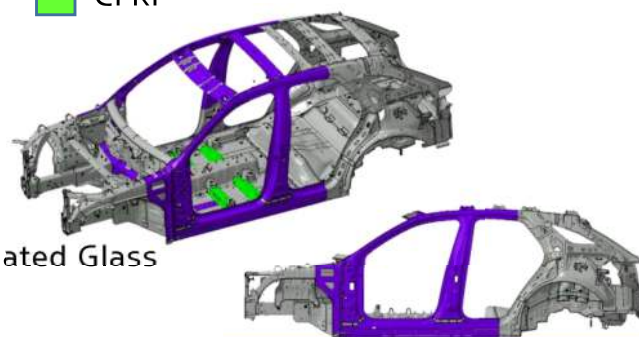

5. Stored Energy / Liquids / Gases / Solids

	697V		     
	12V		     
	12V		  
	R-134a	900g	   
	R-1234yf	900g	



In case of coolant leakage from the battery pack, thermal runaway may cause instability. Check the battery pack temperature using a thermal imaging camera.



6. In Case of Fire




Use a large amount of water.



Warning: Battery Reactivation!

■ Gas Struts!

They may explode due to heat exposure

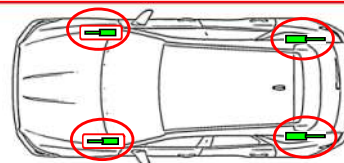


7. In Case of Submersion



Do not touch high-voltage components, including the high-voltage cut-off switch or cables, as there is a risk of electric shock during submersion. Perform vehicle operations only after it has been removed from the water.

8. Towing / Transport / Storage

OK :

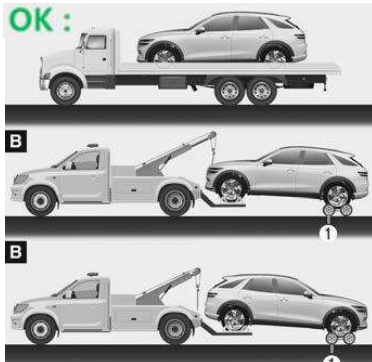


Not OK :



Front Hook

Rear Hook

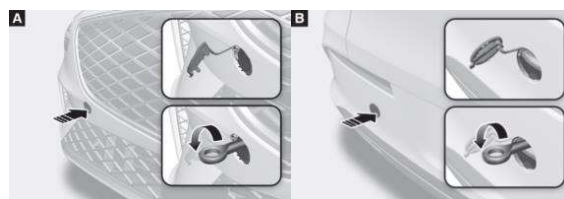

9. Pictogram Description

	EV Indicator		Electric Warning
	General Warning Sign		Flammable
	Corrosive		Danger to Human Body
	Explosive		Toxic
	Air Conditioning System		Low temperature warning
	Use of Thermal Imaging Camera		Extinguish Fire with Water
	Hood		Trunk Hood