
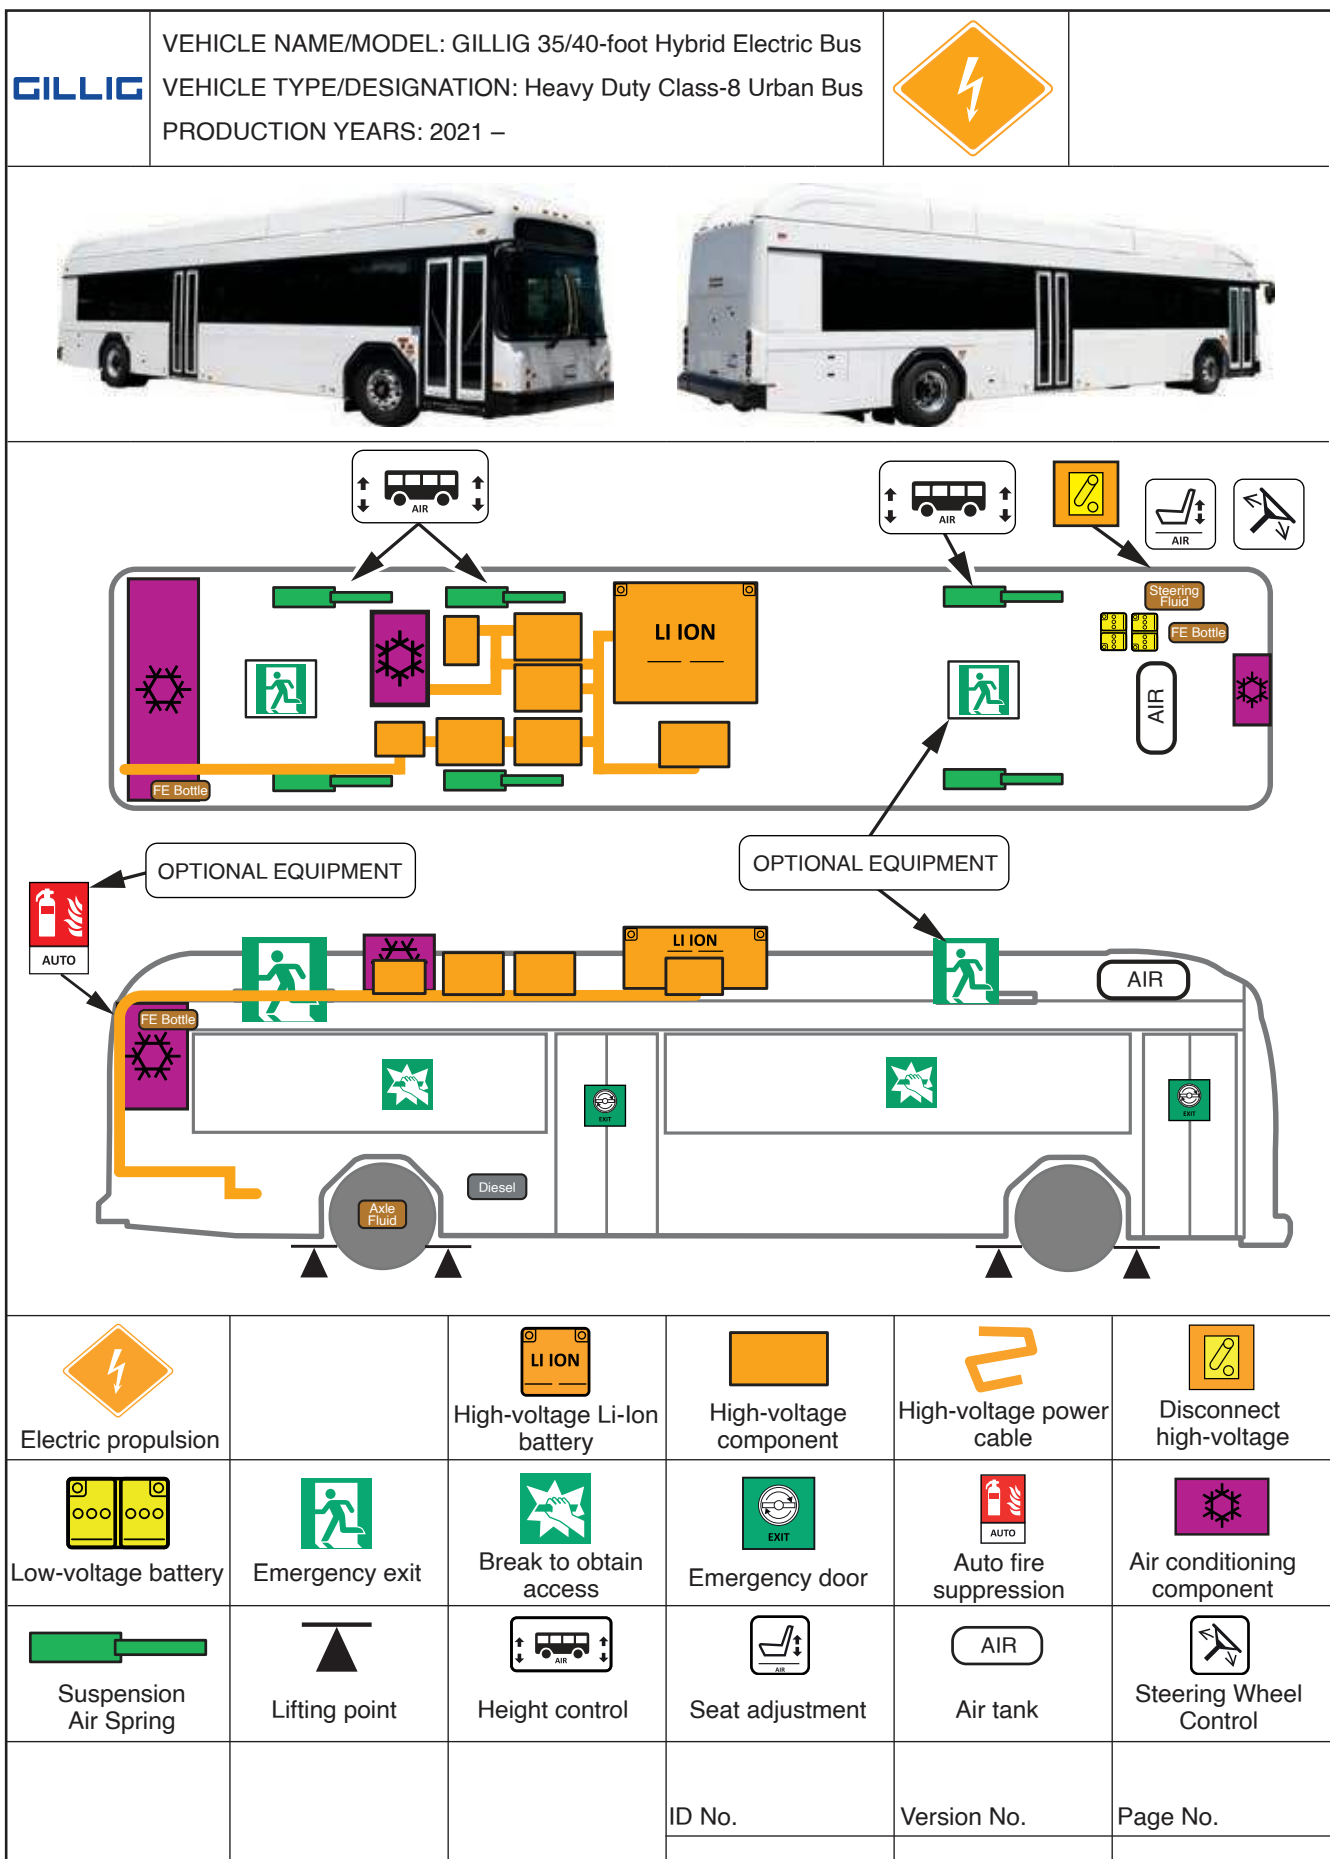

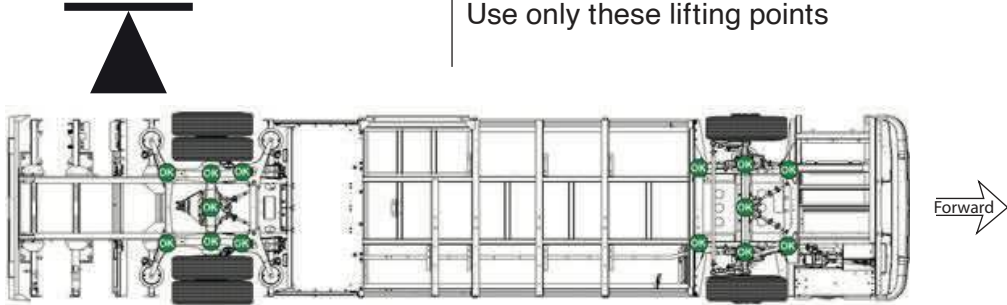




1. Identification / Recognition	
	Hybrid Electric bus
2. Immobilisation / Stabilisation / Lifting	
	Bus height control in driver cabin
	Steering wheel, tilt control
	Seat height adjustment in driver cabin
	Use only these lifting points
3. Disable direct hazards / Safety regulations	
	Shutdown high voltage When circumstances allow, park the bus in a safe location, set the parking brake, and select “neutral” on the shift selector. Use 12/24V switch to disable HV 
4. Access to the occupants	
	One front door exit Rear door is optional
	One rear roof hatch standard An additional roof hatch is optional
	Break these windows to obtain access

5. Stored Energy / Liquids / Solids			
			
			
			
			
			
6. In case of fire			
			
			
7. In case of submersion			
		Follow heading 3. Disable direct hazards / safety regulations once out of the water	
8. Towing / Transportation / Storage			
		Check battery temperature Remove driveshaft/axle shafts for towing	

**THIS PAGE
INTENTIONALLY
LEFT BLANK**