
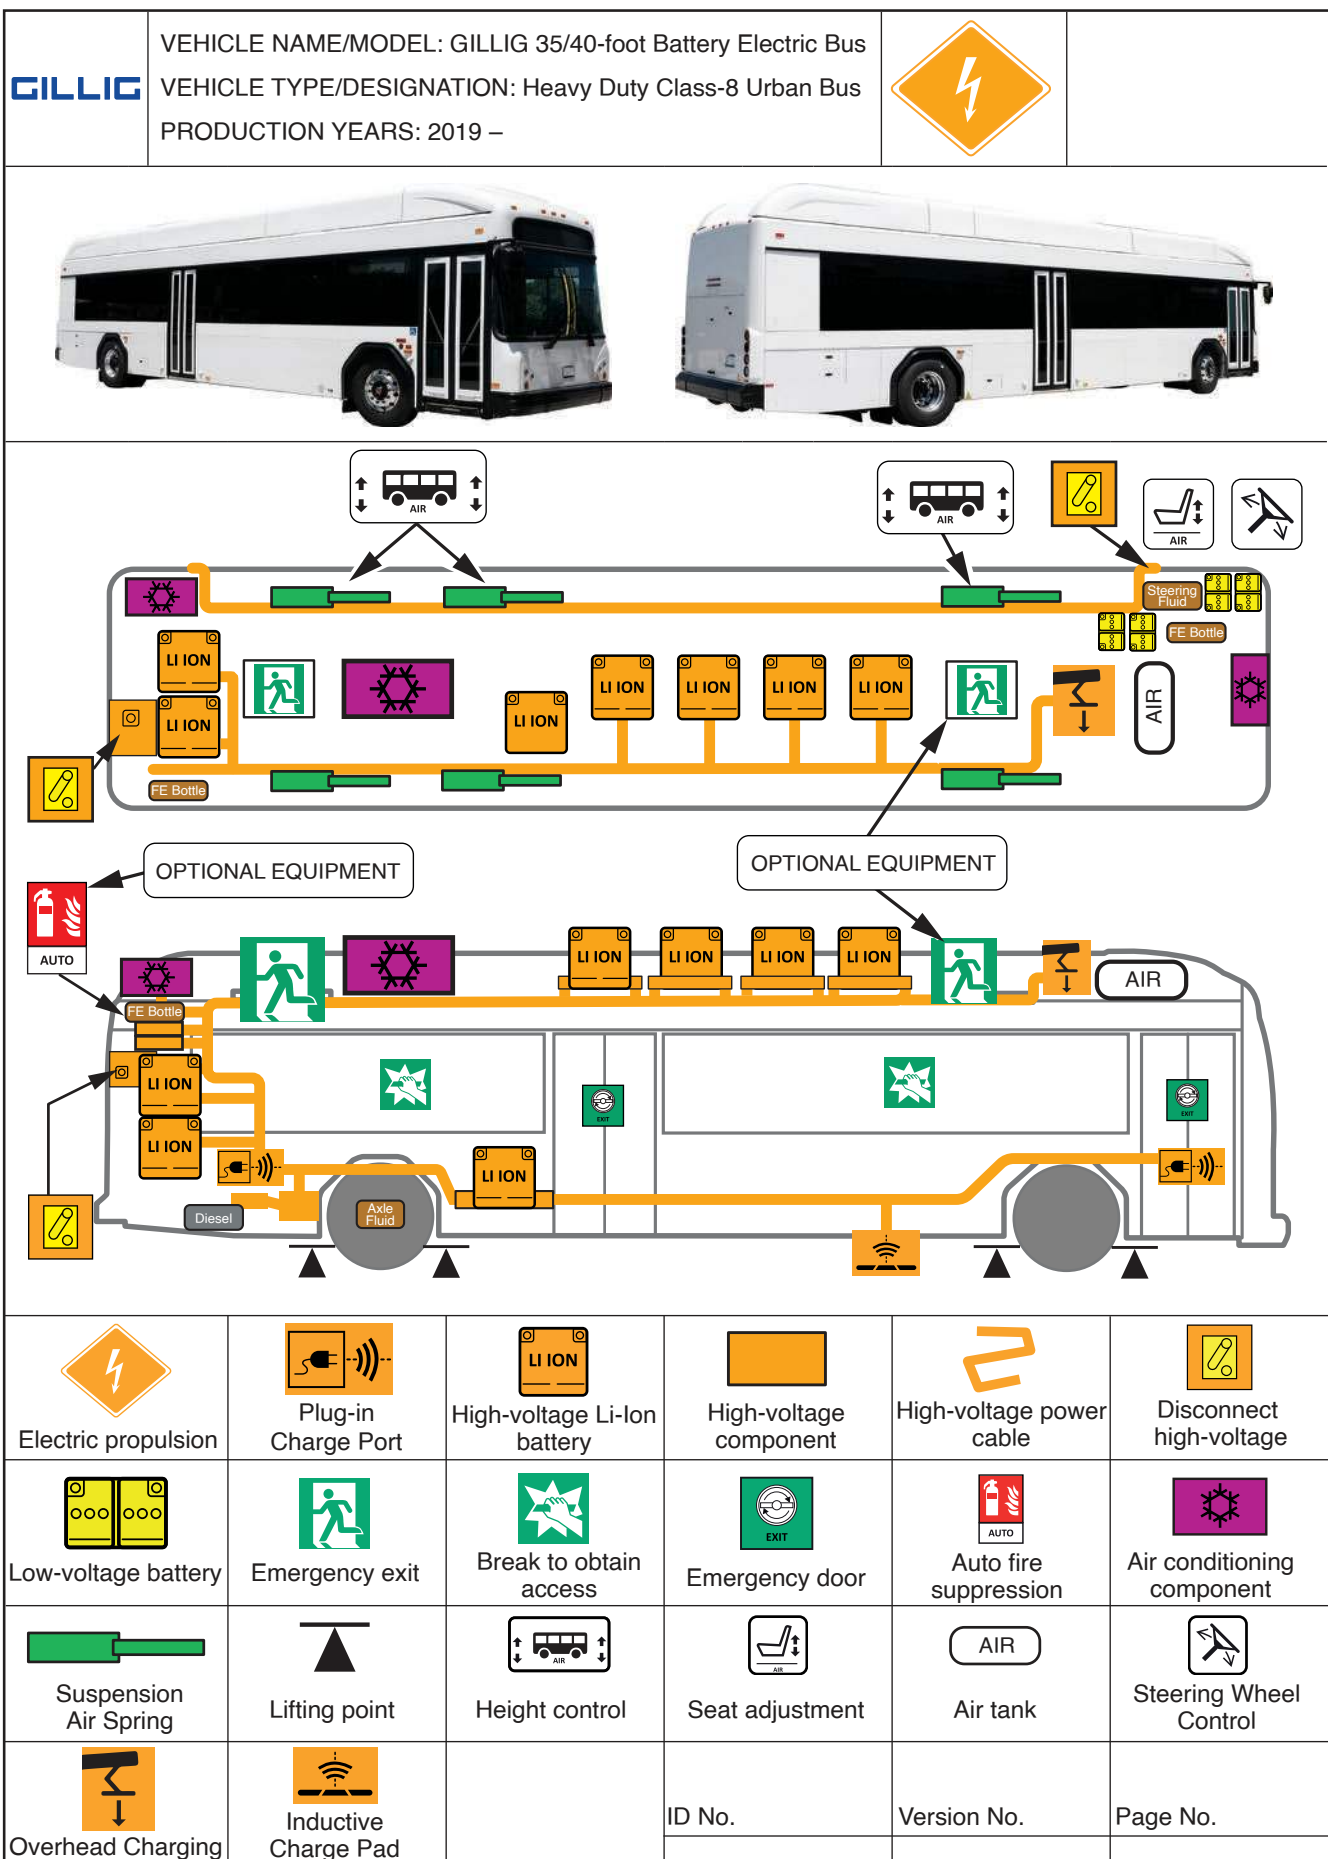

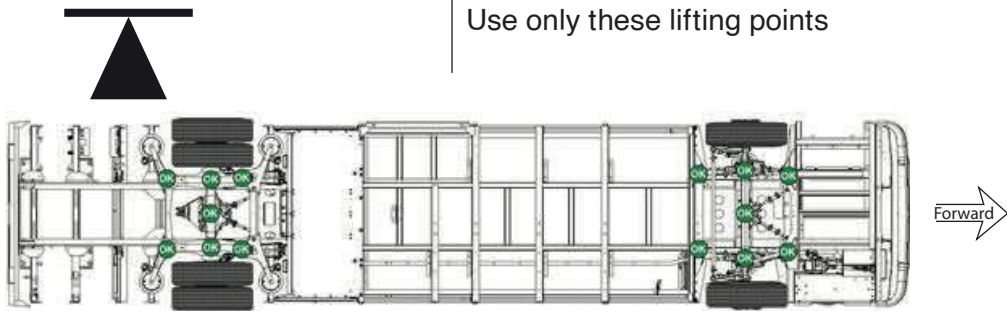




1. Identification / Recognition	
	Electric bus with plug in charging and optional high voltage inductive or overhead conductive charging
2. Immobilisation / Stabilisation / Lifting	
	Bus height control in driver cabin
	Steering wheel, tilt control
	Seat height adjustment in driver cabin
	Use only these lifting points
3. Disable direct hazards / Safety regulations	
 When circumstances allow, park the bus in a safe location, set the parking brake, and select "neutral" on the shift selector.	Shutdown high voltage (available in two locations) Use 12/24V switch to disable HV  High-Voltage Disconnect Switch 
4. Access to the occupants	
	Two door exits
	Two roof exit
	Break these windows to obtain access

5. Stored Energy / Liquids / Solids			
			
			
		Plug-in Charge Port	
		Overhead Charging	
		Inductive Charge Pad	
			
			
			
6. In case of fire			
			
			
7. In case of submersion			
	Follow heading 3. Disable direct hazards / safety regulations once out of the water		
8. Towing / Transportation / Storage			
		Check battery temperature Remove driveshaft/axle shafts for towing	

**THIS PAGE
INTENTIONALLY
LEFT BLANK**