




Top View

|  |                       |  |                          |  |                                        |  |                        |
|--|-----------------------|--|--------------------------|--|----------------------------------------|--|------------------------|
|  | Airbag                |  | Battery, low voltage     |  | Seat belt pretensioner                 |  | SRS control unit       |
|  | Battery, high voltage |  | High-voltage power cable |  | Low voltage disconnect to high voltage |  | Dangerous high voltage |

## 1. Identification / recognition

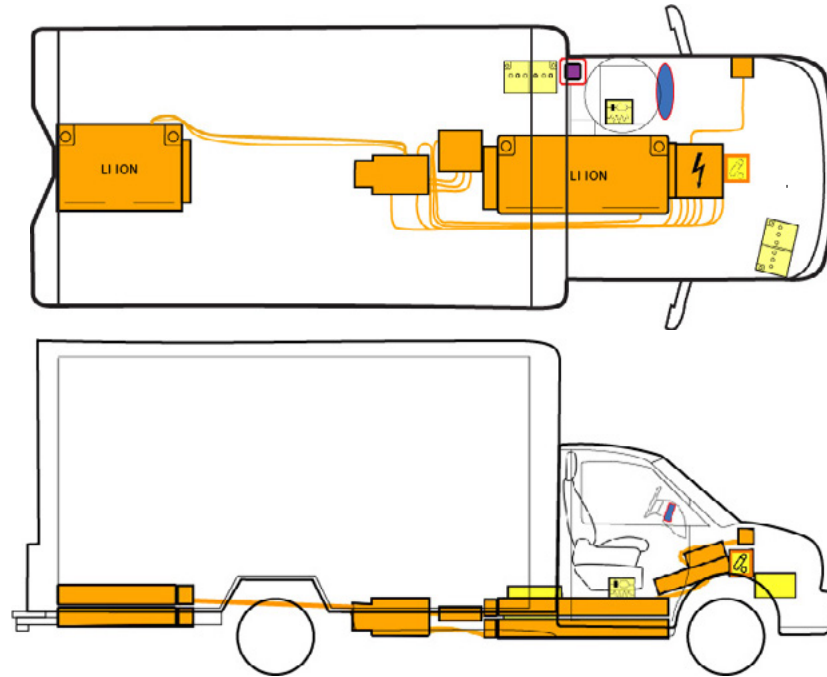

The electric motor is silent. Vehicle movement is capable until vehicle is fully shut down.



### Additional Information

Major electrical design is consistent across body variations.

### Document Number

OPS-F-031

### Version

R1

### Page

1 of 4



## 2. Immobilization / stabilization / lifting

### Immobilize the vehicle

Apply parking brake  
Put vehicle in Park  
Turn off vehicle


Parking  
Brake



Park Selector



Lifting points  
(on frame only)

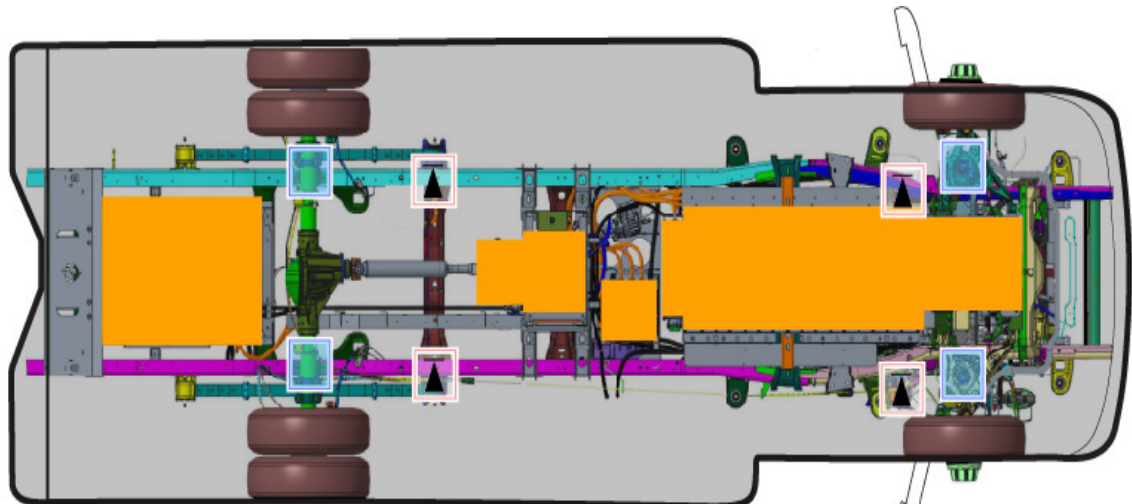

Jacking points

Lifting points



HV components



Bottom View

## 3. Disable direct hazards / safety regulations



Do not touch, cut, or open high-voltage components and batteries.

### Method 1 - Preferred

Step 1: Turn off ignition.




Step 2: Disconnect negative terminals from 12V batteries located on passenger side under the hood and on the driver side behind the cab.

### Method 2 - If Method 1 cannot be completed

Step 1: Cut wire in location shown below.

Step 2: Disconnect negative terminals from 12V batteries located on passenger side under the hood and on the driver side behind the cab.



12V locations



Cut wire location




# QRG Lightning eMotors Cargo Express 4500 2022-20XX

## Method 3 - If Methods 1 and 2 cannot be completed

Step 1: If possible, turn off ignition.

Step 2: If possible, disconnect negative terminals from 12V batteries located on passenger side under the hood and on the driver side behind the cab.

Step 3: Remove the stacked Manual Service Disconnects (MSD) from all four batteries.

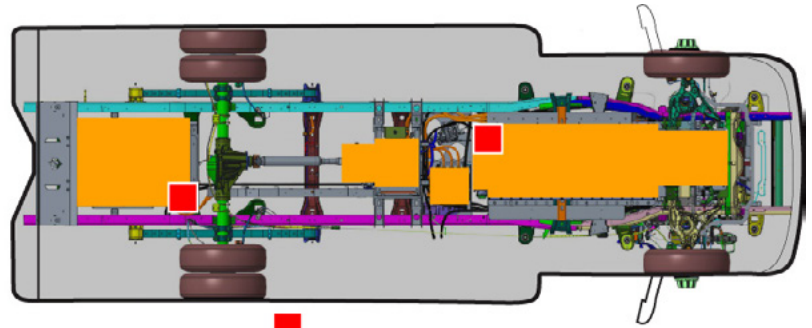

Four (4) MSD locations

Bottom View




MSD



Stacked MSDs

## 4. Access to occupants

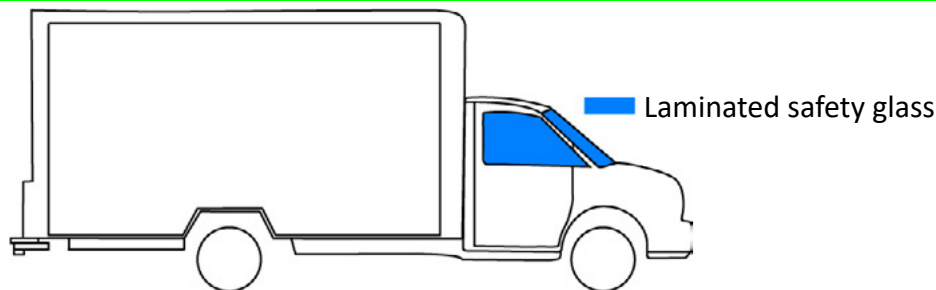


## 5. Stored energy / liquids / gasses / solids

350V



12V



There is an increased risk of a thermal reaction in the high-voltage battery if there is a significant loss of coolant. Monitor temperature of the high-voltage batteries using an infrared camera.



## 6. In case of fire

Use copious amounts of water directly on high-voltage battery to extinguish fire.



Damaged lithium-ion batteries may re-ignite after the fire is extinguished. Monitor temperature of the high-voltage batteries using an infrared camera.



### Additional Information

Access to occupants may not be consistent across body variations.

### Document Number

OPS-F-031

### Version

R1

### Page

3 of 4



## 7. In case of submersion

If possible, turn the ignition off in a submerged vehicle to disable the high-voltage system.


No other disabling activities are to be attempted.

Immobilize the vehicle, allow it to dry, and then perform disabling steps in Section 3.



Submerged vehicles pose an increased risk for producing secondary fire events (re-ignition).

## 8. Towing / transportation / storage

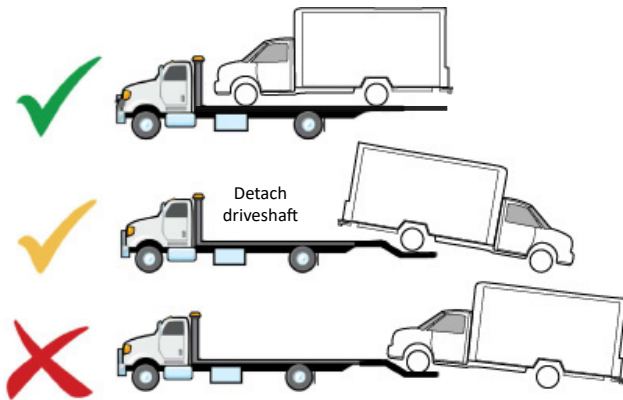

1. Deactivate high-voltage system (see Section 3).

2. Perform an inspection for evidence of active fire or smoldering. Visual or audible clues include gurgling, bubbling, popping, crackling or hissing noises.

3. Confirm high-voltage batteries are not rising above ambient temperature using an infrared camera.

4. Load vehicle for transport.

5. Park vehicle outdoors at least 50 feet from buildings or other vehicles.



Damaged lithium-ion batteries may re-ignite after the fire is extinguished.  
Use infrared camera to confirm battery temperature is not rising above ambient before towing.



## 9. Important additional information

### 10. Explanation of pictograms used



Flammable



Explosive



Hazardous to  
human health



Environmental  
hazard



Acute toxicity



General  
warning



Use lots of  
water to  
extinguish fire




Lithium-ion  
battery



Corrosive



High-voltage  
warning



Use infrared  
camera



Lifting  
points