LINCOLN Corsair Hybrid

2027

INFORMATION FOR FIRST AND SECOND RESPONDERS

EMERGENCY RESPONSE GUIDE

LINCOLN CORSAIR

HYBRID





CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

VERSION:
Lincoln_Corsair_2027_v01

LINCOLN Corsair Hybrid

2027

CONTENTS

1. Identification / recognition Page 4

2. Immobilization / stabilization / lifting Page 9

3. Disable direct hazards / safety regulations Page 12

4. Access to the occupants Page 18

5. Stored energy / liquids / gases / solids Page 28

6. In case of fire Page 29

7. In case of submersion Page 33

8. Towing / transportation / storage Page 34

9. Important additional information Page 38


10. Explanation of pictograms used Page 38

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

VERSION:
Lincoln_Corsair_2027_v01

LINCOLN Corsair Hybrid

2027

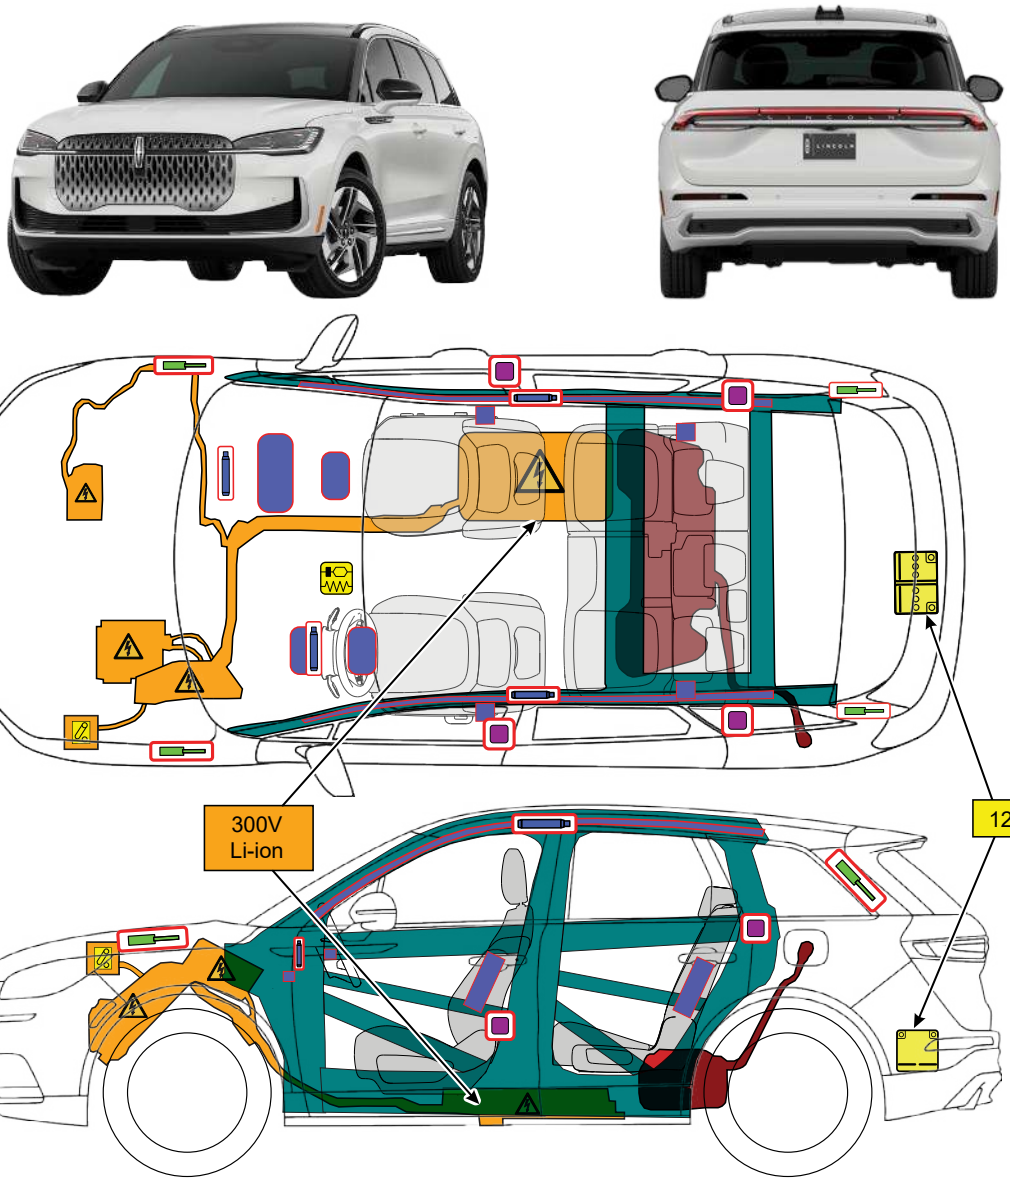

Airbag

Structural Reinforce-ments

Control unit

High-voltage battery

High-voltage disconnection point

Gas generator

Gas filled spring device

Battery

High-voltage wire / components

Seat belt tensioner

Fuel tank Gasoline

High-Voltage component

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

VERSION:
Lincoln_Corsair_2027_v01

1. Identification / recognition

HYBRID VEHICLES MAY NOT HAVE ENGINE NOISE. LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF. SILENT MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN. WEAR APPROPRIATE PPE.



1. Vehicle Identification Number (VIN)
2. Blue Lincoln Badging (not available on all vehicles)

Vehicle Identification Number (VIN) Layout


The 8th position of the VIN identifies the vehicle's engine type as electric.

- Need to verify VIN information (Is it the same as 2026?)

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

Keys

Key Fob - The key fob can be used to access various vehicle systems. The key fob buttons should be used as shown below.

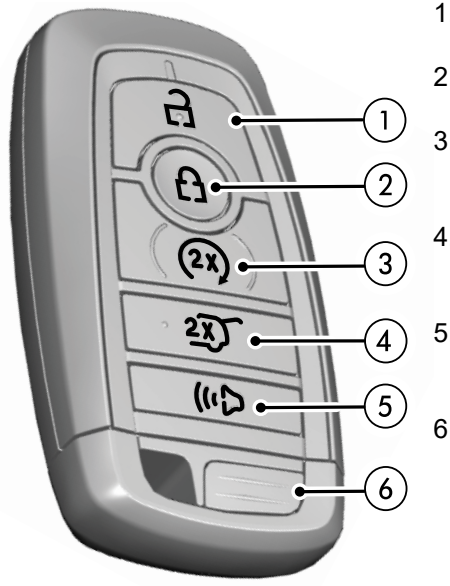


1. Unlock - Press the button to unlock all doors.
2. Lock - Press the button to lock all doors.
3. Remote Start - If equipped, press the button twice within three seconds to remote start.
4. Liftgate - Press the button twice within three seconds to open and close the liftgate.
5. Panic Alarm - If equipped, press the button to sound the panic alarm.
6. Key Blade - Push the release button on the passive key to remove the key blade.

Phone as a Key - Phone as a key allows use of a smart phone in place of a passive key. Bluetooth® connection must be enabled. A phone can be used for the following functions:

- Remote locking and unlocking
- Passive entry and exit
- Passive start and drive the vehicle
- Remote start
- Memory function recall

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

Instrument Cluster

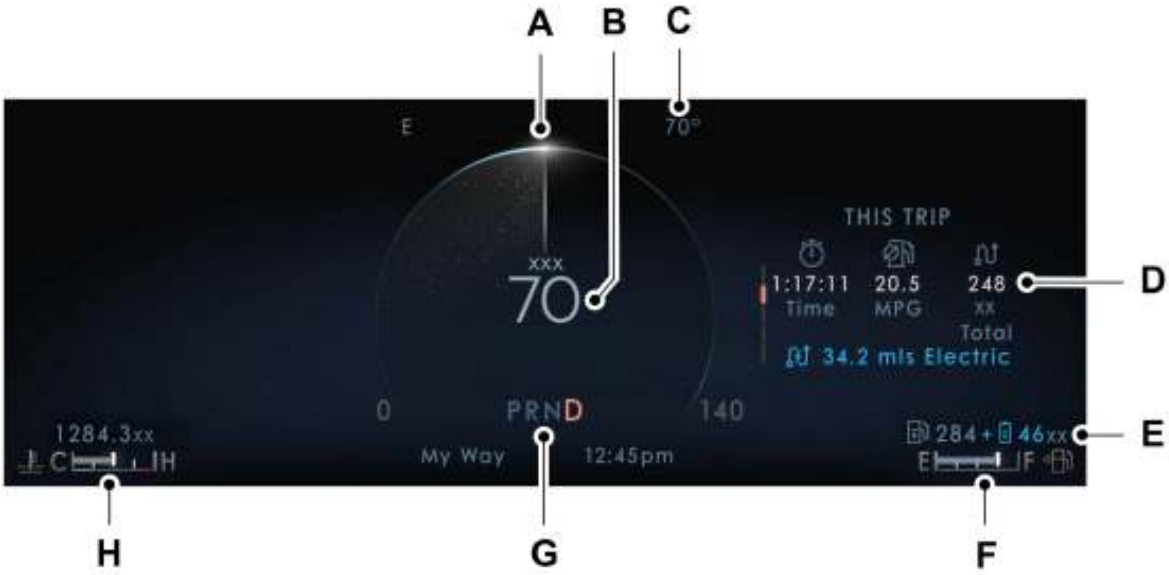

A - Status Bar

B - Speedometer

C - Outside air temperature

D - Right information group

E - Vehicle driving range

F - Fuel gauge

G - Automatic transmission position indicators

H - Engine coolant temperature gauge

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

2. Immobilization / stabilization / lifting


DO NOT JACK ON THE BATTERY CRADLE OR HV BATTERY TRAY. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN DAMAGE AND SERIOUS PERSONAL INJURY.

The High Voltage battery may not be used for lifting or stabilization. Damage to the battery pack may occur.

Service of the high voltage system on this vehicle is restricted to qualified personnel. The required qualifications vary by region. Always observe local laws and legislative directives regarding electric vehicle service. Failure to follow this instruction may result in serious personal injury or death.

Use caution to ensure you never come into contact with the high voltage battery or other high voltage components while lifting or manipulating the vehicle.

1. Position Wheel And Tire Chocks to prevent vehicle movement.

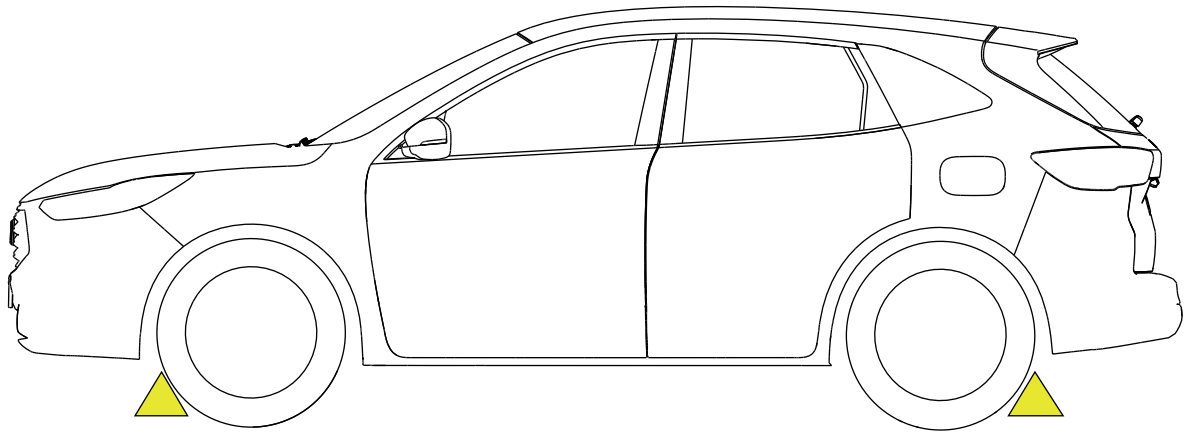

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

NOTICE: The electric parking brake does not operate if the vehicle battery has run out of charge.

NOTE: The red warning lamp flashes during operation and illuminates when the parking brake is applied.

NOTE: You can apply the electric parking brake when the power is off.

NOTE: The electric parking brake could apply when you shift into park (P).

2. Put vehicle into Park position (1), ensure that the vehicle ready light (2) is off.

3. Shut vehicle off with the push button. Remove the key or PAAK (Phone As A Key) from the vehicle to prevent vehicle from turning back on.


4. Approach vehicle from the side to avoid the potential travel path.



CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

STABILIZATION / LIFTING POINTS

Only the specified stabilization points may be used for jacking and supporting the vehicle.

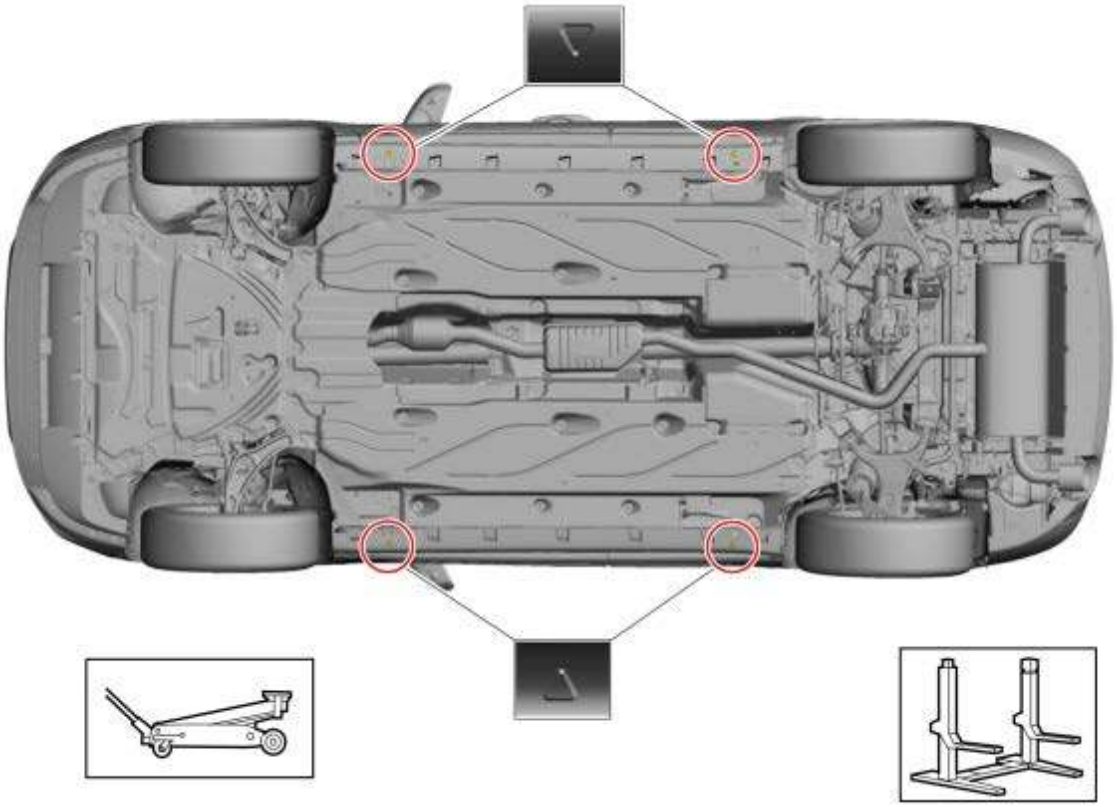

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

3. Disable direct hazards / safety regulations

To prevent the risk of high-voltage shock, always follow precisely all warnings and service instructions to depower the system. The high-voltage system utilizes high-voltage cables to its components and modules. The high-voltage cables and wiring are identified by orange harness tape or orange wire covering. All high-voltage components are marked with high-voltage warning labels with a high-voltage symbol. Failure to follow these instructions may result in serious personal injury or death.

DEPOWERING THE HIGH VOLTAGE SYSTEM DOES NOT DISSIPATE VOLTAGE INSIDE THE BATTERY, THE BATTERY PACK REMAINS LIVE AND DANGEROUS. CONTACT WITH THE HIGH VOLTAGE BATTERY PACK INTERNALS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

Make sure to use any low voltage item before cutting or disconnecting the 12-volt battery, ONLY if it is safe to do so and may aid in access to the victim(s). This includes, but is not limited to, emergency brake, power seats and windows.


HIGH VOLTAGE SYSTEM DISABLE PROCEDURE

IMPORTANT:

- Under urgent situations perform Option 1.
- Under non-urgent situations perform Option 2.

OPTION 1 - Under urgent situations ONLY


1. Open the hood and locate the Low Voltage Service Disconnect. Cut the wires adjacent to the Low Voltage Service Disconnect. Isolate the wires to prevent reconnection.

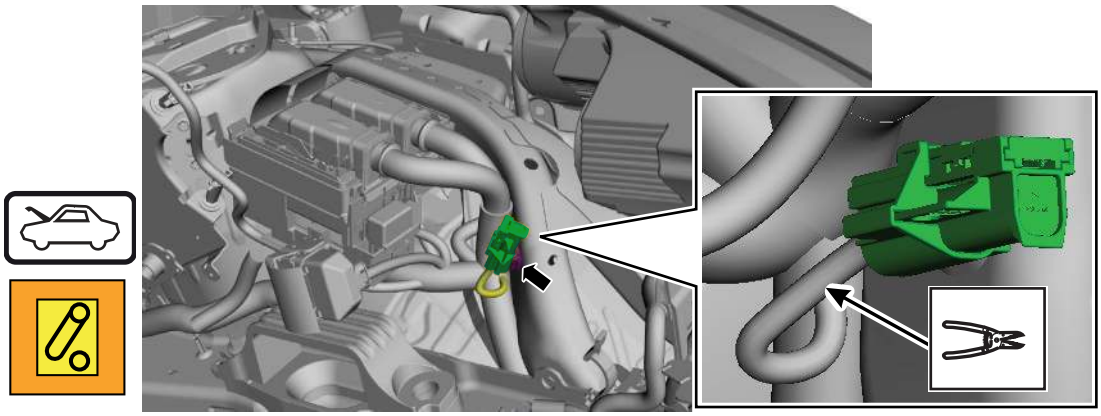


CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

12 Volt Battery Disconnect - Disables Safety Restraint System (SRS)


1. Remove the rear compartment cover.

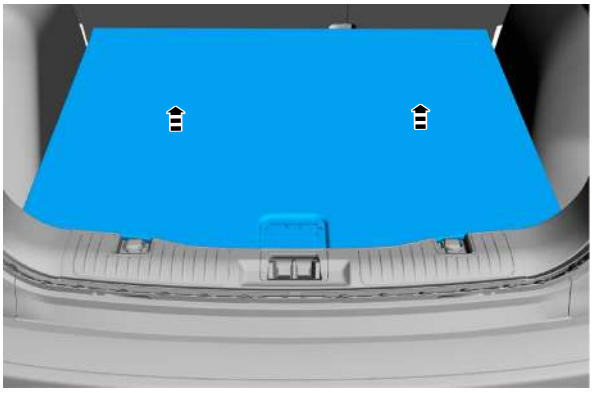

2. Remove the nuts and rear floor storage bin.

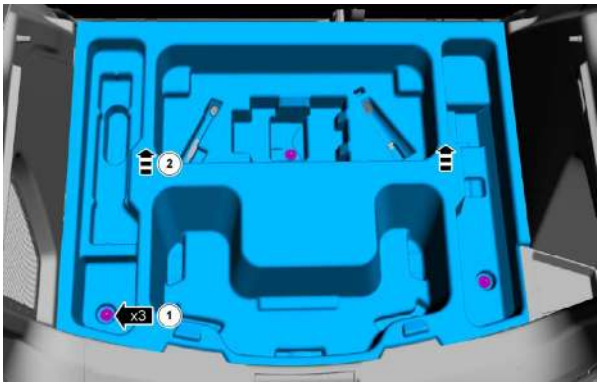

3. Locate and cut the negative battery cable to ground at two locations, 3 in. (7.6 cm) apart from each other. Isolate cable to prevent reconnection.

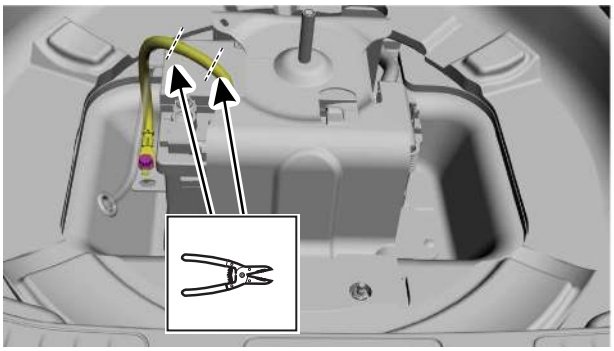

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

OPTION 2 - Under non-urgent situations

1. Put vehicle into Park position (1), ensure that the vehicle ready light (2) is off.


2. Shut vehicle off with the push button. Remove the key or PAAK (Phone As A Key) from the vehicle to prevent vehicle from turning back on.



Low Voltage Service Disconnect (Disables High Voltage System)


3. Open the hood.

4. Detach the pin-type retainer and position the electrical connector and wiring harness aside.

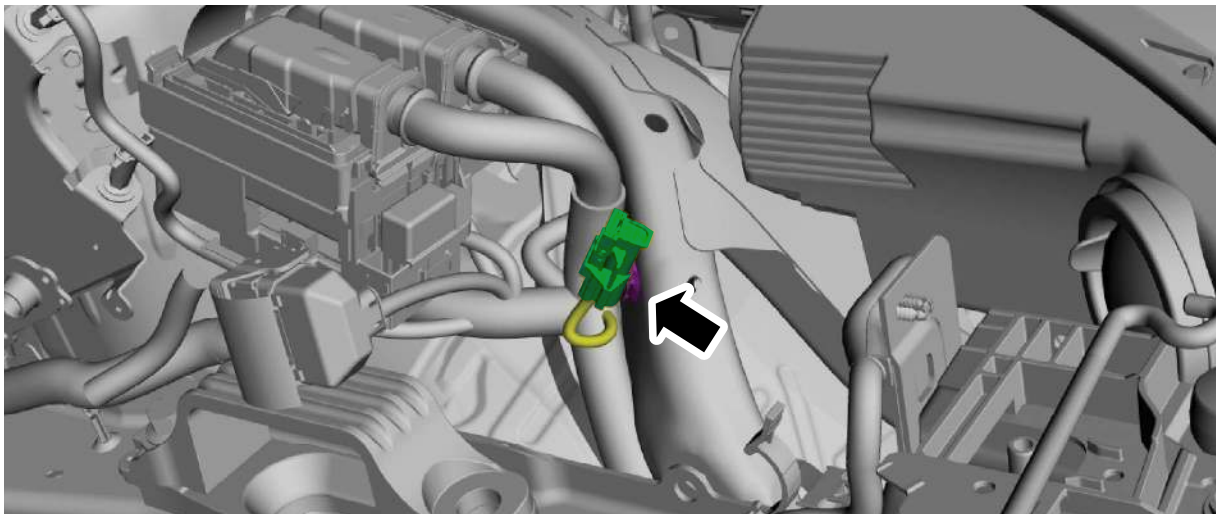


CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

5. Release the Connector Position Assurance (CPA) clip.

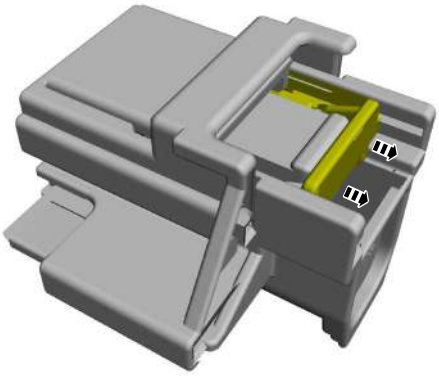

6. **NOTE:** The tab must be depressed prior to pushing the connector back in or damage to the connector may result.

Depress the tab while pulling the connector until the hole is completely visible on the top of the connector.

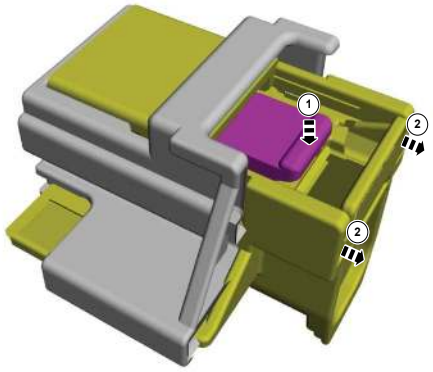

7. Insert a suitable tool inside the connector hole to prevent the connector from closing.




8. Wait a minimum of 5 minutes.


CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

12 Volt Battery Disconnect - Disables Safety Restraint System (SRS)


1. Remove the rear compartment cover.

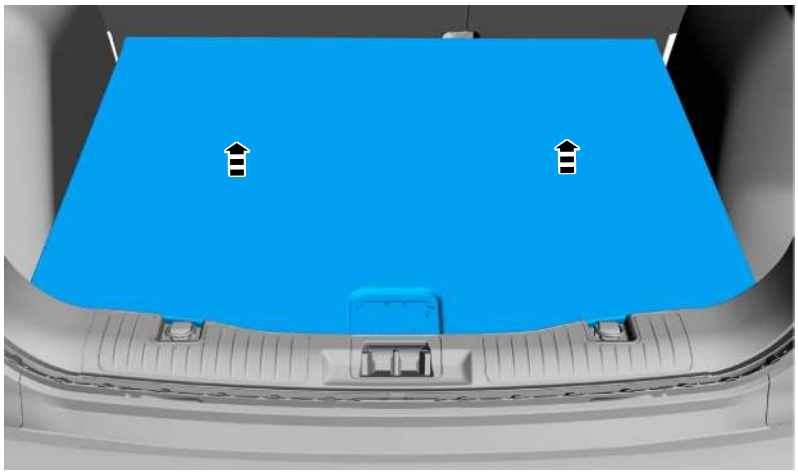

2. Remove the nuts and rear floor storage bin.

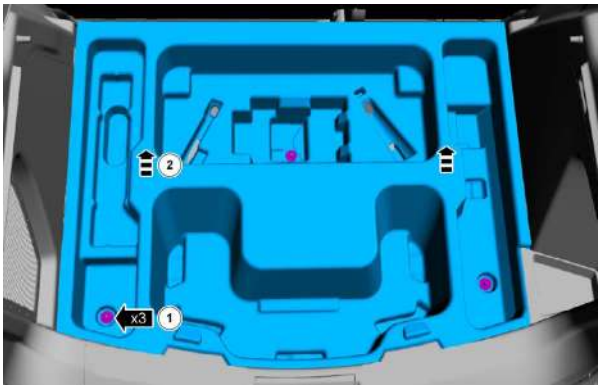


3. Remove the bolt and position the negative battery cable aside. Using electrical tape, cover the negative battery cable terminal.

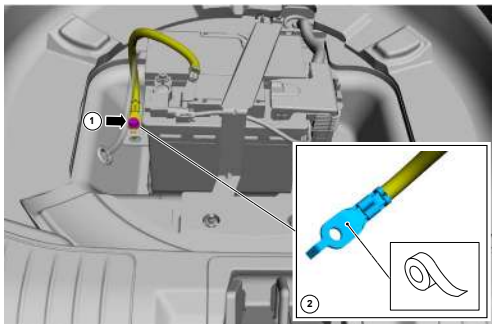


CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026


4. Remove the nuts and the spare tire hold-down bracket (if equipped).

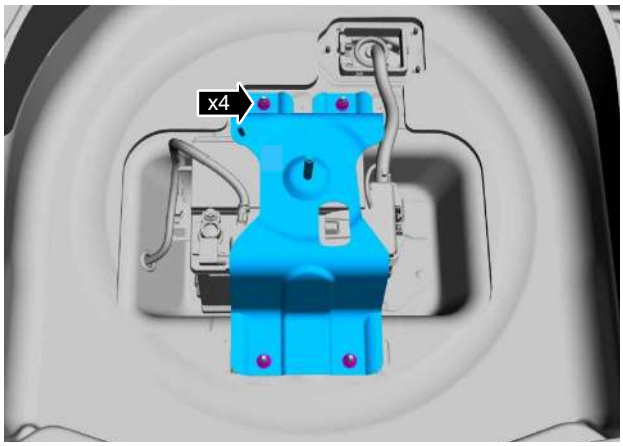

5. Disconnect the battery monitoring sensor electrical connector. Loosen, but do not remove the nut. Position the negative battery cable aside.

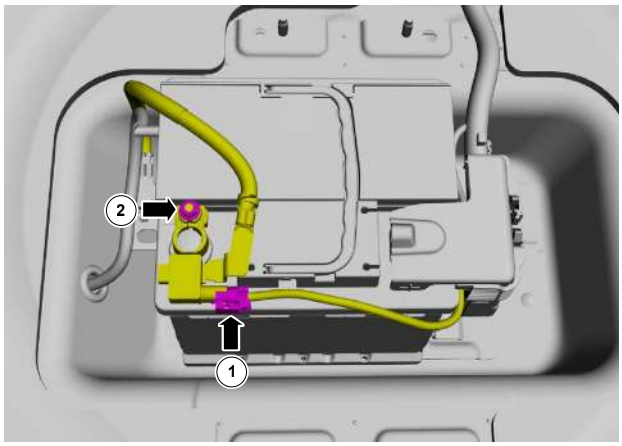

6. Position the positive battery cable battery terminal cover aside. Loosen, but do not remove the nut. Position the positive battery cable aside.

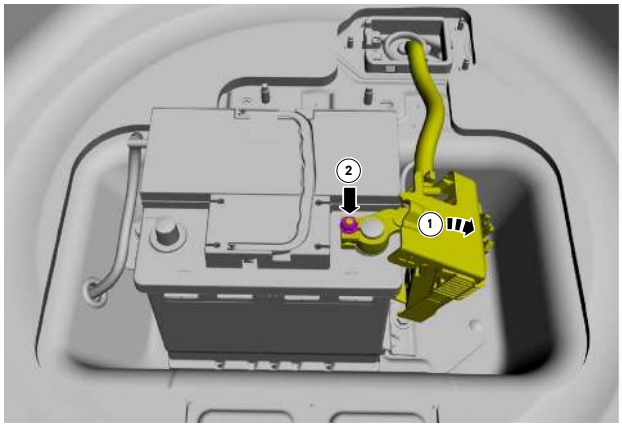

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

4. Access to the occupants

WARNINGS:

DEPOWERING THE HIGH VOLTAGE SYSTEM DOES NOT DISSIPATE VOLTAGE INSIDE THE HIGH VOLTAGE BATTERY PACK, WHICH REMAINS LIVE AND DANGEROUS. IT IS CRITICAL TO UNDERSTAND THAT HIGH VOLTAGE CAN ALSO REMAIN PRESENT IN OTHER HIGH VOLTAGE COMPONENTS THROUGHOUT THE VEHICLE. DIRECT CONTACT WITH THE HIGH VOLTAGE BATTERY PACK INTERNALS OR INTERNALS OF ANY OTHER HIGH VOLTAGE COMPONENT MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

HYBRID VEHICLES DAMAGED BY A CRASH MAY HAVE COMPROMISED HIGH VOLTAGE SAFETY SYSTEMS AND PRESENT A POTENTIAL HIGH VOLTAGE ELECTRICAL SHOCK HAZARD. REMOVE ALL METALLIC JEWELRY, INCLUDING WATCHES AND RINGS. ISOLATE THE HIGH VOLTAGE SYSTEM AS DIRECTED BY THIS DOCUMENT. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH. ALWAYS ASSUME THE VEHICLE'S HIGH VOLTAGE SYSTEM IS POWERED UP! Cutting, crushing, or touching High Voltage components can result in serious injury or death.

Never disassemble or tamper with seat belt deployable components, including pretensioners, load limiters and inflators. Tampering may cause an accidental deployment and result in personal injury or death.

Do not handle, move or change the original horizontal mounting position of the restraints control module (RCM) while the RCM is connected and the ignition switch is ON. Also, do not at any time, physically damage or impinge the RCM with a cutting or crushing operation while the 12-volt battery is connected. Failure to follow these instructions may result in the accidental deployment of the Safety Canopy or other undeployed inflatable restraints and cause serious personal injury or death.

Service and handling of Pyrotechnic Components is restricted to qualified personnel. The required qualifications vary by region. Always observe local laws and legislative directives regarding Pyrotechnic Components service and handling. Failure to follow this instruction may result in serious personal injury or death.

If occupant removal is necessary, always use caution when cutting near the vehicle High Voltage system components. Do not cut any of the High Voltage under vehicle or under hood cabling (all High Voltage cabling is orange). High voltage cabling runs underneath the vehicle, from the High Voltage battery under the left hand side of the vehicle to the underhood compartments. Refer to the diagram on page 19 for no cut zones.

NOTE: After a collision vehicle components may not function properly such as the steering wheel, power seats, and other electrical and mechanical components. If these components are not functioning properly and prevent access to occupants extraction may be required.


CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

Vehicle Body

The vehicle body is comprised of various strengths of aluminum.

High Strength Zones


The door beams as shown below are made of high strength steel.

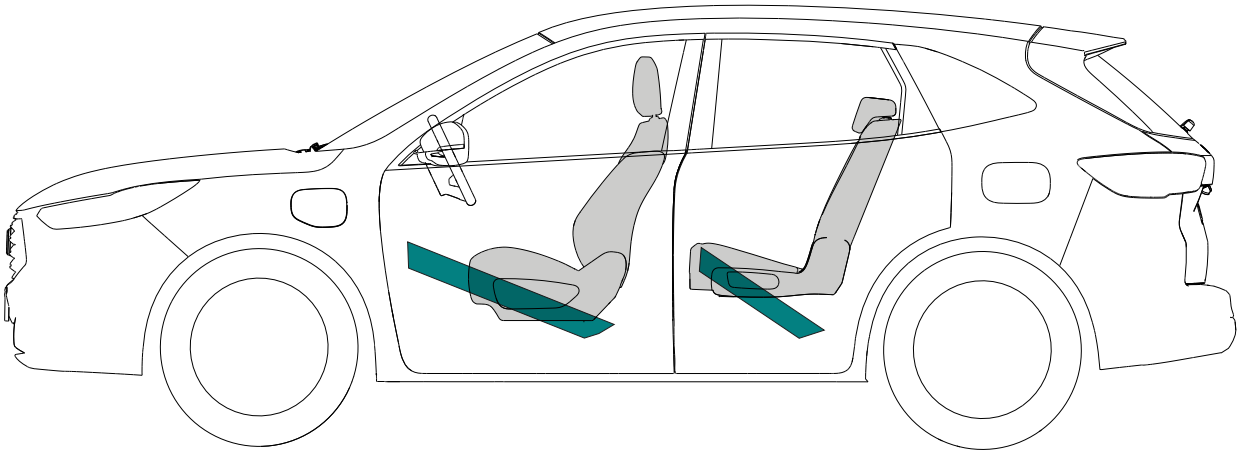

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

High Strength Zones (continued)

The B and C pillars, as well as the roof bow are made of stronger aluminum.

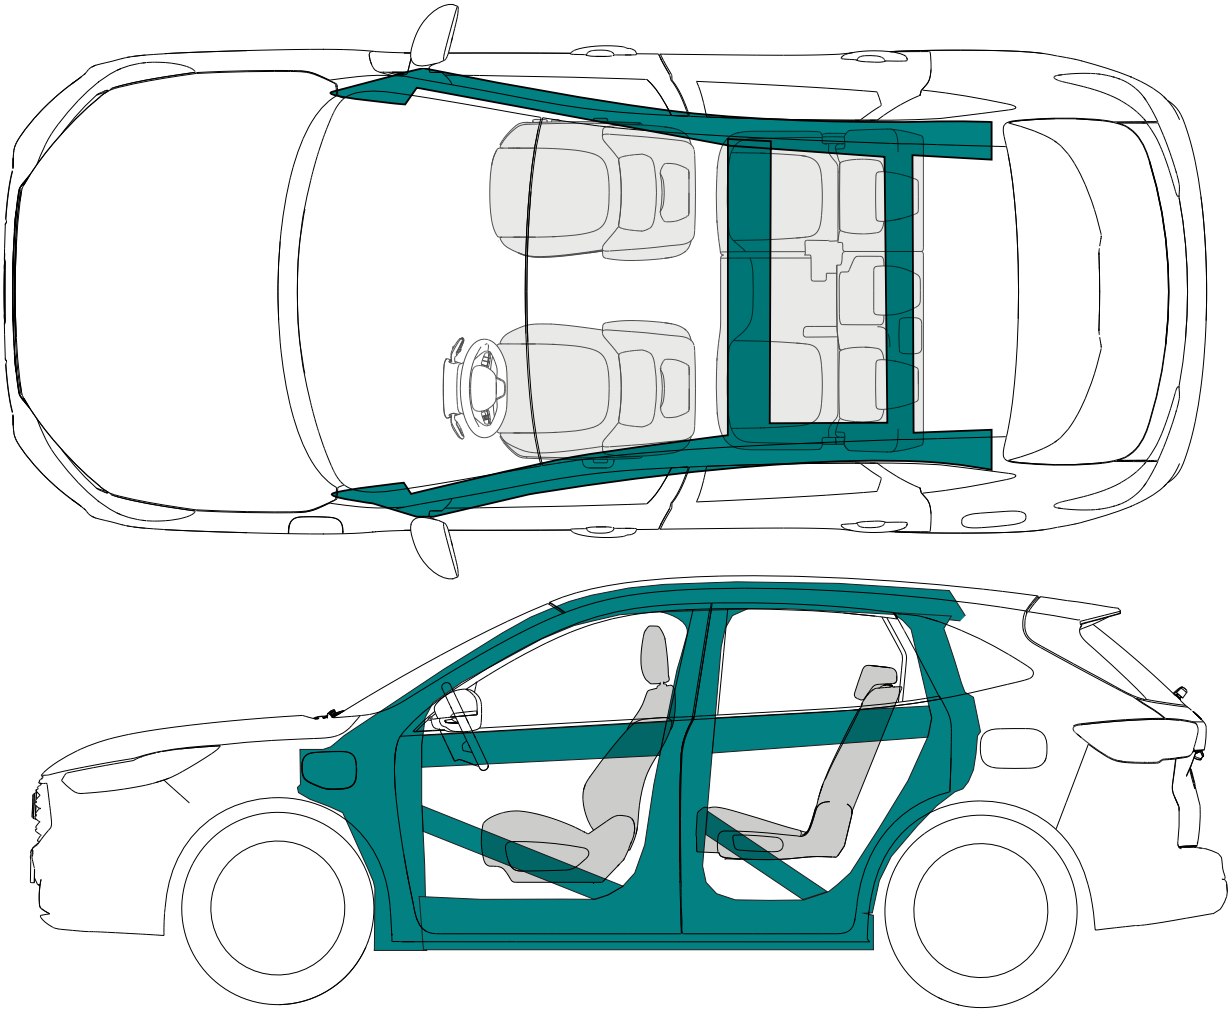

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

NO Cut Zones


WARNING:

HYBRID VEHICLES DAMAGED BY A CRASH MAY HAVE COMPROMISED HIGH VOLTAGE SAFETY SYSTEMS AND PRESENT A POTENTIAL HIGH VOLTAGE ELECTRICAL SHOCK HAZARD. REMOVE ALL METALLIC JEWELRY, INCLUDING WATCHES AND RINGS. ISOLATE THE HIGH VOLTAGE SYSTEM AS DIRECTED BY THIS DOCUMENT. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH. ALWAYS ASSUME THE VEHICLE'S HIGH VOLTAGE SYSTEM IS POWERED UP! Cutting, crushing, or touching High Voltage components can result in serious injury or death.

WARNING:

Always use appropriate tools, such as a hydraulic cutter, and always wear appropriate personal protective equipment (PPE) when cutting. Failure to follow these instructions can result in serious injury or death.

Due to the presence of High Voltage, pyrotechnic components and safety restraint components the identified areas should not be cut. Doing so could result in serious injury or death.

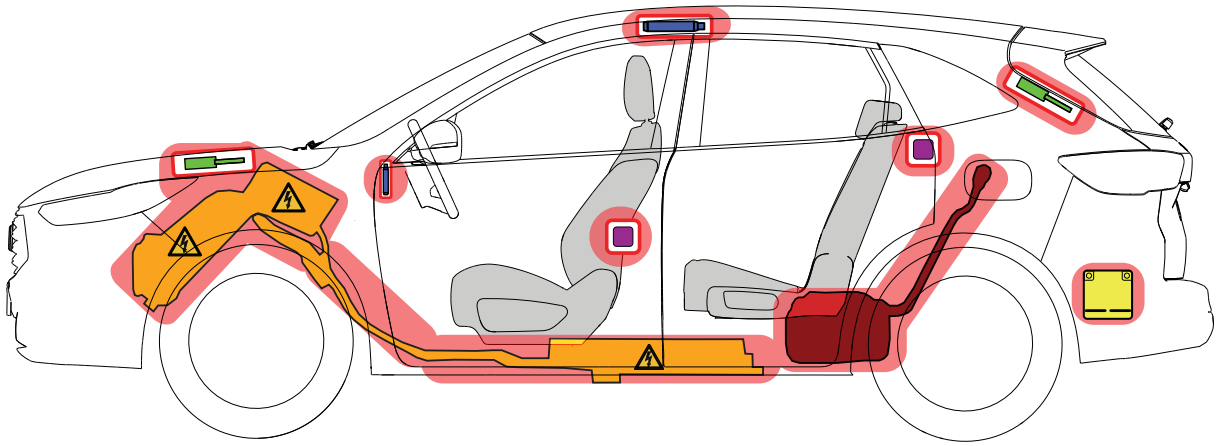


CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

Windows - Identification

The windshield and front windows are made of laminated safety glass (1). The rear windows and rear hatch window are made of tempered safety glass (2).

(1) Laminated Safety Glass
(2) Tempered Safety Glass

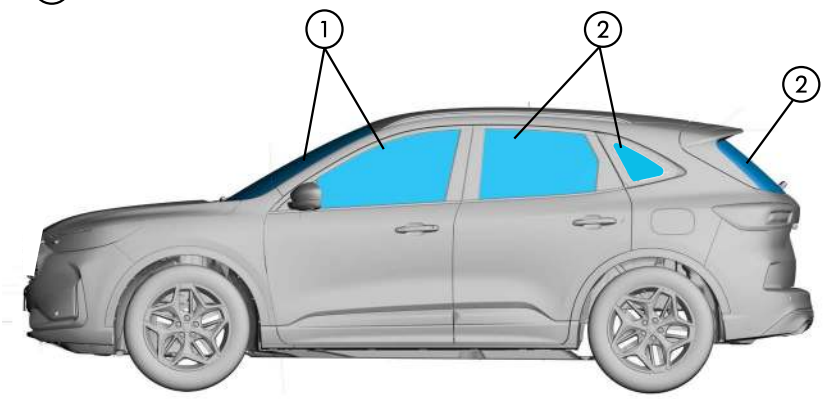


Doors and Door Handles

To operate the front doors from inside the vehicle:
Pull the interior door handle.

To operate the rear doors from inside the vehicle with the doors LOCKED:
Pull the interior door handle twice to unlock and open the door. The first pull unlocks the door and the second pull opens the door.


To operate the rear doors from inside the vehicle with the doors UNLOCKED:
Pull the interior door handle one time to open the door.

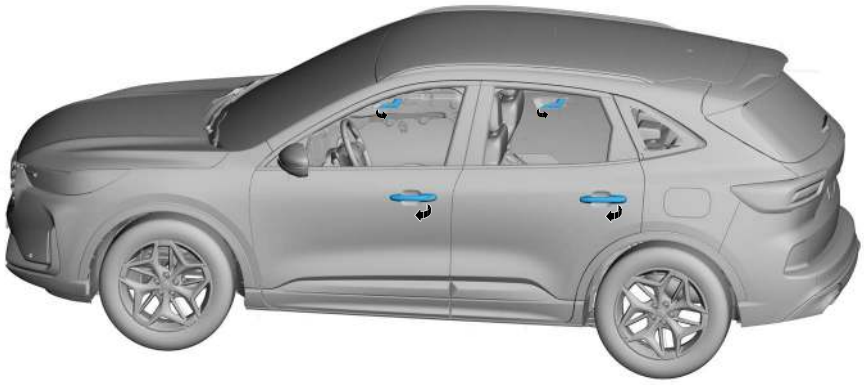

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

Driver's Seat Adjustments

See the image below for adjusting the seat backward and forward as well as the seat height.

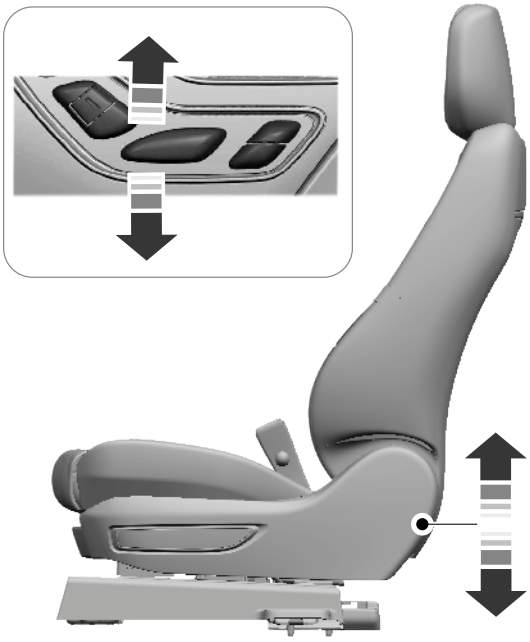



CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026


Steering Wheel Adjustments


Adjusting the steering wheel with a manual adjustable steering column:

1. Unlock the steering column.

2. Adjust the steering wheel as needed.

3. Lock the steering column.

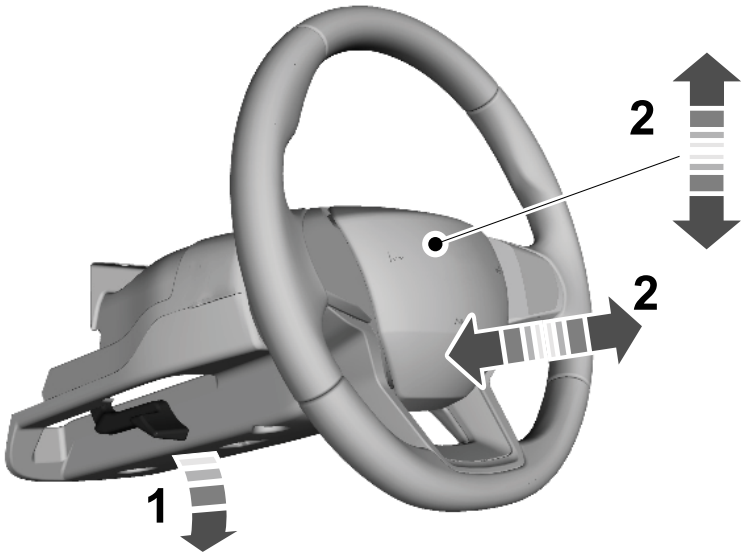

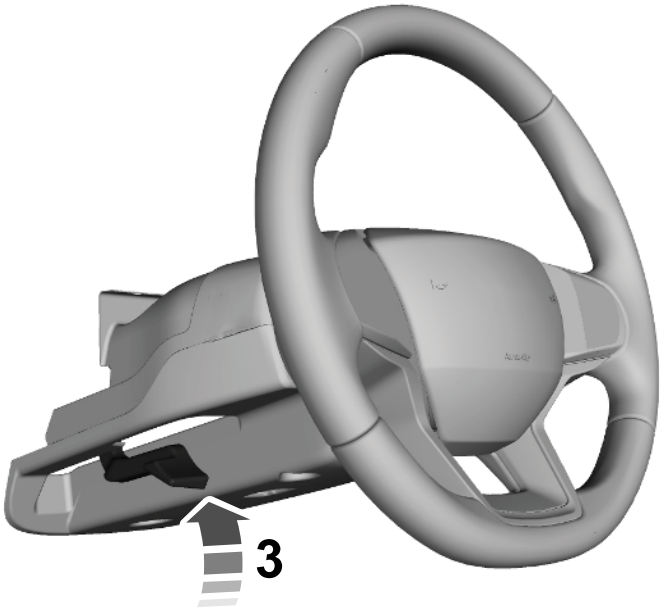

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

Steering Wheel Adjustments

Press the top or bottom of the control to move the steering wheel up or down.

Press the front or rear of the control to move the steering wheel in our out.




CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

Occupant Restraint Systems

Airbags

The airbags are approximately located in the areas shown. Airbag information can be found on the sun visors as well.

When the RCM has deployed the safety restraint system component(s), the high-voltage system may be deactivated.

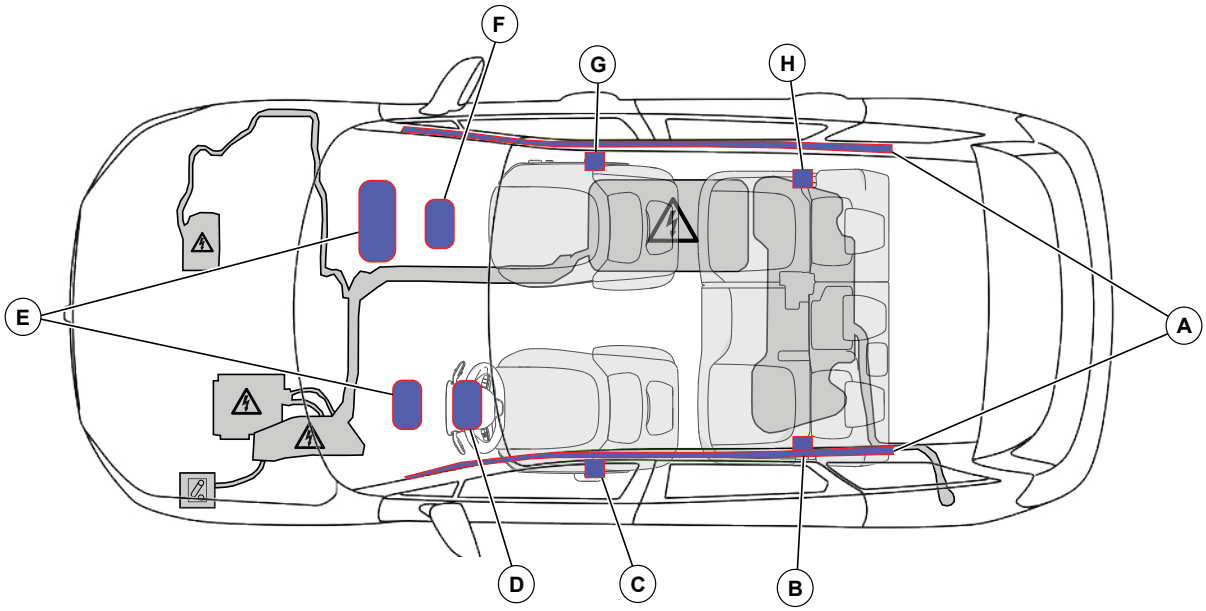


A - Driver and passenger side curtain airbag
B - Driver second row seat side airbag
C - Driver side airbag
D - Driver airbag
E - Driver and passenger knee airbag
F - Passenger airbag
G - Passenger side airbag
H - Passenger second row seat side airbag

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026


Stored Gas Inflators

The stored gas inflators are located in the B-pillar on the driver and passenger side as well as with the driver and passenger airbags.

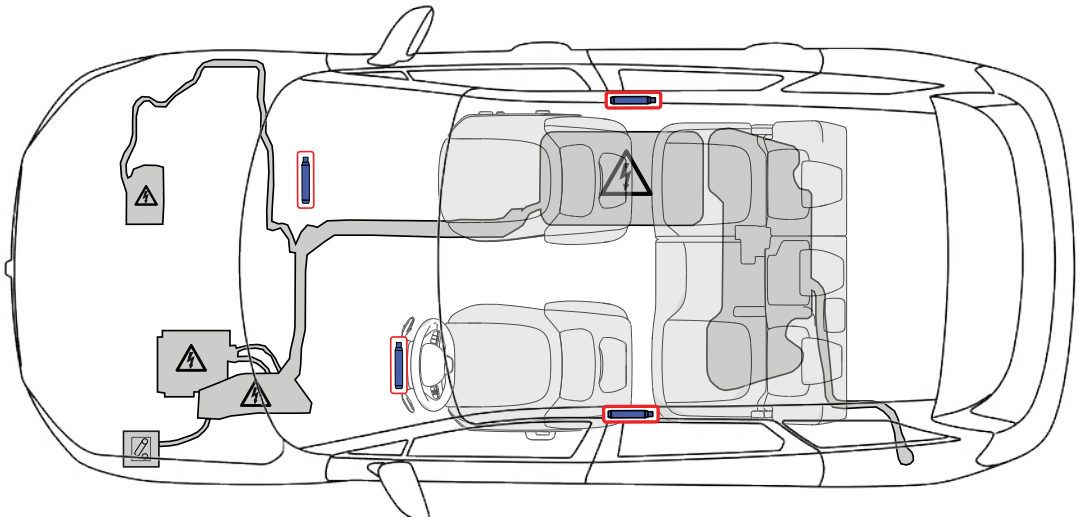

Seatbelt Pretensioners

The seatbelt pretensioners are part of the restraint system and located in the seat belt retractor assembly.

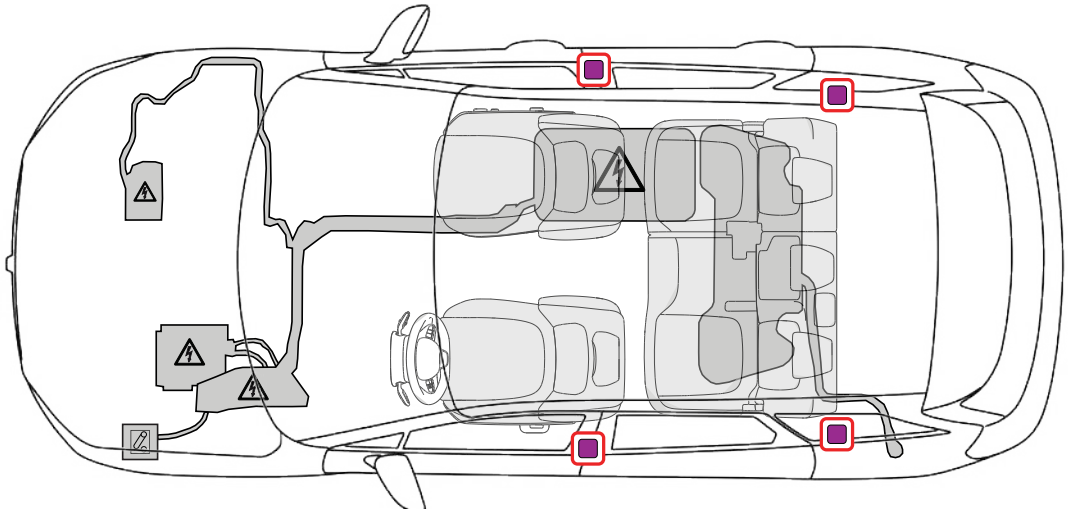

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

5. Stored energy / liquids / gases / solids



12 V



300 V

Refer to the vehicle overview illustration on Page 3, for location reference of the high voltage battery, 12-volt battery, and other vehicle component locations.

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

6. In case of fire



LITHIUM-ION BATTERIES CAN IGNITE SPONTANEOUSLY OR RE-IGNITE AFTER THE FIRE HAS BEEN EXTINGUISHED.
WEAR APPROPRIATE PPE.



Follow Existing Training and Incident Commander Direction

WARNINGS:

HYBRID VEHICLES WITH DAMAGED HIGH VOLTAGE BATTERIES REQUIRE SPECIAL HANDLING PRECAUTIONS. INSPECT THE VEHICLE CAREFULLY FOR LEAKING BATTERY FLUIDS, SPARKS, FLAMES, AND GURGLING OR BUBBLING SOUNDS. FAILURE TO FOLLOW THESE INSTRUCTIONS MAY RESULT IN A VEHICLE FIRE AND PERSONAL INJURY OR DEATH.

FIRES IN CRASH-DAMAGED HYBRID VEHICLES MAY EMIT TOXIC OR COMBUSTIBLE GASSES. SMALL AMOUNTS OF EYE, SKIN OR LUNG IRRITANTS MAY BE PRESENT. WEAR PERSONAL PROTECTIVE EQUIPMENT (PPE) AND SELF-CONTAINED BREATHING APPARATUS WHEN WORKING IN CLOSE PROXIMITY OR IN A CONFINED AREA, SUCH AS A TUNNEL OR GARAGE. VENTILATE THE VEHICLE INTERIOR BY OPENING VEHICLE WINDOWS OR DOORS. VENTILATE THE WORKING AREA. FAILURE TO FOLLOW THIS INSTRUCTION MAY RESULT IN SERIOUS PERSONAL INJURY OR DEATH.

DO NOT ATTEMPT TO DISCHARGE THE HV BATTERY.

White/light gray smoke from a HV battery contains chemicals which can be:

- **Combustible where the smoke is exiting the battery vent location**
- **Explosive in a confined space environment (such as a small garage) with the correct mixture of air**
- **Toxic in short exposure durations**

Forcing water into a HV battery which is NOT directly involved in a fire, or experiencing thermal runaway, may cause electrical shorting, electrical arcing, and initiate thermal runaway and fire within the battery.

HV battery thermal runaway events are VERY hot internally (>200°C/392°F) and may remain hot for hours or DAYS if left uninterrupted, possibly leading to:

- **Continued thermal propagation and intensity increase.**
- **Active fire outside of the HV battery.**

HV battery fire and thermal runaway often occur together. Both fire and temperature of the HV battery must be brought under control. If only the fire is extinguished but high temperatures persist, then thermal runaway may continue, and fire may resume.

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

The below sub-sections outline precautions and actions required in the event of a HV battery fire or thermal event.

1. Assess the Situation - Is the HV battery in a fire or experiencing thermal runaway?

When arriving on the scene of an electrified vehicle incident, first determine whether any observed fire or thermal runaway involves the HV battery via the following guidance:

Assessment of Flames -

If flames are coming from the bottom of the vehicle and/or the sides of the vehicle below the doors:
Then the HV battery IS likely involved.

If flames are not coming from the HV battery location, but are coming from the wheel wells:
Then the HV battery MAY BE involved. Seek additional information (assessment of smoke, sounds and temperatures).

If flames are not coming from the HV Battery location or wheel wells, but are coming from other such areas as the occupant compartment interior:
The HV battery is NOT likely involved.

Assessment of Smoke -

If there is jetting smoke lasting more than a few seconds and it is coming from the battery vicinity:
Then the HV Battery IS likely experiencing thermal runaway.

If substantial white/light gray smoke is seen:
Then the HV Battery IS likely experiencing thermal runaway.

If substantial dark gray/black smoke is seen:
Then the HV Battery MAY BE experiencing thermal runaway. Seek additional information (Assessment of sounds and temperature).

Assessment of Sounds -

If you hear several repetitive explosive, popping, percussive type sounds (possibly intermittent) then the HV Battery is likely experiencing thermal runaway.

NOTE: Other components with compressed gas or pyrotechnics such as gas struts and airbags may produce singular explosive sounds but will not cause several repetitive sounds.

Assessment of Temperatures -

If the HV Battery surface temperatures (or materials immediately covering the HV Battery) exceed 149°C (300°F) and there is not an external heat source near the HV Battery causing this then the HV Battery IS likely experiencing thermal runaway.

WARNING: A HV Battery with surface temperatures above 71°C (160°F) may remain at risk of resuming thermal runaway and a fire event.

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

NOTES:

- Thermal imaging cameras with target temperature measurement capability are well suited for surface temperature measurements from a distance with acceptable accuracy.
- Measurements of multiple surface locations are recommended to determine a HV battery is not at thermal risk to resume thermal runaway or fire.
- Use of a pole mounted thermal camera or tilting the vehicle may enable better measurements of the HV battery.

Assessment of the HV battery -

If the HV Battery IS likely involved in a fire or experiencing thermal runaway proceed to sub-section 2.

If the HV Battery MAY BE involved in a fire or experiencing thermal runaway then address the incident according to standard procedures, while continuing to monitor for indications of a HV Battery fire or thermal runaway.

If the HV Battery IS NOT likely involved in a fire or experiencing thermal runaway, then address the incident according to standard procedures.

2. Contain any active HV battery Fire and Thermal Runaway - ONLY if the HV battery is likely involved

NOTES:

- HV batteries may be difficult to apply water to and cool and require several times more water than a conventional vehicle fire. Consider additional resources to establish a continuous, sustainable water supply.
- Thermal imaging cameras with target temperature measurement capability are well suited for surface temperature measurements from a distance with acceptable accuracy.
- Always use appropriate Firefighting Personal Protection Equipment (PPE) and/or Self-Contained Breathing Apparatus (SCBA) for protection from flames and toxic chemicals.

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

Once the HV Battery has been assessed as involved in fire or thermal runaway, the Officer In Command (OIC) should determine one of two strategies to address the situation.

1. Engage the HV Battery to extinguish any flames and cool all accessible surfaces

a. Apply water onto the HV Battery
   i. Direct application of water is best
   ii. Tilting the vehicle may improve HV Battery access to apply water. Follow the precautions in Section 2 for Stabilization and Lifting Points.
b. Continue to apply water for several minutes after any visible flames have been extinguished and the HV Battery surface has cooled below 66°C (150°F).
c. Monitor HV battery case temperature with a thermal imager and alternate with water cooling if the temperature rebounds to above 66°C (150°F) in 20-minute intervals.
d. Ventilate the vehicle interior: Open/remove doors, open/remove windows.

2. Allow the battery to burn itself out

a. Alternatively, the incident may be quarantined and left to consume the battery rather than attempting to actively fight the fire.
   i. This determination should be made by the OIC considering possible life, property, infrastructure and environmental exposures from heat OR byproducts of combustion.
   ii. Water supply and application may still be necessary to protect exposures such as property or infrastructure.
   iii. This method can reduce the possibility of a repeat incident with the same vehicle.


CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

7. In case of submersion

WARNING:
DAMAGED ELECTRIC VEHICLES SUBMERGED IN WATER PRESENT A POTENTIAL HIGH VOLTAGE ELECTRICAL SHOCK HAZARD. EXERCISE CAUTION AND WEAR APPROPRIATE PERSONAL PROTECTIVE EQUIPMENT (PPE).

Ford vehicles do not have high voltage (HV) components electrically connected to the vehicle's body or frame. It is safe to touch the vehicle's body or frame for purposes of accessing the passenger compartment in a rescue situation.

DO NOT TOUCH HV COMPONENTS OR HV CABLING (ORANGE).

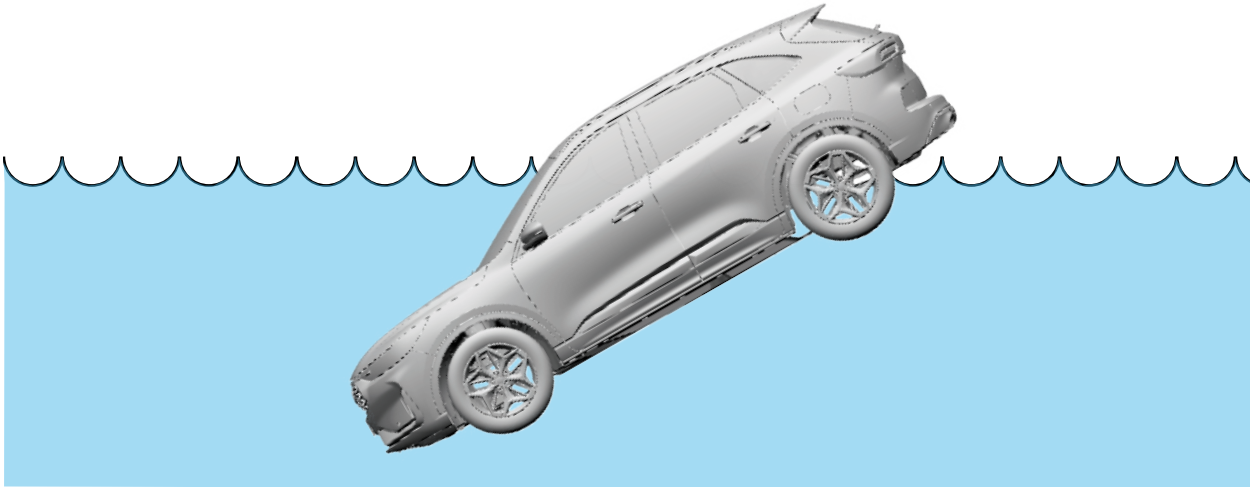

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

1. Observe

- A submerged HV battery may produce a fizzing or bubbling reaction to the water.
- Always assume that the HV Battery has HV energy, even after the fizzing or bubbling has stopped.
- Responders should take appropriate precautions to avoid contact with exposed conductors. DO NOT touch components inside the battery housing.

2. Prepare for vehicle removal from water only after Officer in Command (OIC)/Electric Vehicle (EV) specialist confirmation

A. Rigging and extraction precautions (once removal is authorized)
   i. Prefer non-conductive lifting/attachment methods (polyester straps, nylon slings) routed to attachment points identified in the Wrecker Towing Manual (Select Model Year and Model at this link: https://www.motorcraftservice.com/ServiceTip?category=TnL
      If metal rigging is used, ensure it does not contact HV components.
   ii. Do not pass straps, chains, or hooks directly over or under HV battery packs of HV components or HV cabling (orange).
   iii. Ensure vehicle body or frame members used for rigging are structurally sound and not compromised by impact, corrosion, or other damage.

B. First Responder Precautions
   i. Refer to Section 6 "In case of fire" subsection 1. Assess the Situation - Is the HV battery in a fire or experiencing thermal runaway?" to determine if the vehicle is experiencing thermal runaway. If thermal runaway is present or if you observe the vehicle bubbling under water, do not proceed to remove the vehicle until any reaction has settled.

3. Remove the Vehicle from the water

- Follow the OIC guidance in extracting the vehicle from the water.
- Keep clear of the vehicle when possible.
- Use a Thermal Imaging camera to check and not the temperature of the HV battery.
- Wait 20 minutes and check with a Thermal Imaging camera again for increasing temperature of the HV Battery. If a temperature rise of ~3°C (5°F) or more is observed, refer to Section 6 "In case of fire" for other signs of thermal runaway and how to proceed.

4. Disable HV

- Refer to Section 3 "Disable Direct Hazards / Safety Regulations" to disable the HV.

5. Drain the water from the vehicle

- It water remains in the vehicle after extraction from the water, open the doors and, if possible, tilt the vehicle to try to remove the remaining water.
  - Alternatively, remove carpet and pull out drain plug.

6. Assess for Electrical Hazards

- Damaged HV components with exposed internal conductors are hazardous to touch. Responders should take appropriate precautions to inspect for and avoid contact with exposed conductors. DO NOT touch components inside the battery housing.

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

7. Inspect for Fire Potential Hazards

- See Section 6 "In Case of Fire" subsection 1, Assess the Situation - is the HV battery in a fire or experiencing thermal runaway.

8. Notify the Tow Operator and storage personnel that the vehicle has been submerged so that they can take proper precautions.

- See Section 8 "Towing/transportation/storage"
- Advise the Tow Operator that the vehicle was submerged and there is a greater risk of subsequent thermal runaway.
- The vehicle should not be stored inside a structure of within 50 ft (15m) of any structure or vehicle.


CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

8. Towing / transportation / storage

LITHIUM-ION BATTERIES CAN IGNITE SPONTANEOUSLY OR RE-IGNITE AFTER THE FIRE HAS BEEN EXTINGUISHED.
WEAR APPROPRIATE PPE.

IR

If the vehicle has been involved in an accident or if the HV battery is damaged or unstable:
Deactivate the high-voltage system (See Section 3).
Do not store a severely damaged vehicle inside a structure or within 50 ft (15m) of any structure or vehicle.



Moving Damaged Vehicles - Tow Truck Drivers

IMPORTANT! Be alert. There is a potential for delayed fire with damaged lithium-ion batteries.

NOTICE: Do not attempt to pull / tow vehicle with wheels on the ground as this may cause the vehicle to generate electricity and can cause potential damage.

Confirm that the HV System is disabled. Refer to Section 3 Disable Direct Hazards/Safety Regulations.

Follow the guidelines in the Wrecker Towing Guide

WARNING: DO NOT contact or apply loads to HV components. HV components on the vehicle are identified on Page 3.

In the event of damage to or fire involving an electric vehicle:

- Always assume the High Voltage battery and associated components are energized and fully charged.
- Exposed electrical components, wires, and High Voltage batteries present potential HV shock hazards.
- Venting/off-gassing High Voltage battery vapors are potentially toxic and flammable.
- Physical damage to the vehicle or High Voltage battery may result in immediate or delayed release of toxic and/or flammable gases and fire.

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

Notes for Transport Personnel:

- If you detect leaking fluids, sparks, smoke, flames, increased temperature, gurgling, popping or hissing noises from the High Voltage Battery compartment, call 911.
- The HV components equipped on this vehicle include protective designs and packaging to substantially reduce the risk of an electrical shock hazard. This remains true even if water is present on or near the vehicle and ground.
- Place vehicle into park (P), set the parking brake, turn off the vehicle, activate hazard lights, and remove the keys to a distance of at least 5m (16 ft) from the vehicle until loading.
- Prior to transporting a vehicle with a HV battery that has been involved in a fire, ensure that the vehicle interior has been ventilated by opening or removing doors and/or windows.
- Assess the vehicle structure (sheet metal body, chassis, driveline) to ensure it is safe and structurally capable of receiving rigging. Only use safe, capable structures for securing the vehicle. Do not place load on HV components.
- Rigging must not contact or apply force to HV components. Avoid winching or placing straps over or near HV components. Use non-conductive materials as needed.
- Refer to the vehicle owner manual or recovery guide to locate proper attachment and connection points and recommended transport methods.

1. Vehicle preparation for transport:

Drain residual water from the battery

If the vehicle is tilted at the conclusion of the fire containment activities, allow the vehicle to rest approximately level on the ground until the following two conditions are met:

5 minutes time on level ground have passed
Water is dripping from the battery bottom at no more than 1 drop per second


Once the water has drained on level ground, the towing personnel should prepare to winch the vehicle onto the truck/trolley.

Begin winching the vehicle onto the truck/trolly, but stop when the vehicle is near the steepest slope it will achieve. See the Figure below.

Allow the vehicle to drain until the following two conditions are met:

5 minutes time while inclined have passed
Water is dripping from the battery bottom at no more than 1 drop per second

Complete the winching activity and secure the vehicle to the tow truck.

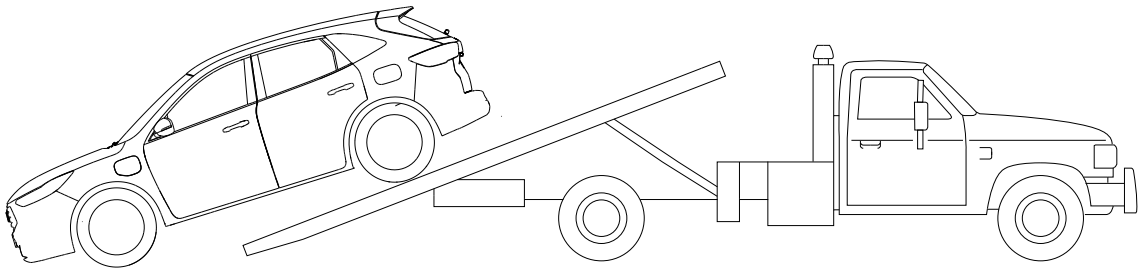

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

2. Vehicle transport:

Select a drive route for towing the vehicle from the incident scene to the location that meets the following criteria in the order presented:

Avoid high traffic density
Avoid the use of highway tunnels
Reduce the degree of steep roads during transportation
Reduce the transportation distance

Drive with gentle accelerations, decelerations and turns.

Vehicle Storage

Contact an authorized Ford or Lincoln Dealer as soon as possible as there may be additional steps necessary to secure, handle, and/or store the High Voltage battery and vehicle.

Do not store a severely damaged vehicle with a lithium-ion battery inside a structure, any enclosed container or within 15 m (50 ft) of any structure or vehicle.

Make sure the passenger and cargo compartments remain ventilated.

Prior to placing vehicle in storage, and while located in storage area/tow lot, continue to inspect vehicle for leaking fluids, sparks, smoke, flames, gurgling or bubbling sounds from the High Voltage battery and call 911 if any of these are detected.


Maintain clear access to stored vehicles for monitoring and emergency response if needed.

Do not place load on HV components. DO NOT ATTEMPT TO DISCHARGE THE HV BATTERY.

Securing straps must not contact or apply force to HV components. Avoid winching or placing straps over or near HV components. Use non-conductive materials as needed.

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

If the vehicle and/or battery High Voltage system is damaged, place a sign indicating that it is a battery electric vehicle with potentially dangerous High Voltage. See example below:

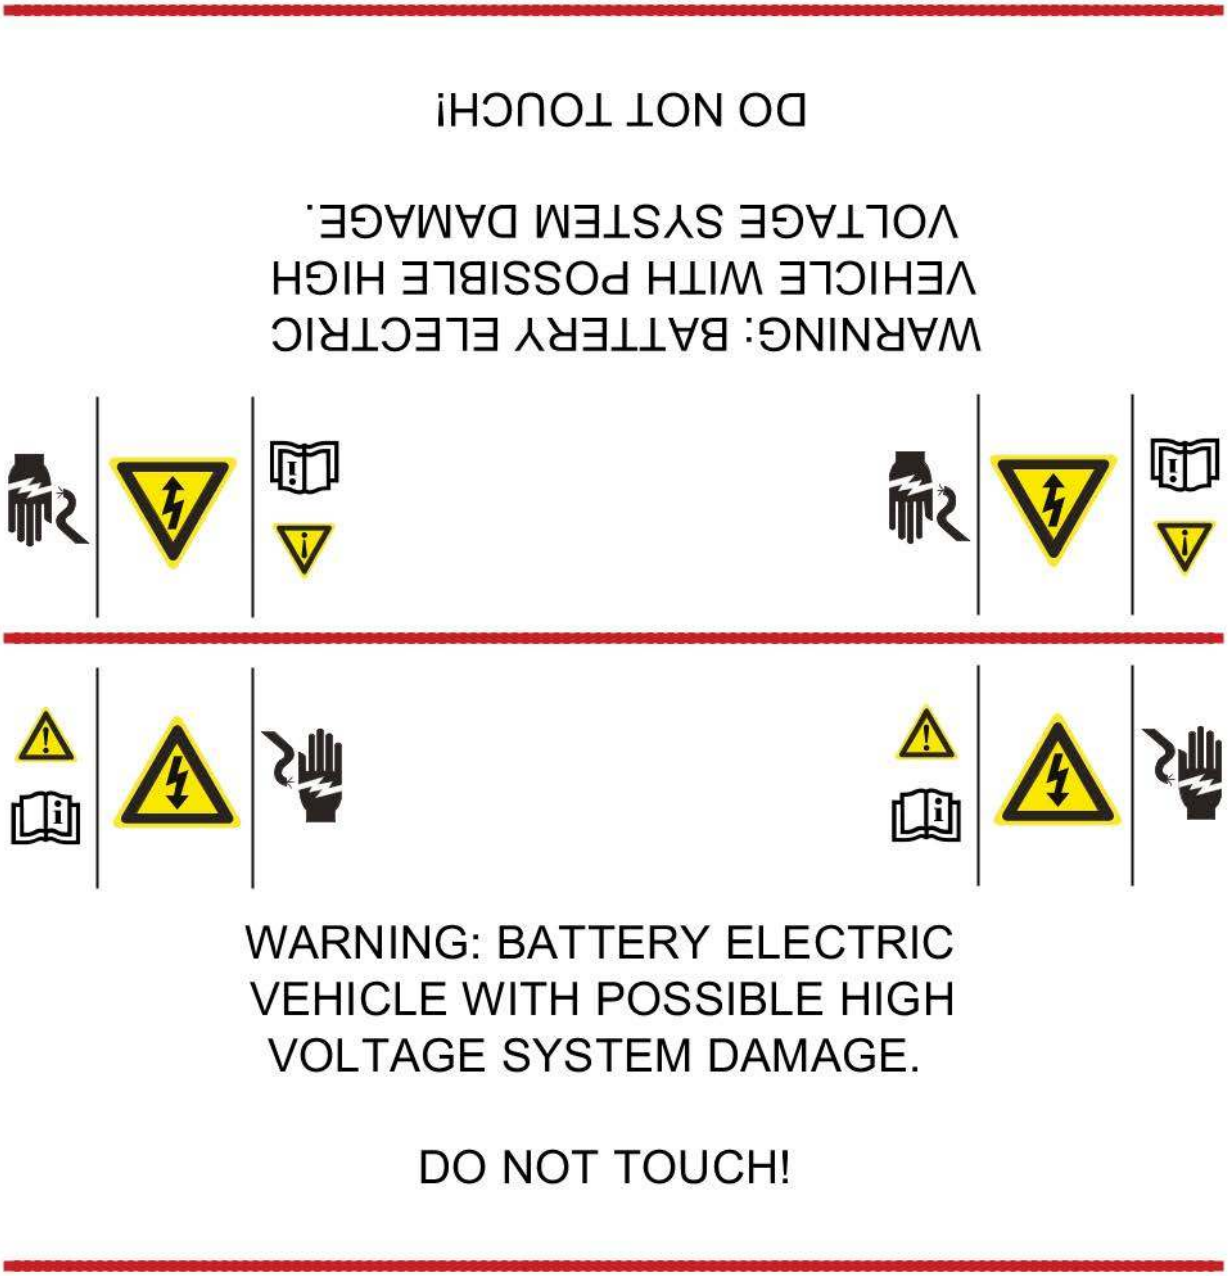

CPR © 2026 FORD MOTOR COMPANY
DEARBORN, MICHIGAN 48121
08/2026

9. Important additional information

HV Battery transport:

DDR (Damaged, Defective, Recalled) HV batteries must satisfy special shipping regulations per Department of Transportation (DOT) and Transportation of Dangerous Goods (TDG) in the US and Canada markets.
DDR HV batteries must be transported in metal containers which have been certified for that purpose.


HV Battery storage:

DDR HV batteries should be shipped to recyclers for disposal as soon as possible. Consult with relevant authorities and fire safety experts to ensure compliance with regulations and the effectiveness of any fire suppression systems in place when HV batteries will be stored for a significant amount of time.

For First Responder Resources, refer to https://www.ford.com/firstresponder/

© Copyright 2026, Ford Motor Company. All rights reserved. This document may be reproduced in its entirety and distributed for emergency responder use only. It may not be excerpted for any purpose.

10. Explanation of pictograms used

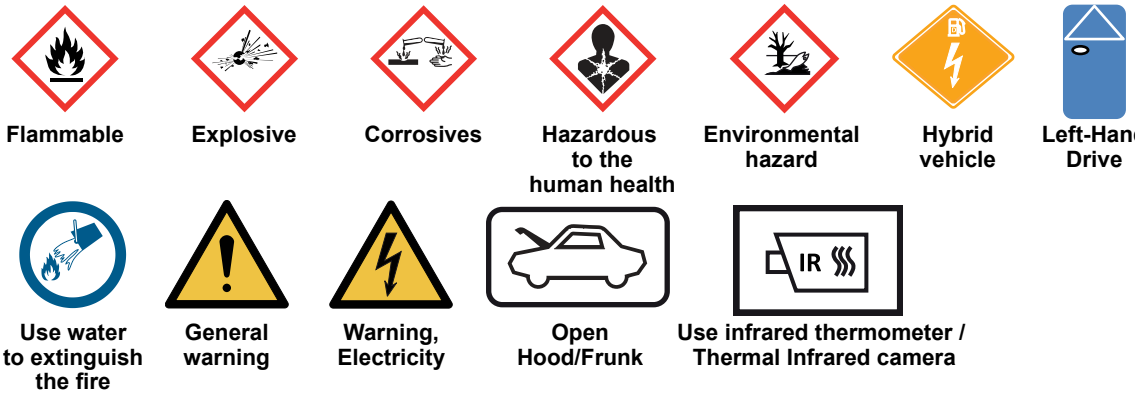

Flammable | **Explosive** | **Corrosives** | **Hazardous to the human health** | **Environmental hazard** | **Hybrid vehicle** | **Left-Hand Drive**

Use water to extinguish the fire | **General warning** | **Warning, Electricity** | **Open Hood/Frunk** | **Use infrared thermometer / Thermal Infrared camera**