




HYUNDAI XCIENT FUEL CELL TRUCK (2023)

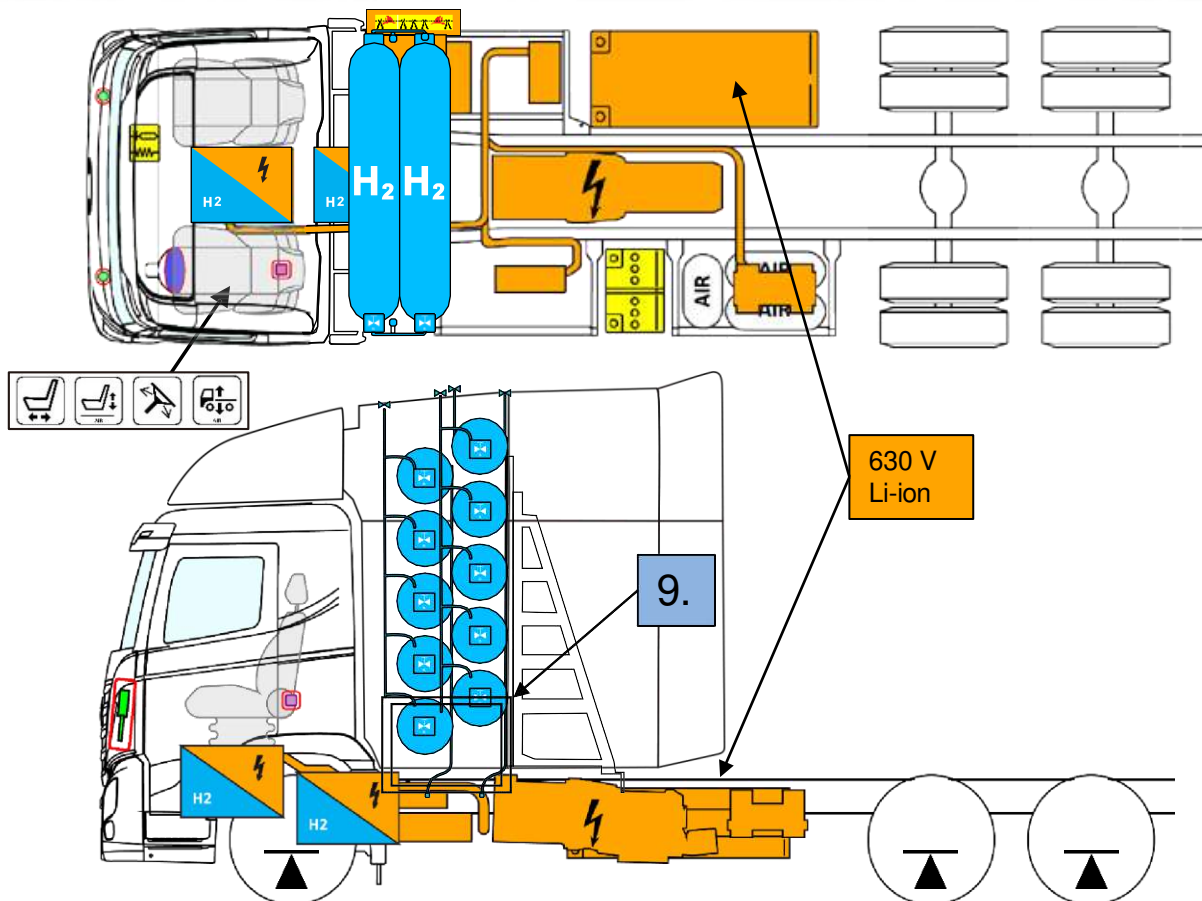

	Airbag		Seat belt pretensioner		Gas strut/ Preloaded spring		SRS control unit		Battery low voltage
	Battery pack, high-voltage		High voltage power cable		High voltage component		Cable cut		Fuel cell component
	Gas tank with gas type indication (H2)		Manual gas shut-off valve with gas type indication (H2)		Gas line (H2)		Direction hydrogen overpressure safety valve in vehicle		Lifting point; central support
	Seat adjustment, longitudinal		Seat height adjustment by air system		Steering wheel, tilt control		Height control truck, by air system		Air tank
	Special attention								


1. Identification / Recognition



LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF. SILENT MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN. WEAR APPROPRIATE PPE.

The Hyundai Xcient can be identified by some unique design features


- 1. Brand and model name
- 2. Hydrogen Storage System

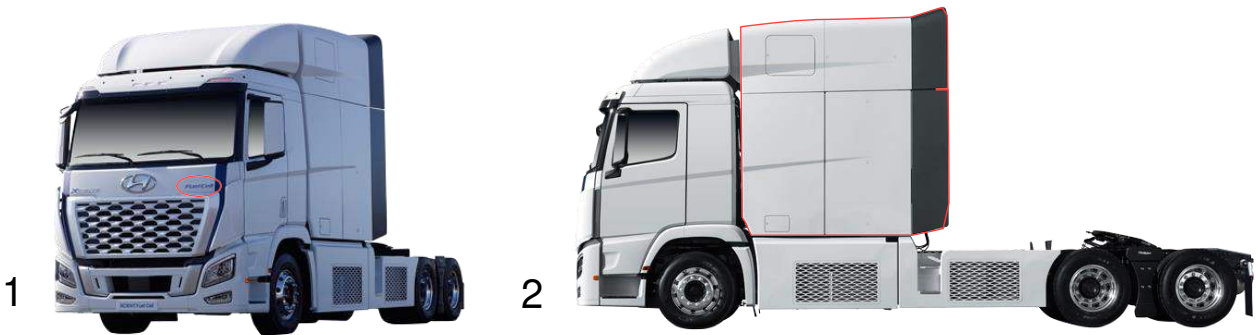

2. Immobilization / Stabilization / Lifting


Immobilize vehicle:

- 1. Block wheels and set the parking brake
Pull the both switches to select the P (park) position(Red one is for Trailer, Yellow one is for Tractor)
- 2. Select the N (Neutral) lever to put the truck into neutral

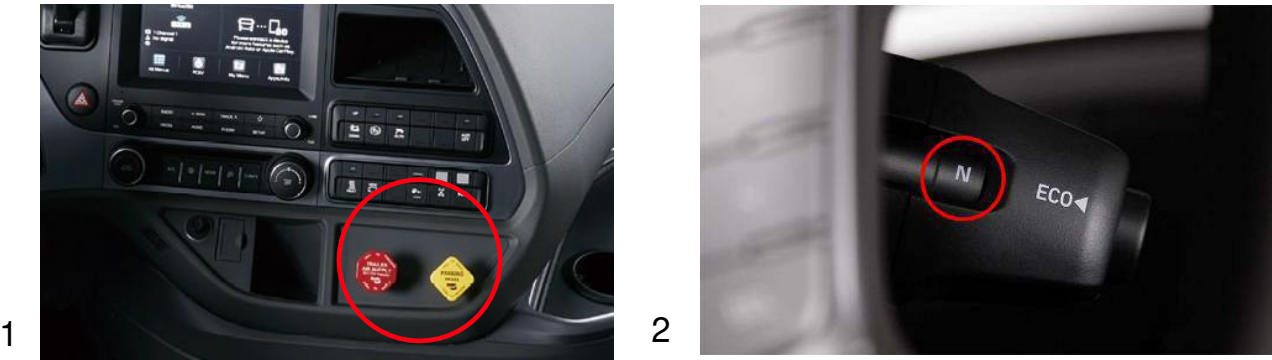

Lifting points:

- Appropriate lifting points
- High voltage battery

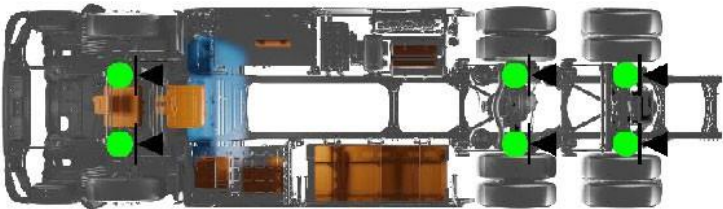

Picture from underneath

3. Disable direct hazards / Safety regulations


How to deactivate the high voltage system, when the vehicle is ON
Method 1: When the 'Ready' indicator in the instrument cluster is illuminated, press the Start/Stop button and disconnect the 24V Battery.



4. Access to occupants



5. Stored energy / liquids / gases / solids

Type	Identification	Content	
	    	Lithium Ion Nickel Manganese Cobalt Oxide	630 Volt
	 	24V Battery	24 Volt
	  	Compressed Hydrogen tank	700 bar and 68.6kg of H2 (Usable)



When conventional coolant leaks (check reservoir) from the high voltage (HV) battery cooling system, HV-battery can become unstable with risk of thermal runaway. An increasing HV-battery temperature might be an indicator of thermal runaway.



6. In case of fire



USE LARGE AMOUNTS OF PURE WATER



POTENTIAL RISK OF BATTERY RE-IGNITION /
DELAYED IGNITION!

Temperature Pressure Release Device (TPRD) opens at the 110°C (loud hissing noise).
In the event of the fire, hydrogen will be released directly from the hydrogen tank. You may hear a hissing or a roaring sound as the hydrogen escapes, and it can take up to 60 minutes for a full tank to empty.



Stay clear of the vent location as indicated by the red lines.
Avoid cutting into the hydrogen pressurized line (Both Vent and Processing line)



7. In case of submersion

- There is no increased risk of electric shock in water resulting from the high voltage system.
- If possible, remove the vehicle from the water and continue with the deactivation procedure for this vehicle (see chapter 3).

8. Towing / Transportation / Storage

Towing



Store vehicle in an open-air parking at safe distance $\geq 5\text{m}$ from other objects or vehicles!




Potential risk of battery re-ignition / delayed ignition!

9. Important additional information

Deactivate hydrogen flow.

To deactivate hydrogen supply from each tank to the stacks, turn the manual valve located at the left side of the vehicle to the right. It's recommended closing all 10 tank valves for safety purpose, even though the solenoid valves are close in case of fire.

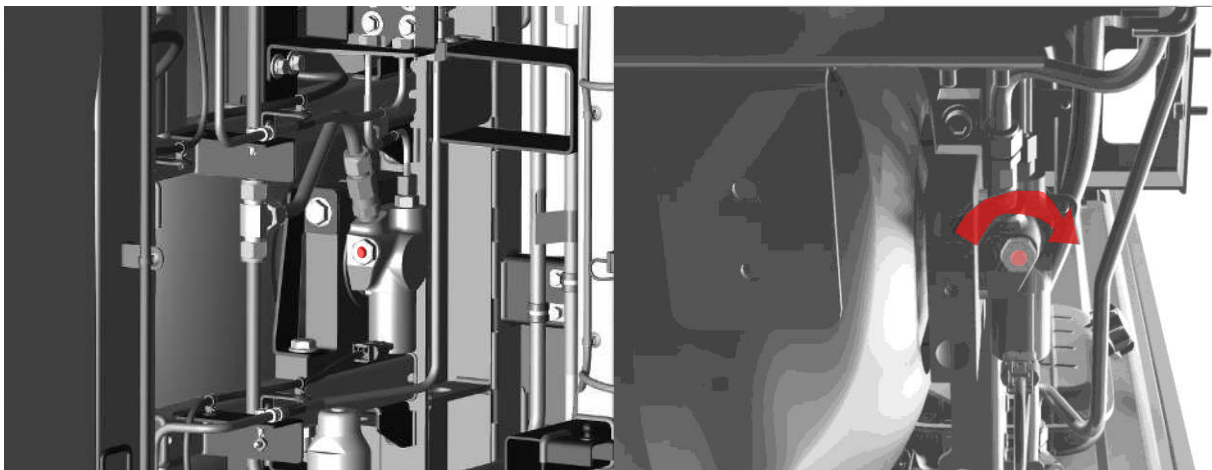

10. Explanation of pictograms used

	Height control truck, by air system		Risk of flammability
	Warning high voltage		Risk of damaging human health
	Caution		Risk of acute toxicity
	High voltage		Explosive
	Vehicle on hydrogen fuel cell electric vehicle		Risk of corrosive material / substances
	Use water to extinguish the fire		Seat height adjustment. by air system
	Use IR Camera (thermal imaging)		Seat adjustment, longitudinal
	Steering wheel, tilt control		Attention; hydrogen burns with an almost invisible flame