



Vehicle Identification/Recognition

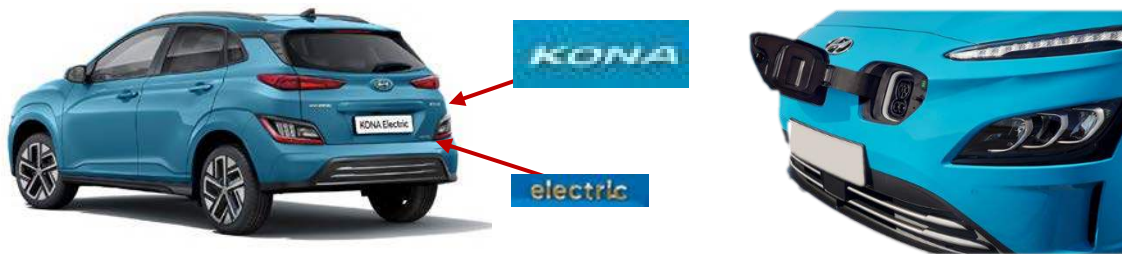

Accessing Vehicle

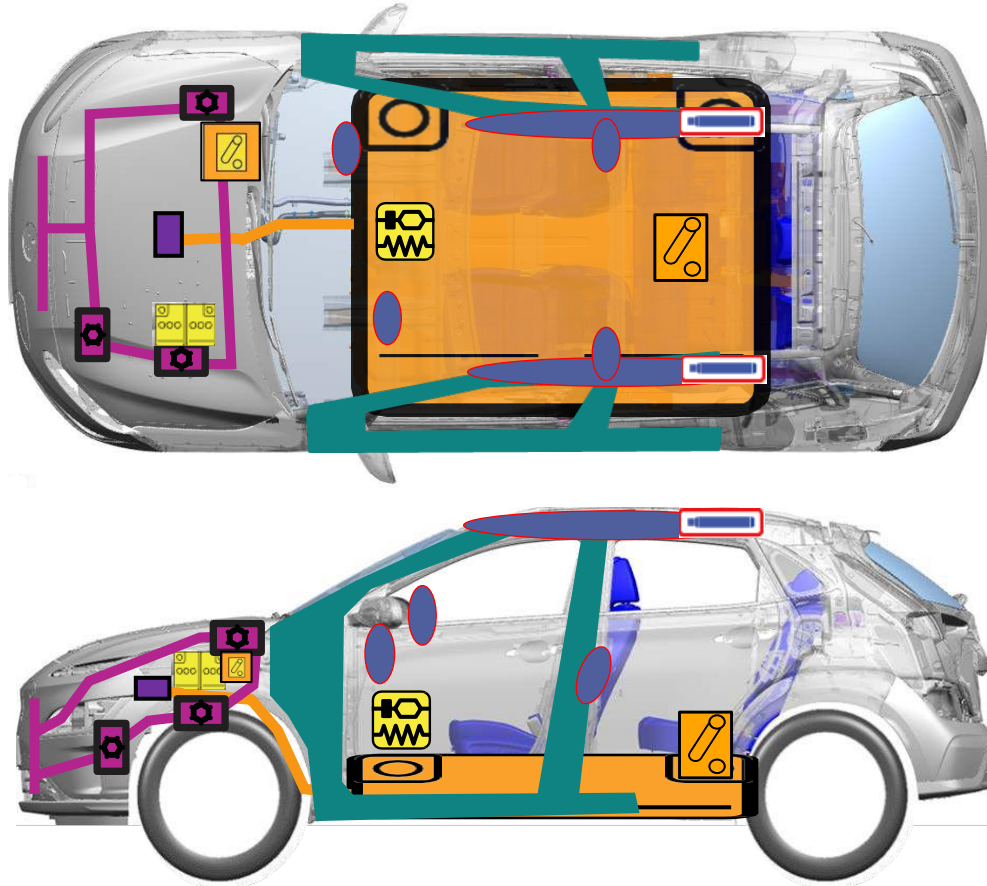


	Supplemental Restraint System Control Module (SRSCM)		Airbag		Airbag Gas Inflators
	High voltage cable		12V Battery		Air-conditioning line
	High Voltage Disconnect		OBC (On – Board Charger)		Ultra-High Strength Steel
	Low Voltage Disconnect for High Voltage		Air-conditioning component		Seat belt pretensioner
	High Voltage Battery				

Disabling Vehicle

1




2

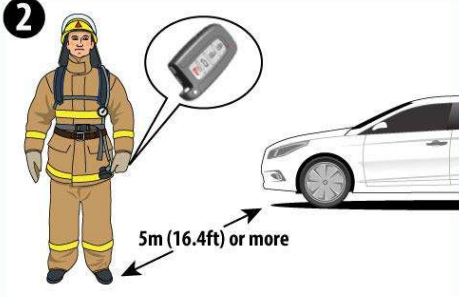

5m (16.4ft) or more

3 DISCONNECT NEGATIVE TERMINAL

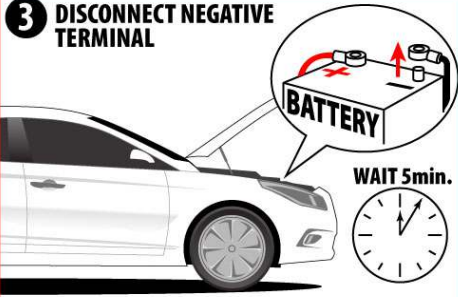


BATTERY

WAIT 5min.

OR

1

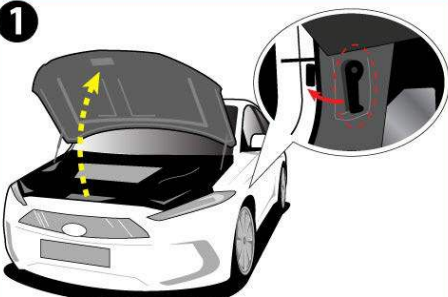


2



PULL OR CUT

3 DISCONNECT NEGATIVE TERMINAL

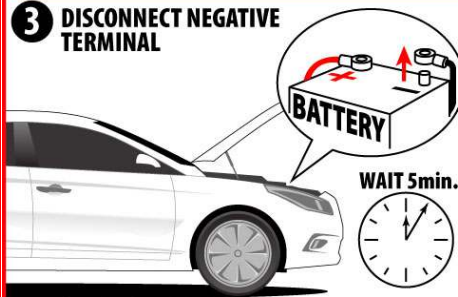


BATTERY

WAIT 5min.

OR

1

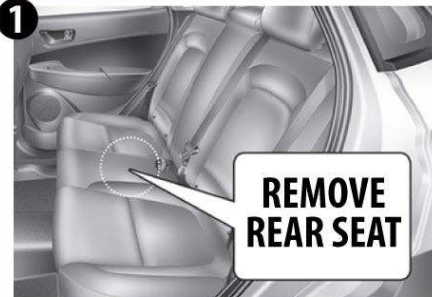

REMOVE REAR SEAT

2



A

3



REMOVE SAFETY PLUG

WAIT 5min.

Vehicle Towing Information

Tow the vehicle using a flat bed or using wheel dollies. Never tow the vehicle with the front or rear wheels on the ground



For further information, please refer to the Emergency Response Guide (ERG).

Applicable to Kona Electric vehicles first sold in the United States.	ID. No. KMH-OS EV	Version No. 01.2021.09	Page 2 of 2
---	----------------------	---------------------------	----------------