



NEW FLYER®

RESCUE SHEET


For an

XHE40


**Xcelsior Hydrogen-Electric
Transit Bus**



0. RESCUE SHEET

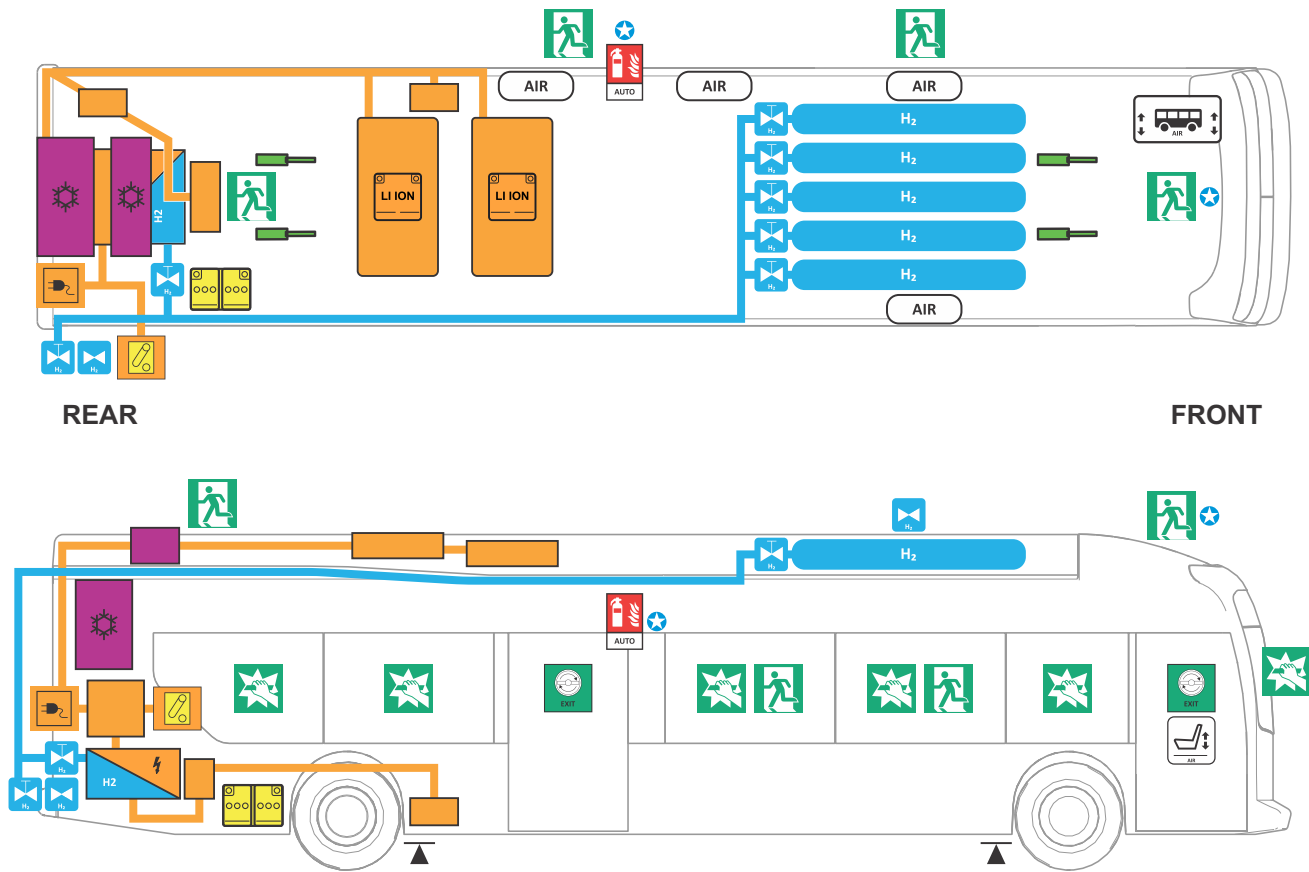

Note: Typical configuration of emergency exits, hydrogen fuel tanks, and ESS enclosures are shown; number and placement of these components may vary. Optional components marked by this symbol ★.

							
Fuel Cell Propulsion	Fuel Cell	Manual Gas Shut-Off Valve	Overpressure Safety Valve	Gas Line	Hydrogen Tank	Automatic Fire Suppression <i>(Optional)</i>	
							
High Voltage Li-ion Battery	High Voltage Component	Plug-in Charge Port	Disconnect High Voltage	High Voltage Power Cable	Air Conditioning	Low Voltage Battery	
							
Preloaded Spring	Emergency Exit	Break To Obtain Access	Emergency Door Opener	Air Tank	Seat Adjustment	Height Adjustment	Lifting Point

1. IDENTIFICATION / RECOGNITION



Hydrogen-Electric Vehicle

2. IMMOBILIZATION / STABILIZATION / LIFTING



Kneel switch located in driver's area



Seat height adjustment on driver's seat



Lift points

3. DISABLE DIRECT HAZARDS / SAFETY REGULATIONS



Shut down high voltage

4. ACCESS TO THE OCCUPANTS



Two exit doors
Note: Typical configuration shown. Placement may vary.



Two roof hatch exits, four emergency window exits
Note: Typical configuration shown. Quantity and placement may vary.



Break windows to obtain access



Steering wheel tilt control on steering column




Seat height adjustment on driver's seat



Longitudinal seat adjustment on driver's seat

5. STORED ENERGY / LIQUIDS / GASES / SOLIDS



6. IN THE EVENT OF A FIRE



Pressure Relief Devices (PRD) relieve hydrogen system pressure when the temperature of the hydrogen tanks rise above 230°F (110°C).

7. IN CASE OF SUBMERSION

