



MACK


LRBE

PRODUCTION START : 2021



33 ton vehicle
3 axes

2 lithium-ion batteries at
rear side of the cab

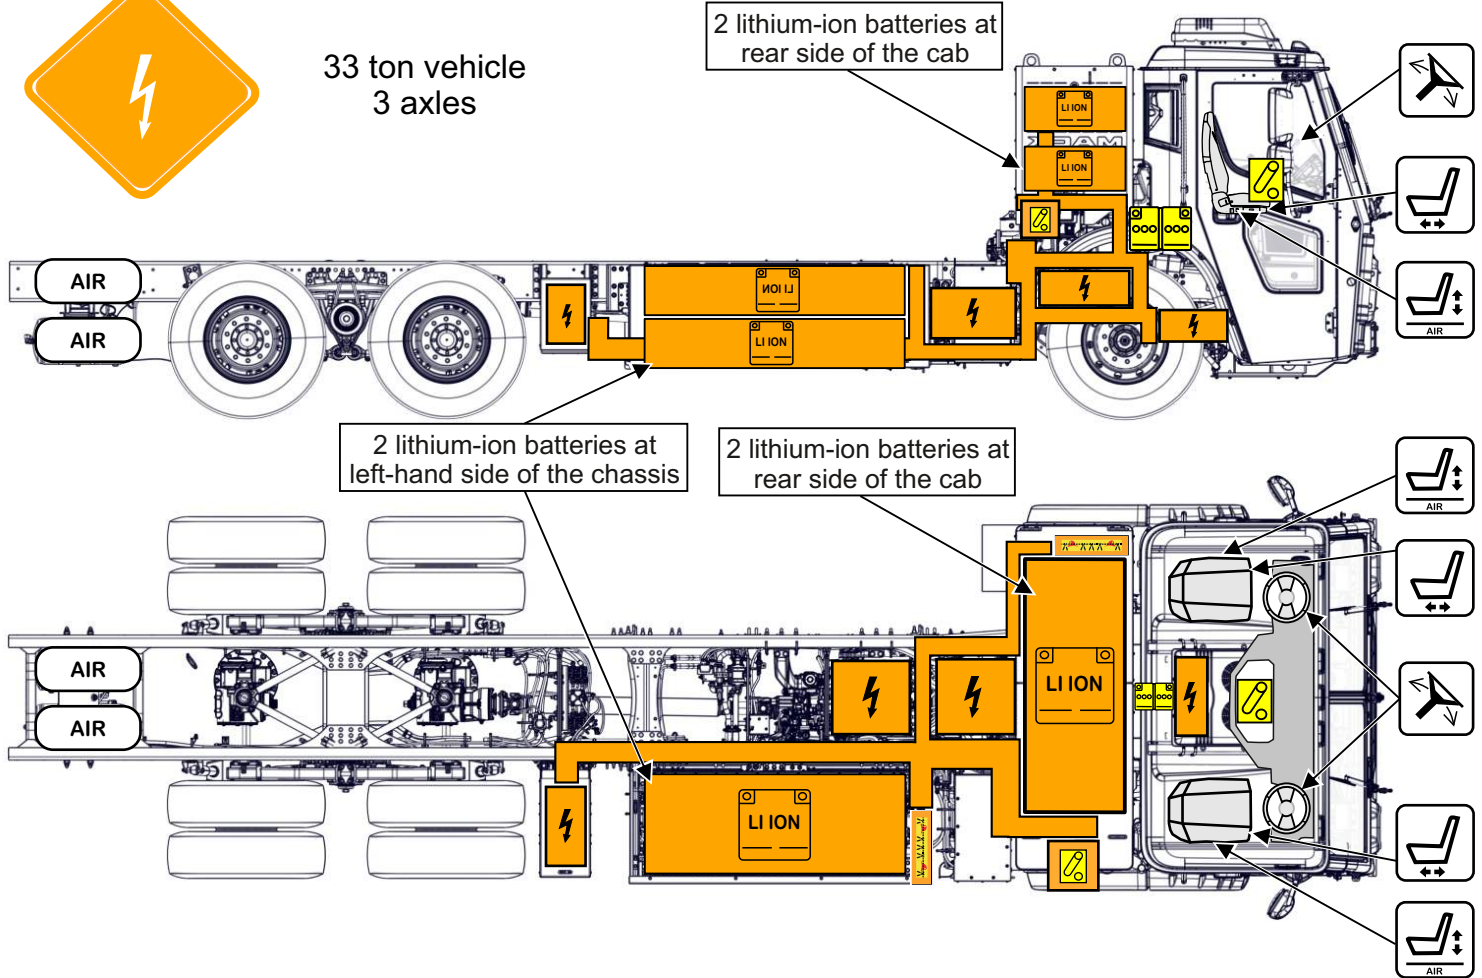

2 lithium-ion batteries at
left-hand side of the chassis


2 lithium-ion batteries at
rear side of the cab



High voltage
lithium-ion battery



Low voltage device
that disconnects the
high voltage



Low voltage battery



Air tank



Seat height adjustment



Cable cut



Steering wheel tilt
control



High voltage
component



High voltage
cable



Seat longitudinal
adjustment



Starter switch

NOTE

- (a) The above image shows information for one variant of this product. Number of axes, cab structure and number of traction batteries can vary depend on the variant of the product.
(b) These instructions do not cover the safety aspects of the components and equipments mounted by a third party (example: body builders).
(c) Discrepancy may exist in the translated documents as the original document is authored in English.

Identification number

800077265

Version number

10/2025

Page number


1/3



MACK


LRBE

PRODUCTION START : 2021



33 ton vehicle
3 axles

2 lithium-ion batteries at
rear side of the cab

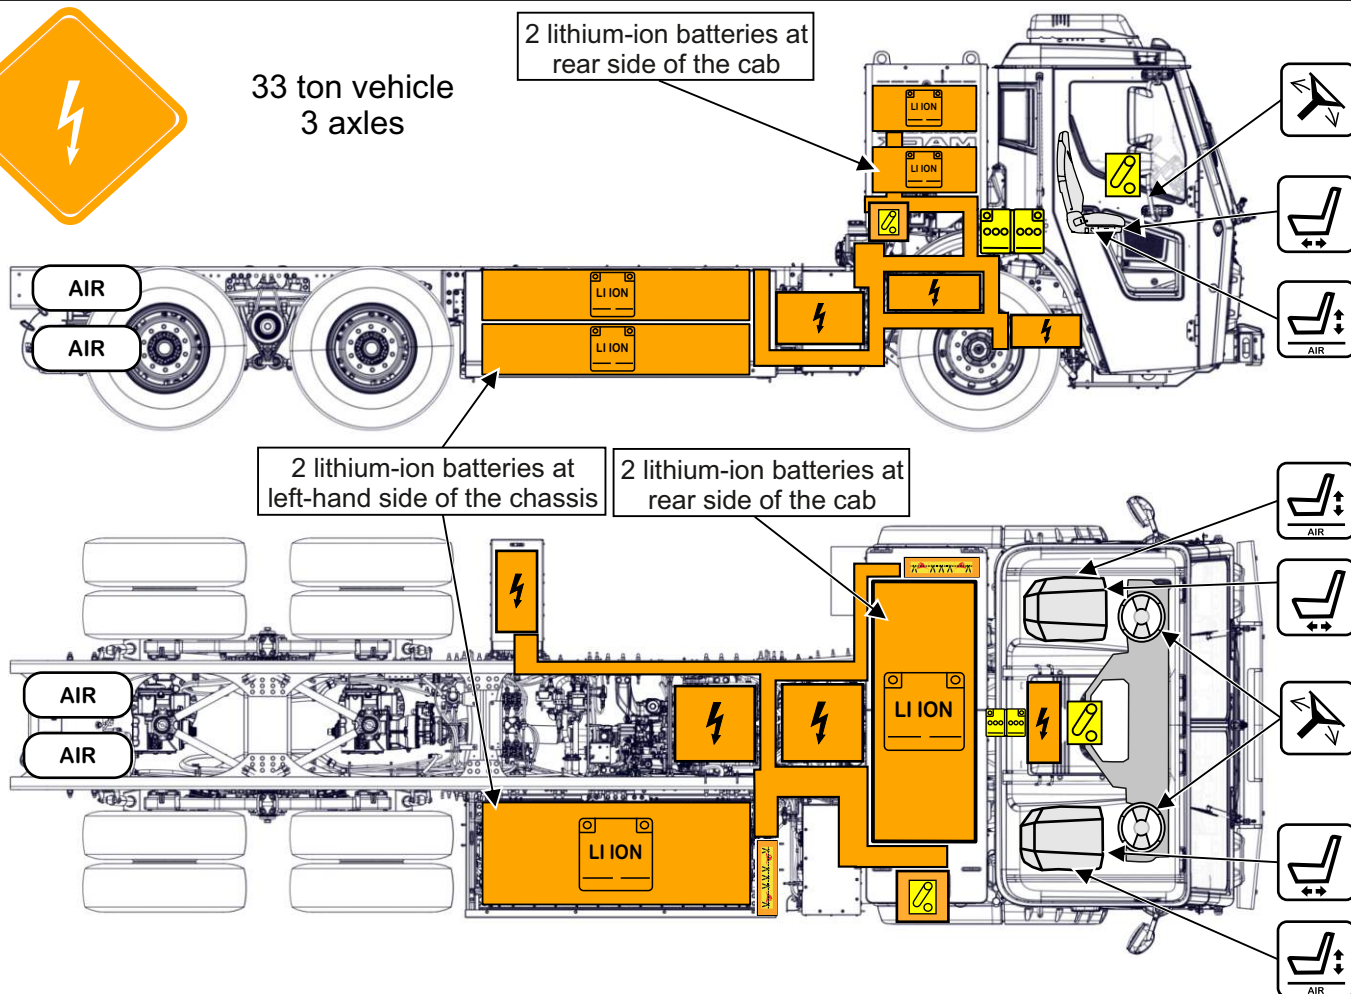

2 lithium-ion batteries at
left-hand side of the chassis


2 lithium-ion batteries at
rear side of the cab



High voltage
lithium-ion battery



Low voltage device
that disconnects the
high voltage



Low voltage battery



Air tank



Seat height adjustment



Cable cut



Steering wheel tilt
control



High voltage
component



High voltage
cable



Seat longitudinal
adjustment



Starter switch

NOTE

- (a) The above image shows information for one variant of this product. Number of axles, cab structure and number of traction batteries can vary depend on the variant of the product.
(b) These instructions do not cover the safety aspects of the components and equipments mounted by a third party (example: body builders).
(c) Discrepancy may exist in the translated documents as the original document is authored in English.

Identification number

800077265

Version number

10/2025

Page number

2/3

1. Identification/recognition




Full-electric vehicle.

2. Immobilisation/stabilization/lifting



Always approach the vehicle from the sides to stay out of the potential travel path. Due to lack of noise it may be difficult to determine the state of vehicle.

3. Disable direct hazards/safety regulations





Shut down the high voltage.



Cut the communication loop at any of the two location to shut down the high voltage.

5. Stored energy/liquid/gases/solid



6. In case of fire



7. In case of water submersion



The damage level of a submerged vehicle may not be visible. Handling a submerged truck without appropriate Personal-Protective Equipment (PPE) may result in serious injury or death due to electric shock.

If possible, disable direct hazards (Refer to “3. Disable direct hazards/safety regulations”).

8. Towing/transportation/storage



Disconnect the propeller shaft before towing.

Monitor the battery temperature.