

Timings

1: Cleary Blvd & N Pine Island Rd

											
Lane Group	SEL	SET	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations											
Traffic Volume (vph)	84	981	165	1907	242	127	274	137	198	339	142
Future Volume (vph)	84	981	165	1907	242	127	274	137	198	339	142
Turn Type	Prot	NA	Prot	NA	Perm	pm+pt	NA	Perm	pm+pt	NA	Perm
Protected Phases	1	6	5	2		7	4		3	8	
Permitted Phases					2	4		4	8		8
Detector Phase	1	6	5	2	2	7	4	4	3	8	8
Switch Phase											
Minimum Initial (s)	5.0	15.0	5.0	15.0	15.0	4.0	6.0	6.0	4.0	6.0	6.0
Minimum Split (s)	16.0	50.0	19.0	50.0	50.0	14.0	46.0	46.0	13.0	42.0	42.0
Total Split (s)	22.0	58.0	28.0	64.0	64.0	28.0	46.0	46.0	28.0	46.0	46.0
Total Split (%)	13.8%	36.3%	17.5%	40.0%	40.0%	17.5%	28.8%	28.8%	17.6%	28.8%	28.8%
Yellow Time (s)	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0
All-Red Time (s)	2.0	1.5	2.0	1.5	1.5	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.0	5.5	6.0	5.5	5.5	6.0	6.0	6.0	6.0	6.0	6.0
Lead/Lag	Lead	Lag	Lead	Lag	Lag	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	C-Min	None	C-Min	C-Min	None	None	None	None	None	None

Intersection Summary

Cycle Length: 160


Actuated Cycle Length: 160

Offset: 137 (86%), Referenced to phase 2:NWT and 6:SET, Start of Green

Natural Cycle: 130

Control Type: Actuated-Coordinated

Splits and Phases: 1: Cleary Blvd & N Pine Island Rd

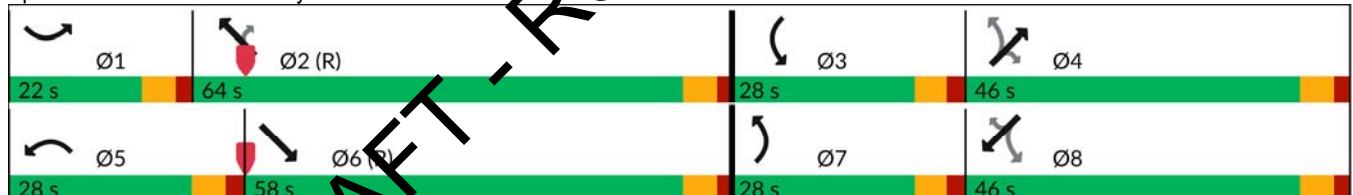

Timings

2: University Dr & Cleary Blvd

											
Lane Group	EBL	EBT	EBR	WBL	WBT	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations											
Traffic Volume (vph)	312	17	272	7	9	323	1832	23	17	1619	446
Future Volume (vph)	312	17	272	7	9	323	1832	23	17	1619	446
Turn Type	Split	NA	Perm	Split	NA	Prot	NA	Perm	Prot	NA	Perm
Protected Phases	4	4		3	3	5	2		1	6	
Permitted Phases			4					2			6
Detector Phase	4	4	4	3	3	5	2	2	1	6	6
Switch Phase											
Minimum Initial (s)	6.0	6.0	6.0	6.0	6.0	5.0	12.0	12.0	5.0	12.0	12.0
Minimum Split (s)	48.5	48.5	48.5	14.0	14.0	20.0	50.0	50.0	12.0	50.0	50.0
Total Split (s)	38.0	38.0	38.0	14.0	14.0	22.0	86.0	86.0	22.0	86.0	86.0
Total Split (%)	23.8%	23.8%	23.8%	8.8%	8.8%	13.8%	53.8%	53.8%	13.8%	53.8%	53.8%
Yellow Time (s)	4.5	4.5	4.5	4.5	4.5	5.0	5.0	5.0	4.5	5.0	5.0
All-Red Time (s)	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
Lost Time Adjust (s)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Total Lost Time (s)	6.5	6.5	6.5	6.5	6.5	7.0	7.0	7.0	7.0	7.0	7.0
Lead/Lag	Lag	Lag	Lag	Lead	Lead	Lead	Lag	Lag	Lead	Lag	Lag
Lead-Lag Optimize?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Recall Mode	None	None	None	None	None	None	C-Min	C-Min	None	C-Min	C-Min

Intersection Summary

Cycle Length: 160

Actuated Cycle Length: 160

Offset: 109 (68%), Referenced to phase 2:NBT and 6:SBT, Start of Green

Natural Cycle: 135

Control Type: Actuated-Coordinated

Splits and Phases: 2: University Dr & Cleary Blvd



HCM 7th Signalized Intersection Summary

1: Cleary Blvd & N Pine Island Rd

												
Movement	SEL	SET	SER	NWL	NWT	NWR	NEL	NET	NER	SWL	SWT	SWR
Lane Configurations												
Traffic Volume (veh/h)	121	1750	104	85	645	209	100	411	235	257	255	88
Future Volume (veh/h)	121	1750	104	85	645	209	100	411	235	257	255	88
Initial Q (Qb), veh	0	0	0	0	0	0	0	0	0	0	0	0
Lane Width Adj.	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Ped-Bike Adj(A_pbT)	1.00		1.00	1.00		1.00	1.00		1.00	1.00		1.00
Parking Bus, Adj	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Work Zone On Approach	No			No			No			No		
Adj Sat Flow, veh/h/ln	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870	1870
Adj Flow Rate, veh/h	132	1902	113	92	701	227	109	447	255	279	277	96
Peak Hour Factor	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92	0.92
Percent Heavy Veh, %	2	2	2	2	2	2	2	2	2	2	2	2
Cap, veh/h	153	2322	138	112	2289	710	339	648	289	337	915	408
Arrive On Green	0.09	0.47	0.47	0.06	0.45	0.45	0.06	0.18	0.18	0.14	0.26	0.26
Sat Flow, veh/h	1781	4930	292	1781	5106	1585	1781	2551	1585	1781	3554	1585
Grp Volume(v), veh/h	132	1312	703	92	701	227	109	447	255	279	277	96
Grp Sat Flow(s),veh/h/ln	1781	1702	1818	1781	1702	1585	1781	1777	1585	1781	1777	1585
Q Serve(g_s), s	11.7	53.1	53.4	8.2	14.0	14.8	7.9	18.8	25.1	19.9	10.0	7.7
Cycle Q Clear(g_c), s	11.7	53.1	53.4	8.2	14.0	14.8	7.9	18.8	25.1	19.9	10.0	7.7
Prop In Lane	1.00		0.16	1.00		1.00	1.00		1.00	1.00		1.00
Lane Grp Cap(c), veh/h	153	1604	856	112	2289	710	339	648	289	337	915	408
V/C Ratio(X)	0.87	0.82	0.82	0.82	0.31	0.32	0.32	0.69	0.88	0.83	0.30	0.24
Avail Cap(c_a), veh/h	189	1604	856	267	2289	710	485	888	396	349	915	408
HCM Platoon Ratio	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Upstream Filter(I)	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00
Uniform Delay (d), s/veh	72.2	36.4	36.5	74.5	28.2	28.4	48.7	61.2	63.7	44.5	47.8	46.9
Incr Delay (d2), s/veh	24.1	4.8	8.7	5.6	0.3	1.2	0.2	0.5	12.9	13.7	0.1	0.1
Initial Q Delay(d3), s/veh	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
%ile BackOfQ(50%),veh/ln	6.4	23.1	25.1	3.9	5.9	6.0	3.6	8.6	11.2	10.2	4.5	3.1
Unsig. Movement Delay, s/veh												
LnGrp Delay(d), s/veh	96.3	44.2	45.2	79.7	28.6	29.6	48.9	61.7	76.6	58.2	47.9	47.0
LnGrp LOS	F	D	D	E	C	C	D	E	E	E	D	D
Approach Vol, veh/h	2147			1020			811			652		
Approach Delay, s/veh	45.9			33.4			64.7			52.2		
Approach LOS	D			C			E			D		
Timer - Assigned Phs	1	2	3	4	5	6	7	8				
Phs Duration (G+Y+Rc), s	19.7	77.2	27.9	35.2	16.0	80.9	15.9	47.2				
Change Period (Y+Rc), s	6.0	5.5	6.0	6.0	6.0	5.5	6.0	6.0				
Max Green Setting (Gmax), s	17.0	56.5	23.0	40.0	24.0	49.5	23.0	40.0				
Max Q Clear Time (g_c+l1), s	13.7	16.8	21.9	27.1	10.2	55.4	9.9	12.0				
Green Ext Time (p_c), s	0.0	6.7	0.0	2.1	0.1	0.0	0.1	1.4				
Intersection Summary												
HCM 7th Control Delay, s/veh	47.3											
HCM 7th LOS	D											

HCM 7th TWSC
6: N Pine Island Rd & Park Center PI

Intersection												
Int Delay, s/veh	2											
Movement	EBL	EBT	EBR	WBL	WBT	WBR	NBL	NBT	NBR	SBL	SBT	SBR
Lane Configurations			↱			↱	↱↑↑↑			↱↑↑↑		
Traffic Vol, veh/h	0	0	86	0	0	18	11	877	55	41	2187	21
Future Vol, veh/h	0	0	86	0	0	18	11	877	55	41	2187	21
Conflicting Peds, #/hr	0	0	0	0	0	0	0	0	0	0	0	0
Sign Control	Stop	Stop	Stop	Stop	Stop	Stop	Free	Free	Free	Free	Free	Free
RT Channelized	-	-	None	-	-	None	-	-	None	-	-	None
Storage Length	-	-	0	-	-	0	240	-	-	250	-	-
Veh in Median Storage, #	-	0	-	-	0	-	-	0	-	-	0	-
Grade, %	-	0	-	-	0	-	-	0	-	-	0	-
Peak Hour Factor	92	92	92	92	92	92	92	92	92	92	92	92
Heavy Vehicles, %	2	2	2	2	2	2	2	2	2	2	2	2
Mvmt Flow	0	0	93	0	0	20	12	953	60	45	237	23
Major/Minor	Minor2		Minor1		Major1		Major2		Major3		Major4	
Conflicting Flow All	-	-	1200	-	-	507	2400	0	0	1813	0	0
Stage 1	-	-	-	-	-	-	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-	-	-	-	-	-	-
Critical Hdwy	-	-	7.14	-	-	7.14	5.34	-	-	5.34	-	-
Critical Hdwy Stg 1	-	-	-	-	-	-	-	-	-	-	-	-
Critical Hdwy Stg 2	-	-	-	-	-	-	-	-	-	-	-	-
Follow-up Hdwy	-	-	3.92	-	-	3.92	3.12	-	-	3.12	-	-
Pot Cap-1 Maneuver	0	0	152	0	0	438	78	-	-	386	-	-
Stage 1	0	0	-	0	0	-	-	-	-	-	-	-
Stage 2	0	0	-	0	0	-	-	-	-	-	-	-
Platoon blocked, %	-	-	-	-	-	-	-	-	-	-	-	-
Mov Cap-1 Maneuver	-	-	152	-	-	438	78	-	-	386	-	-
Mov Cap-2 Maneuver	-	-	-	-	-	-	-	-	-	-	-	-
Stage 1	-	-	-	-	-	-	-	-	-	-	-	-
Stage 2	-	-	-	-	-	-	-	-	-	-	-	-
Approach	EB		WB		NB		SB		SB		SB	
HCM Ctrl Dly, s/v	60.4		13.61		0.69		0.28		0.28		0.28	
HCM LOS	F		B									
Minor Lane/Major Mvmt	NBL	NBT	NBR	EBLn1	WBLn1	SBL	SBT	SBR				
Capacity (veh/h)	78	-	-	152	438	386	-	-				
HCM Lane V/C Ratio	0.153	-	-	0.614	0.045	0.116	-	-				
HCM Ctrl Dly (s/v)	59.3	-	-	60.4	13.6	15.5	-	-				
HCM Lane LOS	F	-	-	F	B	C	-	-				
HCM 95th %tile Q(veh)	0.5	-	-	3.3	0.1	0.4	-	-				