


版本	修订描述	日期	修订者
A	图纸发布		

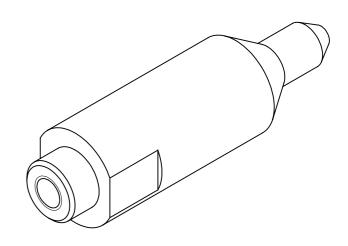

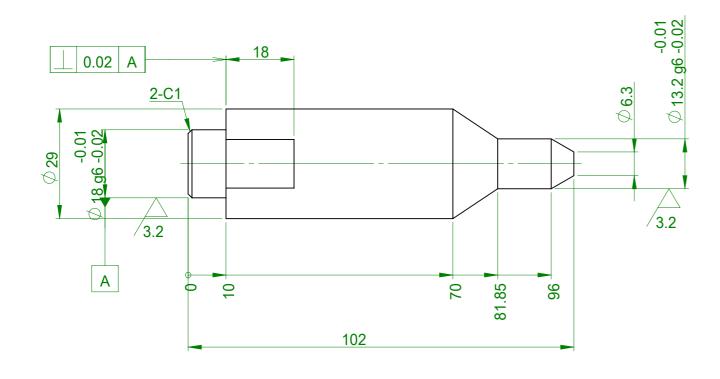

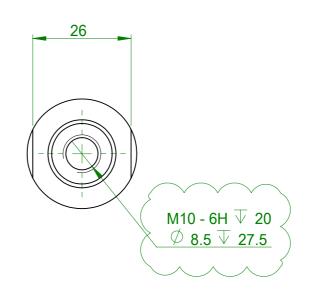

技术要求 NOTES

- 锐边倒角处理 SHARP EDGES ROUNDED
- 未注沉头孔与螺纹孔位置公差为±0.2 POSITION TOLERANCE OF ALL C-BORES AND THREADED
- 未注销孔公差为±0.02 POSITION TOLERANCE OF ALL DOWEL HOLES TO BE ±0.02 UNLESS OTHERWISE SPECIFIED

DIMENSION SECTION	0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>200	00-4000	DIME SE	NSION CTION	>0-10	>10-50	>50-120	>120-400	>400
LINEAR TOLERANCES	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	1	2.0	ANO TOLER	GULAR ANCES	±60'	±30'	±20'	±10'	±5'
SAIC	ATI			DESIG	N	D	ATE			S		1:1	SHEET 1 OF 1		
		FIRST AN PROJECT	ANGLE CTION	DRAW	Ň	D	ATE			TITLE: 上汽时代溧阳Pack线					
MATERIAL: 45#			CHEC	方泽文	D	ATE	主线小车			~					
HEAT TREAT: FINISH: 镀硬铬			APPR	V –	D	DATE			PART NAME 定位销						
			STATIO NO		S	IZE				NO.:					
			ORDE NO		WEI	GHT			P21417047-261-001-0				-025		