


版本	修订描述	日期	修订者
A	图纸发布		

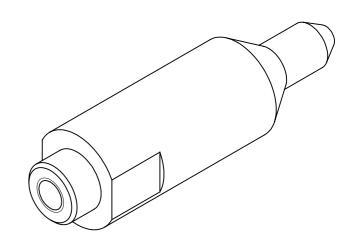

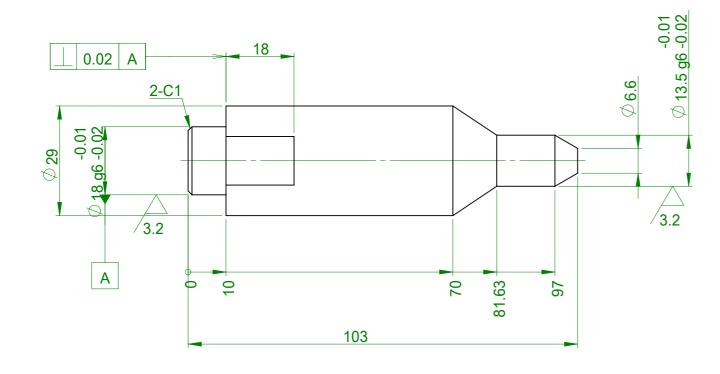

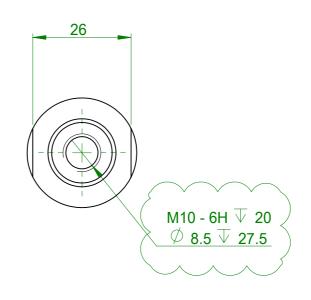

技术要求 NOTES

- 锐边倒角处理 SHARP EDGES ROUNDED
- 未注沉头孔与螺纹孔位置公差为±0.2 POSITION TOLERANCE OF ALL C-BORES AND THREADED
- 未注销孔公差为±0.02 POSITION TOLERANCE OF ALL DOWEL HOLES TO BE ±0.02 UNLESS OTHERWISE SPECIFIED

DIMENSION SECTION	0.5-6	>6-30	>30-120	>120-400	>400-1000	>1000-	-2000	>200			NSION CTION	>0-10	>10-50	>50-120	>120-400	>400
LINEAR TOLERANCES	±0.1	±0.2	±0.3	±0.5	±0.8	±1.	. 2	1			GULAR ANCES	±60'	±30'	±20'	±10'	±5'
SAIC C	ATL	FIRST ANGLE PROJECTION		DESIG	ESIGN		DA	\TE	ГЕ			SCALE	SCALE 1:1 SHEET 1 OF 1			
				DRAW	DRAWN		DA	DATE			TITLE: 上汽时代溧阳Pack线					
MATERIAL: 45#			CHEC	K 方泽文		DA	\TE			主线小车						
HEAT TREAT:			APPR	V -		DA	\TE			PART NAME 定位销						
FINISH: 镀硬铬			STATIO NO			SI	IZE			DWG NO.:						
			ORDE NO			WEIG	ЭНТ			P21417047-261-001-02						