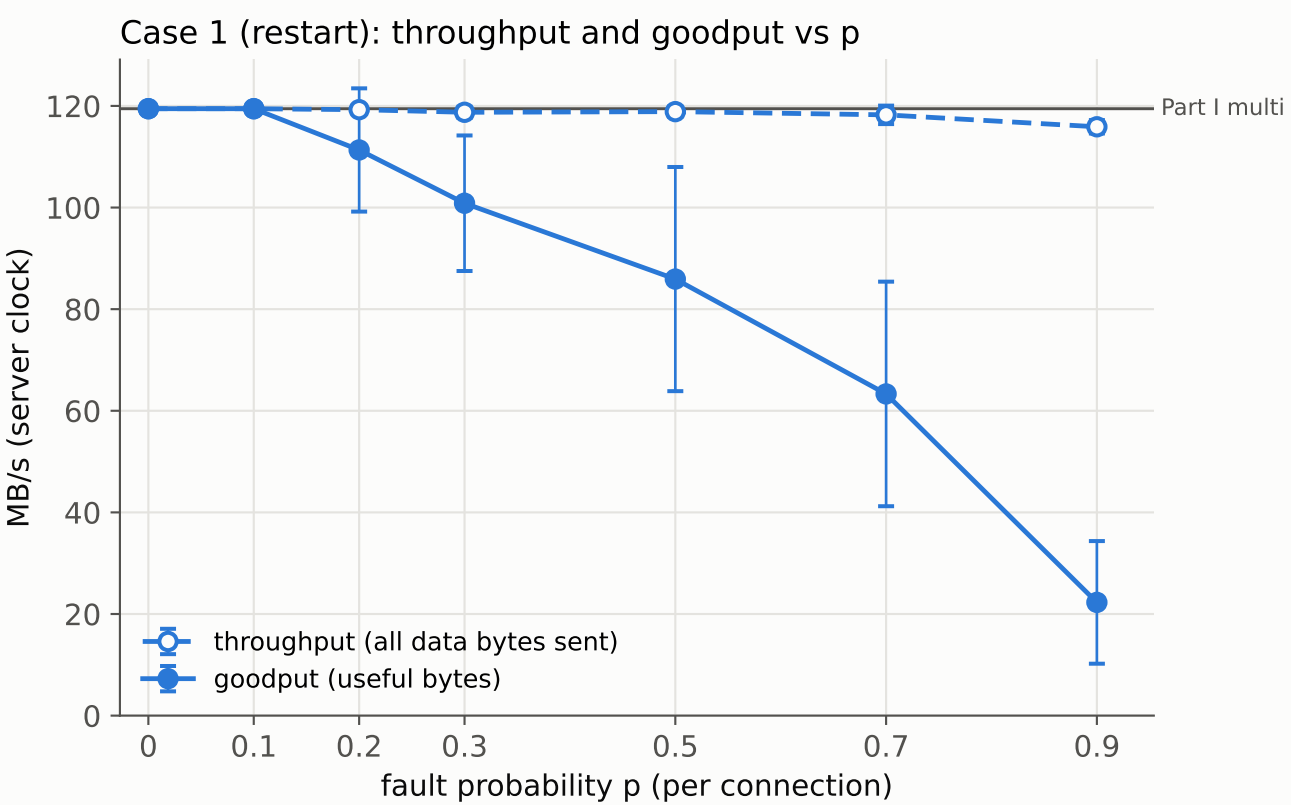
Case 1 (restart): throughput and goodput vs p
MB/s (server clock)
120
100
80
60
40
20
0
Part I multi
throughput (all data bytes sent)
goodput (useful bytes)
0
0.1
0.2
0.3
0.5
0.7
0.9
fault probability p (per connection)