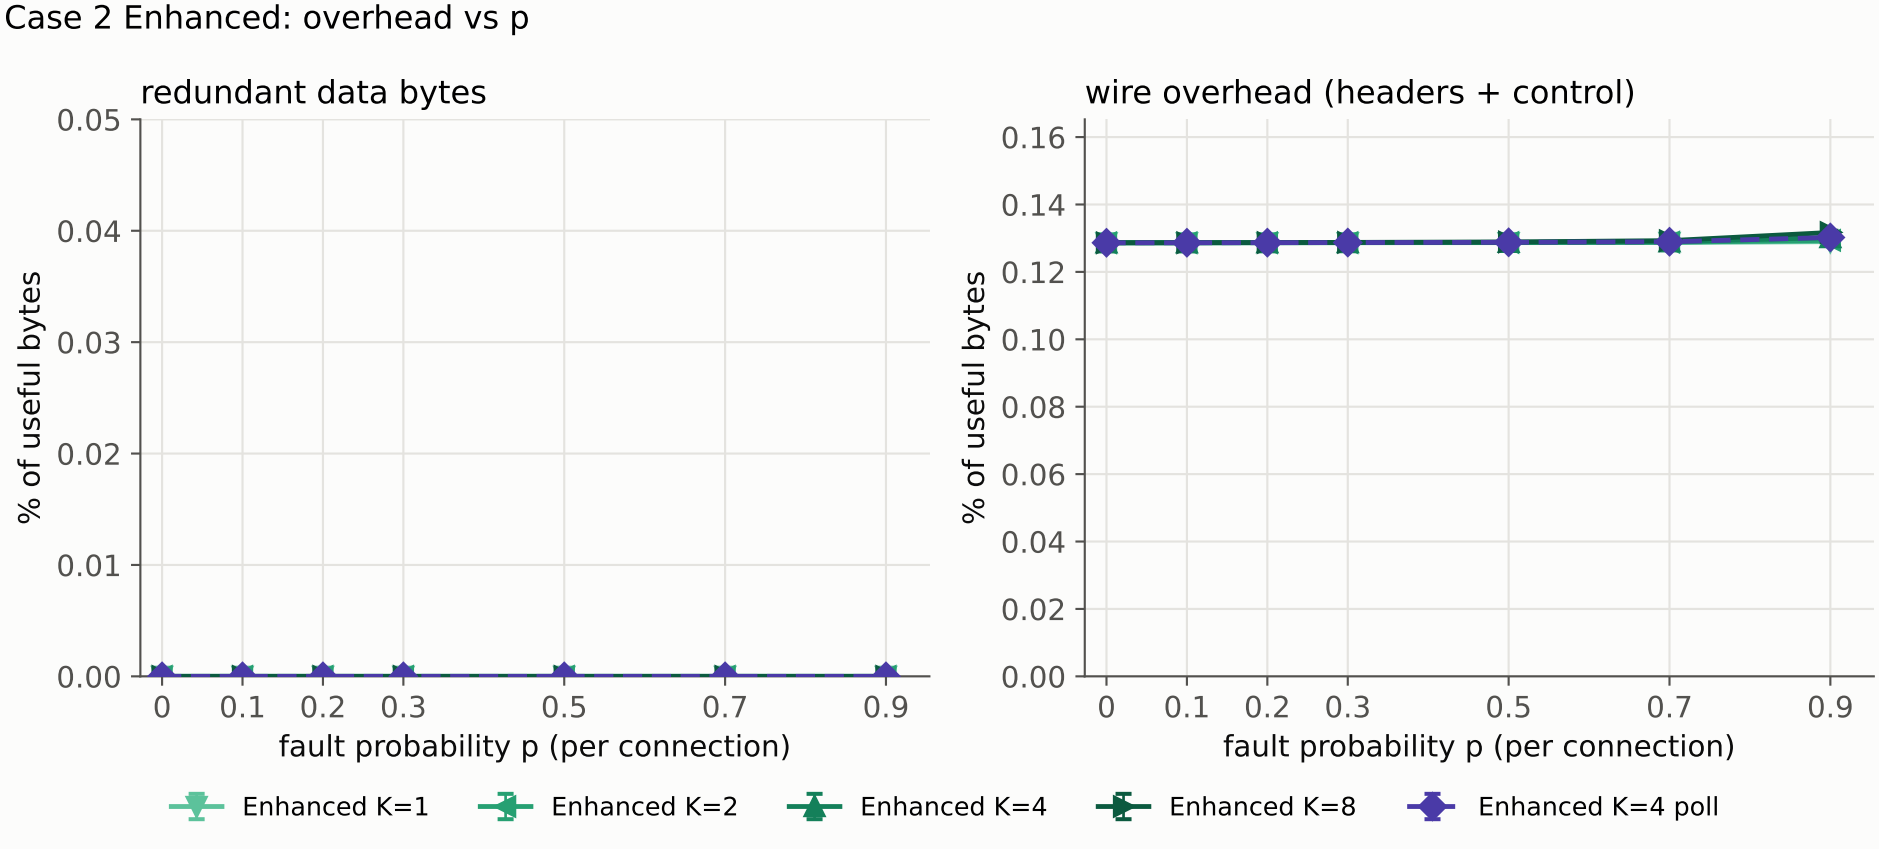
Case 2 Enhanced: overhead vs p
redundant data bytes
wire overhead (headers + control)
% of useful bytes
0.05
0.04
0.03
0.02
0.01
0.00
0.16
0.14
0.12
0.10
0.08
0.06
0.04
0.02
0.00
0
0.1
0.2
0.3
0.5
0.7
0.9
fault probability p (per connection)
Enhanced K=1
Enhanced K=2
Enhanced K=4
Enhanced K=8
Enhanced K=4 poll