



SYSTEM ALUMINIUM DOORS & WINDOWS



SOURCE



QUOTE



BUILD



GROW

Premium Aluminium Systems.
Seamless Digital Experience.



SLIDING SYSTEMS

Engineered for every space.



GRANDE
Luxury



ESSENTIAL
Premium



ECO
Standard



ECO LITE
Value

SPECIFICATION	GRANDE	ESSENTIAL	ECO	ECO LITE
Cost level	₹₹₹₹	₹₹₹	₹₹	₹
Positioning	Luxury	Premium	Standard	Value
Frame width	173 mm	119 mm	90 mm	70 mm
Max. sash height	4000 mm	2700 mm	2700 mm	2400 mm
Max. sash width	2000 mm	1500 mm	1500 mm	1200 mm
Max. shutter weight	300 kg	150 kg	150 kg	100 kg
Glass range	8-32 mm	5-20 mm	5-20 mm	5-12 mm
Interlock sightline	24 mm	23 mm	23 mm	23 mm
Ideal application	Luxury homes, villas & large openings	Premium residential	Apartments & builder projects	Budget residential

CASEMENT SYSTEMS

Engineered for every space.



**PRIME
CASEMENT**
Luxury



**CLASSIC
CASEMENT**
Premium



**VILLA DOUBLE
CASEMENT**
Standard



**VILLA ECO DOUBLE
CASEMENT**
Value

SPECIFICATION	PRIME CASEMENT	CLASSIC CASEMENT	VILLA DOUBLE CASEMENT	VILLA ECO DOUBLE CASEMENT
Cost level	₹₹₹	₹₹	₹₹₹	₹₹
Positioning	Premium	Standard	Double Casement/ Large openings	Double Casement/ Smaller Openings
Frame width	50 mm	40 mm	114 mm	91 mm
Max. sash height	2400 mm	2100 mm	2100 mm	1800 mm
Max. sash width	1200 mm	900 mm	900 mm	750 mm
Max. shutter weight	150 kg	80 kg	80 kg	50 kg
Glass range	6-34 mm	6-24 mm	6-24 mm	5-12 mm
Ideal application	Premium homes & doors	Standard Windows	Large Openings, Government & Commercial Projects	Smaller Openings, Government & Commercial Projects



SLIDE N FOLD

Wide Openings. Uninterrupted views.



Effortless
operation



Expansive
openings



High performance
& security




Seamless Indoor
outdoor living

GRANDE

Luxury. Scale. Performance

Engineered for large openings and architectural statements.

Grande delivers unmatched strength, smooth operation and refined aesthetics.



UP TO
4000 mm
SASH HEIGHT




UP TO
2000 mm
SASH WIDTH



UP TO
300 kg
SHUTTER WEIGHT



8–32 mm
GLASS RANGE



24 mm
INTERLOCK
SIGHTLINE

TECHNICAL CHARACTERISTICS

Aluminium Alloy	6063 T6
Max. Sash Height	4000 mm
Max. Sash Width	2000 mm
Max. Shutter Weight	300 kg
Glass Range	8–32 mm
Interlock Sightline	24 mm
Corner Joint	45° & 90°

PERFORMANCE (EN STANDARDS)

Air Tightness (EN 12207) Class 3	Water Tightness (EN 12208) 250 Pa	Wind Load (EN 12210) 3 kPa
--	---	----------------------------------

DESIGN HIGHLIGHTS

-  Heavy duty system for large format openings
-  Smooth sliding with high load capacity
-  Enhanced weather performance
-  Slim sightline for maximum view
-  Premium aesthetics for luxury spaces

IDEAL FOR



LUXURY HOMES &
VILLAS



LARGE OPENINGS &
PANORAMIC VIEWS



HIGH PERFORMANCE
PROJECTS




PREMIUM ARCHITECTURAL
APPLICATIONS

Grande Sliding Series

GLAZIA


Section Number	Wall Thickness mm	Weight kg/m
4411001	2 mm	2.171

2 Track Bottom/Top Frame




Section Number	Wall Thickness mm	Weight kg/m
4411002	2 mm	1.667

2 Track Left/Right Frame




Section Number	Wall Thickness mm	Weight kg/m
4411003	1.8 mm	3.131

3 Track Top/Bottom Frame




Section Number	Wall Thickness mm	Weight kg/m
4411004	2 mm	2.39

3 Track Left/Right Frame



Section Number	Wall Thickness mm	Weight kg/m
4412001	2 mm	2.392

Sash Top/Bottom




Section Number	Wall Thickness mm	Weight kg/m
4412002	2 mm	1.322

Sash Handle 54




Section Number	Wall Thickness mm	Weight kg/m
4412003	2 mm	1.595

Sash Handle 82




Section Number	Wall Thickness mm	Weight kg/m
4412004	2.5 mm	1.006

Sash Interlock




Section Number	Wall Thickness mm	Weight kg/m
4412005	2 mm	1.326

Sash Dual Interlock




Section Number	Wall Thickness mm	Weight kg/m
4412006	2.5 mm	2.330

Sash Reinforced Interlock

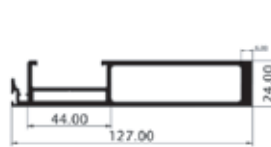


Section Number	Wall Thickness mm	Weight kg/m
4413001	1.8 mm	0.960

Mesh Mullion




Section Number	Wall Thickness mm	Weight kg/m
4414001	2 mm	0.2

Mesh Adapter




Section Number	Wall Thickness mm	Weight kg/m
4414002	1.5 mm	0.138

Mesh Adaptor Cap




Section Number	Wall Thickness mm	Weight kg/m
4414003	1.5 mm	0.314

Mating Profile



Section Number	Wall Thickness mm	Weight kg/m
4414004	2 mm	0.296

Add-on Track




Section Number	Wall Thickness mm	Weight kg/m
4414005	2 mm	0.245

Glass Reducer



Section Number	Wall Thickness mm	Weight kg/m
4414006	1.5 mm	2.392

Guide Rail



Section Number	Wall Thickness mm	Weight kg/m
4414008	2.0 mm	0.19

Reducer 2



Section Number	Wall Thickness mm	Weight kg/m
4414007	2.0 mm	0.19


Corner Profile



ESSENTIAL

Premium. Versatile. Reliable.

A perfect balance of performance and affordability. Essential is designed for modern homes and premium residential projects, offering smooth operation, durability and timeless design.



UP TO
2700 mm
SASH HEIGHT




UP TO
1500 mm
SASH WIDTH



UP TO
150 kg
SHUTTER WEIGHT



5–20 mm
GLASS RANGE



23 mm
INTERLOCK
SIGHTLINE

TECHNICAL CHARACTERISTICS

Aluminium Alloy	6063 T6
Max. Sash Height	2700 mm
Max. Sash Width	1500 mm
Max. Shutter Weight	150 kg
Glass Range	5–20 mm
Interlock Sightline	23 mm
Corner Joint	45° & 90°

PERFORMANCE (EN STANDARDS)

Air Tightness (EN 12207) Class 2	Water Tightness (EN 12208) 200 Pa	Wind Load (EN 12210) 2 kPa
--	---	----------------------------------

DESIGN HIGHLIGHTS

-  Sleek design with smooth functionality
-  Optimized for everyday use
-  Reliable performance in all conditions
-  Slim sightlines for better visibility
-  Ideal choice for premium residences

IDEAL FOR



PREMIUM
RESIDENCES



VILLAS & BUNGALOWS



LIVING ROOMS
& BEDROOMS




BALCONIES & TERRACES

Essential Sliding Series

GLAZIA


Profile Code	Wall Thickness mm	Weight kg/m
2911002	1.8 mm	2.35

3 Track Bottom/Top Frame




Profile Code	Wall Thickness mm	Weight kg/m
2911001	1.6 mm	1.35

3 Track Vertical Frame



Profile Code	Wall Thickness mm	Weight kg/m
2911004	1.8 mm	1.67

2 Track Bottom/Top Frame




Profile Code	Wall Thickness mm	Weight kg/m
2911003	1.6 mm	1.03

2 Track Vertical Frame




Profile Code	Wall Thickness mm	Weight kg/m
2912010	1.6 mm	0.7

Sash Handle




Profile Code	Wall Thickness mm	Weight kg/m
2912002	1.6 mm	0.79

Sash Top/Bottom




Profile Code	Wall Thickness mm	Weight kg/m
2912007	2.0 mm	0.57

Dual Interlock




Profile Code	Wall Thickness mm	Weight kg/m
2912004	2.0 mm	1.3

Reinforced Interlock




Profile Code	Wall Thickness mm	Weight kg/m
2912003	1.8 mm	0.53

Sash Interlock




Profile Code	Wall Thickness mm	Weight kg/m
2914008	1.4 mm	0.2

Mesh Adaptor




Profile Code	Wall Thickness mm	Weight kg/m
2914009	1.2 mm	0.09

Mesh Adaptor Cap




Profile Code	Wall Thickness mm	Weight kg/m
2912008	1.8 mm	0.893

Corner Profile




Profile Code	Wall Thickness mm	Weight kg/m
2914007	1.2 mm	0.2

Glass Reducer




Profile Code	Wall Thickness mm	Weight kg/m
2914004	1.2 mm	0.14

Add-on Track




Profile Code	Wall Thickness mm	Weight kg/m
2913003	1.6 mm	0.64

Mesh Mullion




Profile Code	Wall Thickness mm	Weight kg/m
2914001	1.2 mm	0.28

Mating Profile




Profile Code	Wall Thickness mm	Weight kg/m
2914002	1.4 mm	0.2

U-Guide Rail




Profile Code	Wall Thickness mm	Weight kg/m
2911006	1.4 mm	1.76

3Track Low Threshold



Profile Code	Wall Thickness mm	Weight kg/m
2914010	1.2 mm	0.115


Low Threshold U-Guidrail




ECO

Efficient. Practical. Dependable.

Designed for apartments and builder projects, Eco delivers reliable performance, smooth operation and practical value for everyday residential use.



UP TO
2700 mm
SASH HEIGHT




UP TO
1500 mm
SASH WIDTH



UP TO
150 kg
SHUTTER WEIGHT



5-20 mm
GLASS RANGE



23 mm
INTERLOCK
SIGHTLINE

TECHNICAL CHARACTERISTICS

Aluminium Alloy	6063 T6
Max. Sash Height	2700 mm
Max. Sash Width	1500 mm
Max. Shutter Weight	150 kg
Glass Range	5-20 mm
Interlock Sightline	23 mm
Corner Joint	45° & 90°

PERFORMANCE (EN STANDARDS)

Air Tightness (EN 12207) Class 2	Water Tightness (EN 12208) 200 Pa	Wind Load (EN 12210) 2 KPa
--	---	----------------------------------

DESIGN HIGHLIGHTS

-  Streamlined design for everyday projects
-  Efficient system for repeat applications
-  Practical choice for residential projects
-  Slim sightlines for better visibility
-  Built for consistent performance

IDEAL FOR



APARTMENTS &
BUILDER PROJECTS



STANDARD RESIDENCES



LIVING ROOMS &
BEDROOMS




BALCONIES & UTILITY AREAS

Eco Sliding Series

GLAZIA


Profile Code	Wall Thickness mm	Weight kg/m
2911005	1.6 mm	1.51

2.5 Track Frame




Profile Code	Wall Thickness mm	Weight kg/m
2912010	1.2 mm	0.61

Mesh Top & Bottom




Profile Code	Wall Thickness mm	Weight kg/m
2913002	1.2 mm	0.45

Mesh Mullion




Profile Code	Wall Thickness mm	Weight kg/m
2912009	1.2 mm	0.56

Mesh Handle




Profile Code	Wall Thickness mm	Weight kg/m
2912010	1.4 mm	0.7

Sash Handle




Profile Code	Wall Thickness mm	Weight kg/m
2912002	1.4 mm	0.79

Sash Top & Bottom




Profile Code	Wall Thickness mm	Weight kg/m
2912003	1.8 mm	0.53

Sash Interlock




Profile Code	Wall Thickness mm	Weight kg/m
2912004	2.0 mm	1.3

Reinforced Interlock




Profile Code	Wall Thickness mm	Weight kg/m
2912011	1.2 mm	0.35

Mesh Interlock




Profile Code	Wall Thickness mm	Weight kg/m
2912007	1.8 mm	0.57

Dual Interlock




Profile Code	Wall Thickness mm	Weight kg/m
2914007	1.2 mm	0.2

Glass Reducer




Profile Code	Wall Thickness mm	Weight kg/m
2914004	1.2 mm	0.14

Add-on Track




Profile Code	Wall Thickness mm	Weight kg/m
2913003	1.6 mm	0.64

Mullion



Profile Code	Wall Thickness mm	Weight kg/m
2914002	1.4 mm	0.2

U-Guiderail



ECO LITE

Simple.Efficient.Reliable.

Designed for budget residential projects and compact openings, Eco Lite delivers dependable functionality, smooth operation and practical everyday value.





UP TO
2400 mm
SASH HEIGHT



UP TO
1200 mm
SASH WIDTH



UP TO
100 kg
SHUTTER WEIGHT



5–12 mm
GLASS RANGE



23 mm
INTERLOCK
SIGHTLINE

TECHNICAL CHARACTERISTICS	
Aluminium Alloy	6063 T6
Max. Sash Height	2400 mm
Max. Sash Width	1200 mm
Max. Shutter Weight	100 kg
Glass Range	5–12 mm
Interlock Sightline	23 mm
Corner Joint	45° & 90°

PERFORMANCE (EN STANDARDS)		
Air Tightness (EN 12207) Class 2	Water Tightness (EN 12208) 200 Pa	Wind Load (EN 12210) 1.25 KPa

DESIGN HIGHLIGHTS

-  Compact system for everyday openings
-  Smooth and reliable sliding
-  Practical choice for residential projects
-  Slim sightlines for more natural light
-  Designed for consistent performance


IDEAL FOR



RESIDENTIAL HOMES



HOUSING PROJECTS

















HOSPITAL SPACES



HOSPITALITY SPACES

Eco Lite Sliding


GLAZIA

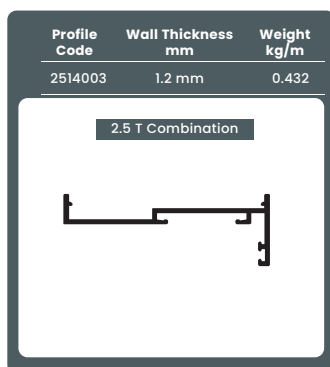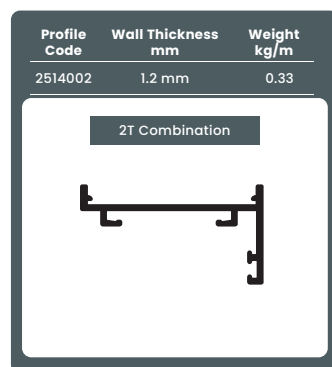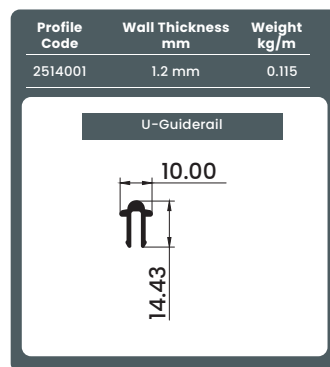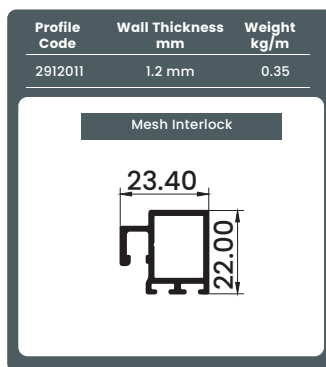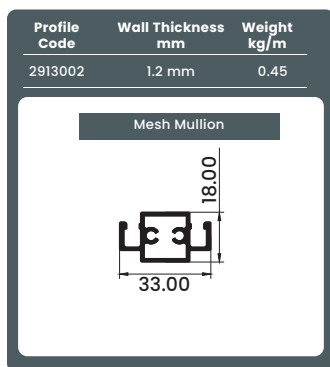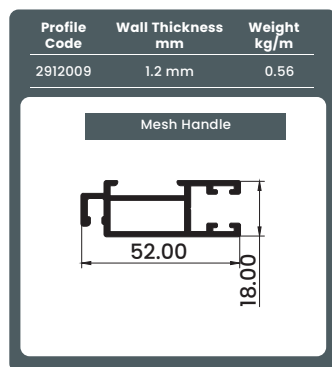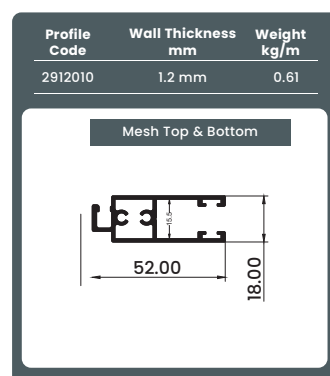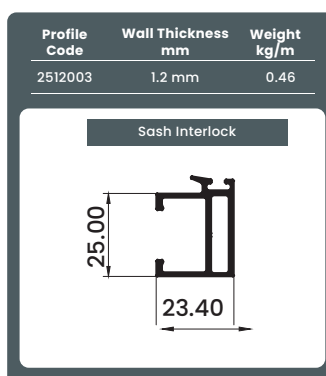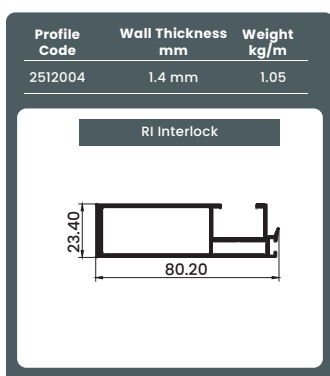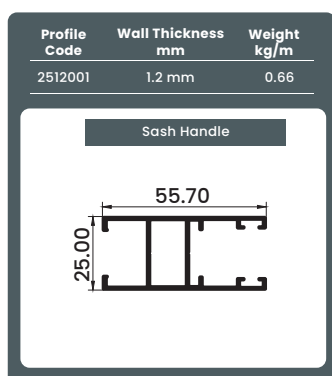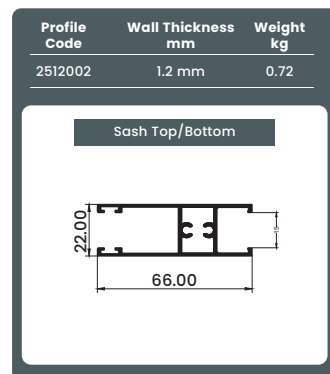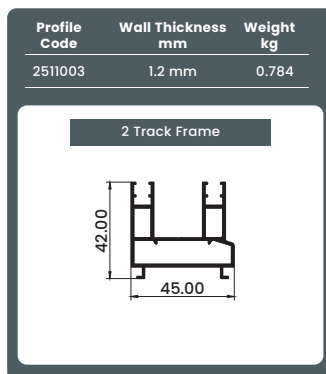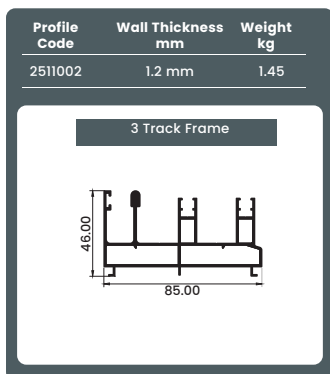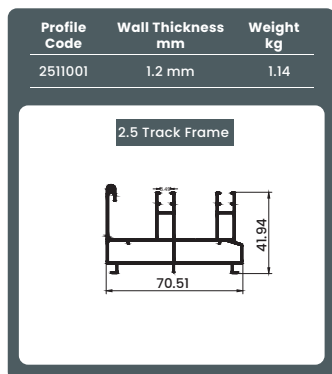


PRIME

Strength. Precision. Elegance.

Designed for premium homes and doors, Prime combines generous sash sizes, wide glass compatibility and tested weather performance in a refined casement system.



UP TO
2400 mm
SASH HEIGHT



UP TO
1200 mm
SASH WIDTH



UP TO
150 kg
SHUTTER WEIGHT



6–34 mm
GLASS RANGE



50 mm
FRAME WIDTH

TECHNICAL CHARACTERISTICS

Aluminium Alloy	6063 T6
Max. Sash Height	2400 mm
Max. Sash Width	1200 mm
Max. Shutter Weight	150 kg
Glass Range	6–34 mm
Frame Width	50 mm
Corner Joint	45°

PERFORMANCE (EN STANDARDS)

Air Tightness (EN 12207) Class 3	Water Tightness (EN 12208) 400 Pa	Wind Load (EN 12210) 4 KPa
--	---	----------------------------------

DESIGN HIGHLIGHTS

-  Large-format casement capability
-  Tested wind load up to 4 KPa
-  Supports glass up to 34 mm
-  Multi-point and smart-lock options
-  Refined proportions for premium spaces


IDEAL FOR



PREMIUM HOMES
& VILLAS



CASEMENT DOORS



LARGE WINDOWS &
OPENINGS




HIGH-PERFORMANCE
PROJECTS

Prime Casement

GLAZIA


Section Number	Wall Thickness mm	Weight kg/m
5011001	1.5 mm	0.90

Frame




Section Number	Wall Thickness mm	Weight kg/m
5011002	1.5 mm	1.10

Big Frame



Section Number	Wall Thickness mm	Weight kg/m
5011003	1.4 mm	1.62

Door Shutter Bottom



Section Number	Wall Thickness mm	Weight kg/m
5012001	1.5 mm	1.47

Outward Door Shutter



Section Number	Wall Thickness mm	Weight kg/m
5012002	1.5 mm	1.47

Inward Door Shutter



Section Number	Wall Thickness mm	Weight kg/m
5012003	1.5 mm	1.20

Outward Window




Section Number	Wall Thickness mm	Weight kg/m
5012004	1.5 mm	1.00

Inward Window




Section Number	Wall Thickness mm	Weight kg/m
5013001	1.5 mm	1.10

T-Mullion




Section Number	Wall Thickness mm	Weight kg/m
5013002	1.6 mm	1.29

Big T-Mullion




Section Number	Wall Thickness mm	Weight kg/m
5013003	1.5 mm	0.74

Flying Mullion




Section Number	Wall Thickness mm	Weight kg/m
5014001	1.2 mm	0.32

Bead SGU




Section Number	Wall Thickness mm	Weight kg/m
5014002	1.2 mm	0.26

Bead LAM




Section Number	Wall Thickness mm	Weight kg/m
5014003	1.2 mm	0.20

Bead DGU



Section Number	Wall Thickness mm	Weight kg/m
5014004	1.2 mm	0.23

Bead (24-28mm Glass)



Section Number	Wall Thickness mm	Weight kg/m
5014005	1.5 mm	0.47

Door Bottom



Section Number	Wall Thickness mm	Weight kg/m
5011004	1.2 mm	0.4


Low Threshold Bottom Frame




CLASSIC

Reliable. Practical. Timeless.

Designed for standard residential windows, Classic combines dependable performance, practical proportions and versatile everyday use.



UP TO
2100 mm
SASH HEIGHT



UP TO
900 mm
SASH WIDTH



UP TO
80 kg
SHUTTER WEIGHT



6–24 mm
GLASS RANGE



40 mm
INTERLOCK
SIGHTLINE

TECHNICAL CHARACTERISTICS

Aluminium Alloy	6063 T6
Max. Sash Height	2100 mm
Max. Sash Width	900 mm
Max. Shutter Weight	80 kg
Glass Range	6–24 mm
Frame width	40 mm
Corner Joint	45°

PERFORMANCE (EN STANDARDS)

Air Tightness (EN 12207) Class 3	Water Tightness (EN 12208) 250 Pa	Wind Load (EN 12210) 3 KPa
--	---	----------------------------------

DESIGN HIGHLIGHTS

-  Practical system for standard openings
-  Tested wind load up to 3 KPa
-  Supports glass up to 24 mm
-  Multi-point and smart-lock options
-  Dependable everyday performance

IDEAL FOR



STANDARD
WINDOWS



APARTMENTS & HOMES



LIVING ROOMS &
BEDROOMS



BUILDER PROJECTS

Classic Casement

GLAZIA

Section Number	Wall Thickness mm	Weight kg/m
4011001	1.4 mm	0.58

Frame



Section Number	Wall Thickness mm	Weight kg/m
4011002	1.5 mm	0.80

Big Frame



Section Number	Wall Thickness mm	Weight kg/m
4011003	1.5 mm	1.33

Door Shutter Bottom




Section Number	Wall Thickness mm	Weight kg/m
4012001	1.2 mm	0.78

Outward Shutter



Section Number	Wall Thickness mm	Weight kg/m
4012002	1.5 mm	0.93

Inward Shutter (Big)




Section Number	Wall Thickness mm	Weight kg/m
4012003	1.3 mm	0.71

Inward Shutter (Small)



Section Number	Wall Thickness mm	Weight kg/m
4013001	1.4 mm	0.69

T-Mullion



Section Number	Wall Thickness mm	Weight kg/m
4014001	1.0 mm	0.21

Bead SGU




Section Number	Wall Thickness mm	Weight kg/m
4014002	1.0 mm	0.17

Bead DGU




Section Number	Wall Thickness mm	Weight kg/m
4013002	1.3 mm	0.71

Flying Mullion



Section Number	Wall Thickness mm	Weight kg/m
4014003	1.2 mm	0.2

Laminated Glass Bead



VILLA FAMILY

Two depths. One dependable family.

A versatile double-casement range for larger and compact openings across institutional, commercial and residential projects.



VILLA DOUBLE CASEMENT (114 mm SYSTEM)



UP TO
1800 mm
SASH HEIGHT



UP TO
900 mm
SASH WIDTH



UP TO
80 kg
SHUTTER WEIGHT



6–24 mm
GLASS RANGE



114 mm
FRAME WIDTH

ECO VILLA DOUBLE CASEMENT (91 mm SYSTEM)



UP TO
1800 mm
SASH HEIGHT



UP TO
900 mm
SASH WIDTH



UP TO
80 kg
SHUTTER WEIGHT



6–24 mm
GLASS RANGE



91 mm
FRAME WIDTH

TECHNICAL CHARACTERISTICS

	VILLA 114	VILLA 91
Aluminium Alloy	6063 T6	6063 T6
Max. Sash Height	2100 mm	1800 mm
Max. Sash Width	900 mm	750 mm
Max. Shutter Weight	80 kg	50 kg
Glass Range	6–24 mm	5–12 mm
Corner Joint	45°	45°

PERFORMANCE (EN STANDARDS)

Air Tightness (EN 12207) Class 3	Water Tightness (EN 12208) 250 Pa	Wind Load (EN 12210) 2.5 KPa
--	---	------------------------------------

DESIGN HIGHLIGHTS

-  Two system depths
-  Double-casement architecture
-  Large and compact opening options
-  Multi-point locking
-  Built for project versatility

IDEAL FOR



LARGE OPENINGS



GOVERNMENT
PROJECTS









COMMERCIAL
BUILDINGS









COMPACT OPENINGS

Villa Double Casement

GLAZIA

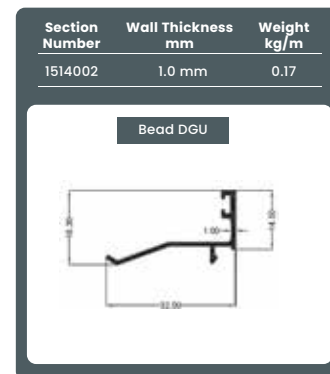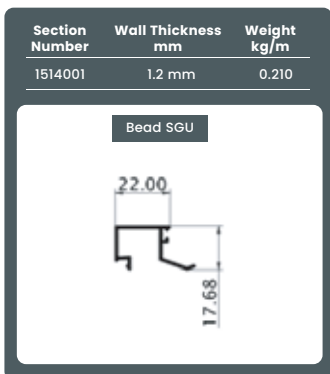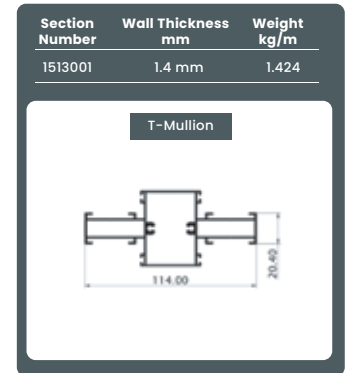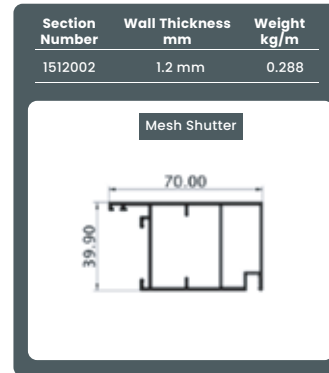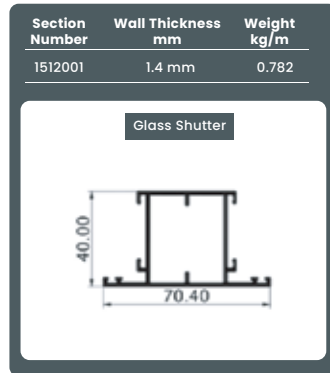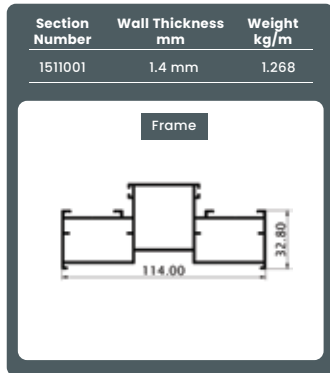


Eco Villa Double Casement

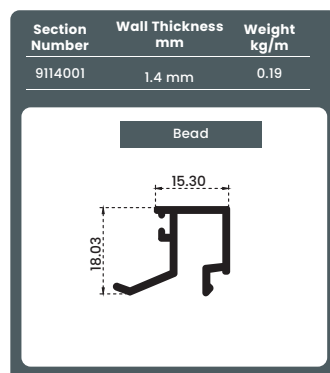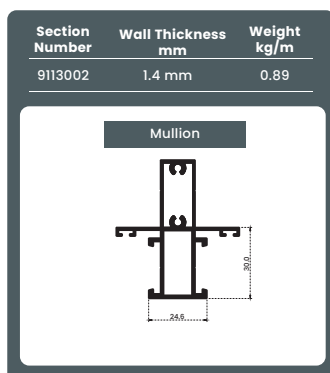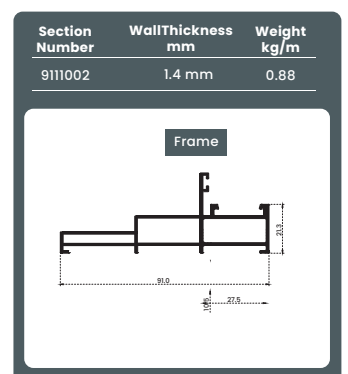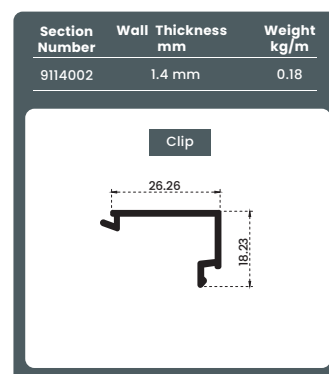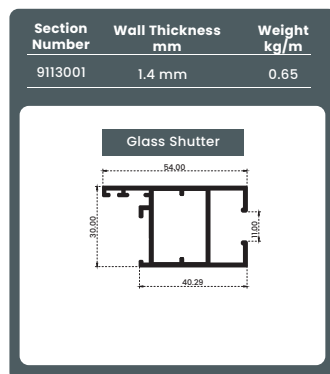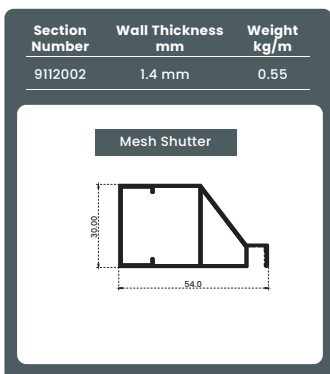


SLIDE N FOLD

Open wider. Live larger.

Designed for wide openings and panoramic spaces, Slide n Fold brings multiple glazed panels together in one smooth, space-transforming system.



UP TO
3000 mm
SASH HEIGHT



UP TO
1000 mm
SASH WIDTH



UP TO
150 kg
SHUTTER WEIGHT



6-32 mm
GLASS RANGE



CONCEALED
BOTTOM TRACK

TECHNICAL CHARACTERISTICS

Aluminium Alloy	6063 T6
Max. Sash Height	3000 mm
Max. Sash Width	1000 mm
Max. Shutter Weight	150 kg
Glass Range	6-32 mm
Corner Joint	45°

PERFORMANCE (EN STANDARDS)

Air Tightness (EN 12207) Class 2	Water Tightness (EN 12208) 150 Pa	Wind Load (EN 12210) 1.5 k Pa
--	---	-------------------------------------

DESIGN HIGHLIGHTS

-  Wide-opening capability
-  Smooth panel stacking
-  Concealed bottom track
-  Supports glass up to 32 mm
-  Multi-point and shoot-bolt locking

IDEAL FOR



LUXURY VILLAS



PATIOS & GARDENS



HOSPITALITY SPACES




FARMHOUSES

Slide n Fold

GLAZIA


Section Number	Wall Thickness mm	Weight kg/m
5011002	1.5 mm	1.10

Big Frame



Section Number	Wall Thickness mm	Weight kg/m
5012001	1.5 mm	1.45

Outward Door Shutter




Section Number	Wall Thickness mm	Weight kg/m
5012002	1.5 mm	1.47

Inward Door Shutter




Section Number	Wall Thickness mm	Weight kg/m
5013003	1.5 mm	0.74

Flying Mullion




Section Number	Wall Thickness mm	Weight kg/m
5014001	1.2 mm	0.32

Bead SGU




Section Number	Wall Thickness mm	Weight kg/m
5014002	1.0 mm	0.26

Bead LAM



Section Number	Wall Thickness mm	Weight kg/m
5014003	2.0 mm	3.23

Concealed Bottom Track





LET'S BUILD BETTER SPACES

We're here when you need us.



+91 99580 53708
+91 93548 76670



www.glazia.in



sales@glazia.in



177/2, Badkhal Pali Road,
opp. PSP Dharam
Kanta, Faridabad,
Haryana, 121004

MORE THAN ALUMINIUM.
MORE THAN WINDOWS.
MORE THAN SYSTEMS.

WE'RE BUILDING THE
FUTURE OF BUILDINGS.



Jaswant Singh Ladi

Co-Founder

Navdeep Kamboj

Co-Founder