

Bombardier Global 7500

Serial No. 70147, Registration N588CH

- **Interior Renderings**
- **Floor Plan**
- **Selected Options and Customization**
- **China, Crystal and Flatware**
- **Baseline Aircraft Specification**







This information is provided as a visual concept only, and shall not be construed as a representation of any final design, engineering or contractual obligation. Certain details may vary such as wood grain, material color, pattern scale etc. Certain items have been omitted; please refer to layouts for details.



This information is provided as a visual concept only, and shall not be construed as a representation of any final design, engineering or contractual obligation. Certain details may vary such as wood grain, material color, pattern scale etc. Certain items have been omitted; please refer to layouts for details.



This information is provided as a visual concept only, and shall not be construed as a representation of any final design, engineering or contractual obligation. Certain details may vary such as wood grain, material color, pattern scale etc. Certain items have been omitted; please refer to layouts for details.



This information is provided as a visual concept only, and shall not be construed as a representation of any final design, engineering or contractual obligation. Certain details may vary such as wood grain, material color, pattern scale etc. Certain items have been omitted; please refer to layouts for details.








This information is provided as a visual concept only, and shall not be construed as a representation of any final design, engineering or contractual obligation. Certain details may vary such as wood grain, material color, pattern scale etc. Certain items have been omitted; please refer to layouts for details.





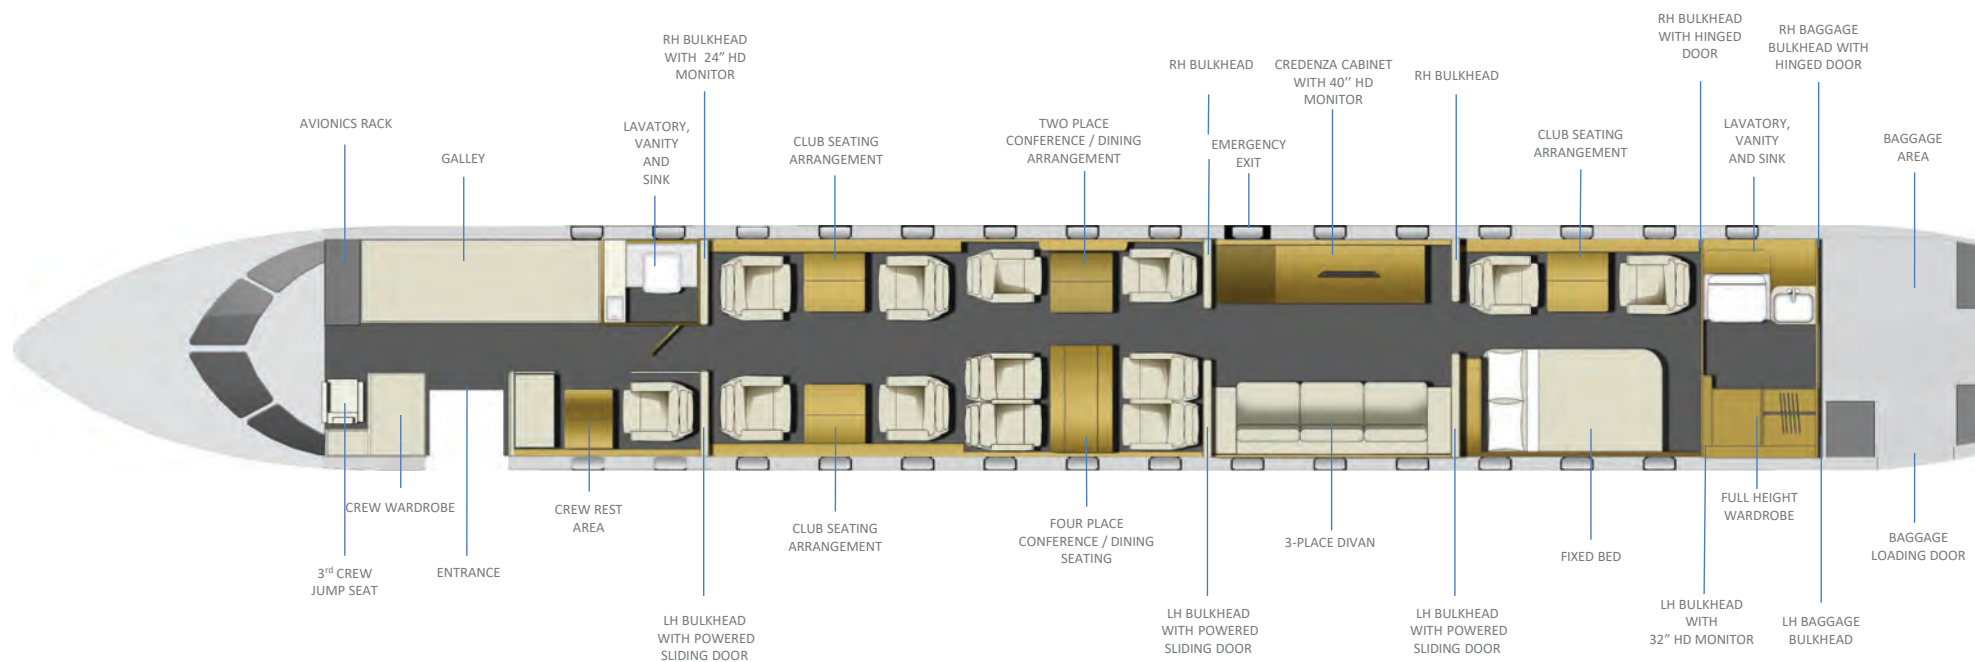

Selected Options and Customization

Options and Customization

Reference #	Description	Price (US\$)
-------------	-------------	--------------

Published Options		
2530-0005	Warming Drawer	33,100
3441-0002	Predictive Windshear	64,000
3441-0003	Vertical Weather	51,300
2426-0002	2nd Dual Frequency Converter Unit (DFCU)	69,300
2580-0001	Enhanced Sound Proofing	222,900
3447-0001	Lightning Detection System (LDS)	71,700
2560-0002	Flight Crew Emergency Vision Assurance System (EVAS)	82,500
2500-3024	Stateroom - RH Narrow Single Lounge Seats & LH Single Bed	617,200
3441-0001	ADS-B In (Cockpit display of Traffic Information (CDT1))	102,100
Sub-Total – Published Options		\$1,314,100

Cabin Configuration and Customization Changes

Certification & Operational

0000-0000	Country: USA	
3133-0001	Quick Access Recorder (QAR)	46,500
0000-0003	FAR Part 135 Operations: (3) Pilot Crew, flight up to 12 hours (includes crew area acoustic curtain & crew area leveling mattress)	40,900

Emergency Equipment

2511-0013	Rechargeable Flashlight installed in aft wardrobe	Included
2560-0003-1	Defibrillator (entrance enclosure)	Included

Avionics & Flight Deck

2515-0010	Jumpseat sheep skin cover	Included
-----------	---------------------------	----------

Entrance Area

2500-5002	Standard Entrance Area- RH Galley, Small Lavatory & LH Crew Area	Included
2502-0002	Additional pull-out worksurface under Microwave Oven	Included
1120-018	COTS Equipment coffee maker - Nesting door & tray	No upcharge
2500-8102	Standard Crew Rest Area (Part 135 - 1 Crew) + Mid Overhead Bin	Included
2503-0004	STD Crew Area - Fwd Compartment - 2 storage bins	Included
	Increase the galley sink depth by 2 inches	9,500

Main Cabin – Zone 1 to 4

2520-0002	Main Cabin Gaspers	Included
-----------	--------------------	----------

Reference #	Description	Price (US\$)
2500-3001	Zone 1 - RH & LH Single Lounge Seats	Included
2515-0013	Crew Area and Lounge Seat - Depth Adjust (QTY 2) - Zone 1 Fwd Facing	21,300
2500-8841	Zone 1 - Fwd Cabin Bulkhead - LH Door / RH 24" Flush Mount Monitor	Included
2500-3018	Zone 2 - 6 places Conference Grouping (RH Single and LH Conference Seats)	Included
2500-3004	Zone 3 - RH Credenza & LH Divan	Included
2504-0011	40" Stand up Monitor on Credenza instead of 32" Monitor	19,500
2500-3025	Zone 4 - Stateroom - RH Wardrobe, Lounge Seat & LH Single Bed	Included
2500-8212	Mattress Firmness - Medium	Included
2500-8205	Bed Headboard - Leather	Included
2511-0032	Zone 4 - Aft Wardrobe - 32" Flush Mount Monitor on bulkhead fwd face	21,500
Aft Lavatory & Wardrobe		
2500-6001	Standard Aft Lavatory - RH Toilet Enclosure, Vanity & LH Wardrobe	Included
2511-0001	Std Aft Wardrobe - Aft Compartment - No Shelves	Included
2511-0008	Std Aft Wardrobe - Fwd Compartment - Removable Shelves, Coat Rod and Bottom Drawer	Included
2511-0014	Aft Wardrobe – Header – Pop-out Coat rod (Qty 2)	2,900
Baggage Area		
2516-0002	Additional Water Tank Enclosure Baggage Shelves	12,600
2516-0003	Additional Baggage Coat Rod	1,700
	Sub-Total – Cabin Configuration and Customization	176,400
Design Details		
1144-015	Crew Area Fwd Cabinet Aft Face – Veneer	3,400
1145-012	Veneer table with inlay and bullnoses on all 4 sides	32,100
2519-0327	Bulkhead Full Finish – Veneer with one 1/8" inlay	43,200
2519-0721	Aft Lavatory Floor - Wood	51,200
1145-016	International headboard design changes	26,000
	Change standard finish materials of cabinets to custom colours	68,700
	Changes to material selections	114,000
	Premium Carpet Selection	26,000
	Sub-Total – Design Materials	364,600
Loose Equipment & Spares		
	China, Crystal and Software	58,000
	Sub-Total – Loose Equipment & Spares	58,000
	Grand-Total	\$1,913,100

China, Crystal, Flatware

DESCRIPTION	QTY
CHINA (PICKARD UNDECORATED WHITE)	
PICKUNDECO-001 PICKARD UNDECORATED WHITE DINNER PLATE	22
PICKUNDECO-005 PICKARD UNDECORATED WHITE SALAD PLATE	22
PICKUNDECO-009 PICKARD UNDECORATED WHITE BREAD PLATE	22
PICKUNDECO-012 PICKARD UNDECORATED WHITE TEA CUP	14
PICKUNDECO-019 PICKARD UNDECORATED WHITE TEA SAUCER	14
PICKUNDECO-016 PICKARD UNDECORATED WHITE ESPRESSO CUP	14
PICKUNDECO-021 PICKARD UNDECORATED WHITE ESPRESSO SAUCER	14
PICKUNDECO-029 PICKARD UNDECORATED WHITE EMBASSY SOUP BOWL	22
PICKUNDECO-017 PICKARD UNDECORATED WHITE AIRCRAFT MUG	14
CRYSTAL (CHRISTOFLE IRIANA)	
CHRIS07902002 CHRISTOFLE IRIANA RED WINE IRIANA	18
CHRIS07902003 CHRISTOFLE IRIANA WHITE WINE IRIANA	18
CHRIS07902010 CHRISTOFLE IRIANA CHAMP FLUTE IRIANA	18
CHRIS07902020 CHRISTOFLE IRIANA OLD FASHION IRIANA	18
CHRIS07902022 CHRISTOFLE IRIANA HIGHBALL IRIANA	18
07945100 CHRISTOFLE GRAPHIK WINE CARAFE/DECANTER	2
FLATWARE (SAMBONET CONTOUR)	
SAMB52701_01 TABLE SPOON	22
SAMB52701_08 TABLE FORK	22
SAMB52701_14 TABLE KNIFE S.H.	22
SAMB52701_27 DESSERT KNIFE S.H.	22
SAMB52701_26 - DESSERT FORK	22
SAMB52701_36 TEA/COFFEE SPOON	14
SAMB52701_37 MOKA SPOON	14
SAMB52701_44 SERVING SPOON	2
SAMB52701_45 FORK SERVING	2
SAMB52701_58 CAKE SERVER	1
HOLLOWARE	
CHRIS04174180 ALBI TEAPOT	1
CHRIS04174325 ALBI CREAMER	1
CHRIS04174260 ALBI SUGAR BOWL	2
CHRIS03902110 ALBI TRAY, 20 X 16	2
04224595 CHRISTOFLE VERTIGO CAVIAR SET 5 1/2" / 14 CM	2
F521221-01 ERCUIS BEARN / now REGARDS SALT MILL SILVERPLATE 3.5" / 8 CM	3
F521220-01 ERCUIS BEARN / now REGARDS PEPPER MILL SILVERPLATE 3.5" / 8 CM	3
BERNARDAUD FUSION WHITE - JI QING	
5100-5278 BERNARDAUD WHITE RECTANGULAR SUSHI PLATE 11" X 5"	12
5100-BERNARDAUD CAVIAR TRAY & CUP 12" X 5"	8
3008-13101112 BERNARDAUD WHITE ASIAN CUP WITH LID & SAUCER 3 1/4" X 2"	12
3008-1307 BERNARDAUD ASIAN SPOON	12
BERNARDAUD WHITE SMALL SOYA BOWL	12
50303014 ROBBE & BERKING JAPANESE CHOPSTICKS KYUSHU PAIR (SET OF 2)	12
50303019 ROBBE & BERKING CHOPSTICK REST	12

Global 7500



Aircraft & Customer Support Description Schedule A Rev 8

Document Release Date: 2021-01-22

BOMBARDIER

TABLE OF CONTENTS

1.	INTRODUCTION.....	2
1.1	Scope.....	2
1.2	Certification and Operational Capability.....	2
2.	GENERAL DESCRIPTION.....	3
2.1	Overall Specifications.....	3
2.2	Weight and Balance.....	3
2.3	Interior Dimensions.....	4
2.4	Exterior Dimensions.....	5
2.5	Performance.....	6
2.6	Structural Design.....	6
2.7	Landing Gear.....	6
2.8	Power Plant & Auxiliary Power Unit.....	6
3.	SYSTEMS.....	7
3.1	Pressurization, Environmental Control and Oxygen System.....	7
3.2	Electrical System.....	7
3.3	Fire Protection.....	7
3.4	Flight Controls.....	7
3.5	Fuel System.....	7
3.6	Hydraulic System.....	8
3.7	Ice and Rain Protection.....	8
3.8	Lighting System.....	8
3.9	Maintenance System.....	8
4.	INSTRUMENTATION AND AVIONICS.....	9
4.1	Typical Instrument Panels.....	9
4.2	General Description.....	10
4.3	Auto Flight.....	10
4.4	Communications.....	10
4.5	Indicating / Recording Systems.....	10
4.6	Navigation.....	10
5.	EQUIPMENT AND FURNISHINGS.....	12
5.1	Cabin configuration.....	12
5.2	Flight Deck.....	12
5.3	Soundproofing.....	12
5.4	Cabin Communications & Entertainment.....	12
5.5	Entry Area.....	13
5.6	Galley Features.....	14
5.7	Main Cabin Features.....	15
5.8	Lavatory, Water System and Overboard Toilet Service.....	17
5.9	Baggage Compartment.....	18
5.10	Exterior.....	18
5.11	Emergency Equipment.....	18
5.12	Loose Equipment.....	19

6.	CUSTOMER SUPPORT SERVICES.....	20
6.1	Inspection and Acceptance Procedures	20
6.2	Entry-into-Service Support.....	20
6.3	Training	20
6.4	Technical Publications.....	21
6.5	Technical Support - SmartFix™ Plus Troubleshooting Tool.....	22
6.6	Smart Services.....	22
6.7	Smart Link Plus Services.....	22
6.8	Computer Maintenance Management Services (CMMS).....	22
6.9	Portable Maintenance Access Terminal (PMAT).....	23
6.10	Medical Assistance Program	23
7.	WARRANTY.....	24
8.	PATENT AND TRADEMARK PROTECTION	26
9.	CONSULTANTS.....	27

ACRONYMS

ADF	Automatic Direction Finder
ADS	Airworthiness Directives
ADS-B	Automatic Dependent Surveillance – Broadcast
AFCS	Automatic Flight Control Systems
AMLCD	Active Matrix Liquid Crystal Displays
AMM	Aircraft Maintenance Manual
AMTOSS	Aircraft Maintenance Task Oriented Support System
APR	Automatic Performance Reserve
APU	Auxiliary Power Unit
AVOD	Audio Video on Demand
BOW	Basic Operating Weight
BRNAV	Basic Area Navigation
BTU	British Thermal Unit per point of fuel
CAAC	Civil Aviation Administration of China
CAS	Crew Alerting System
CAT I	Category I flight conditions
CG	Center of Gravity
CMMS	Computer Maintenance Management System
CVR	Cockpit Voice Recorder
DC	Direct Current
DME	Distance Measuring Equipment
DWE	Delivery Weight Empty
EASA	European Aviation Safety Agency
ECS	Environmental Control System
EFB	Electronic Flight Bag
EFIS	Electronic Flight Instrument System
EICAS	Engine Indication and Crew Awareness System
EIS	Entry Into Service
ELT	Emergency Locator Transmitter
FAA	Federal Aviation Administration
FAR	Federal Aviation Regulation
FDR	Flight Data Recorder
FMS	Flight Management System
FOD	Foreign Object Damage
GFI	Ground Fault Interrupter
GNSS	Global Navigation Satellite System
GPS	Global Positioning System
HF	High Frequency
ICAO	International Civil Aviation Organization
IFE	In-Flight Entertainment
IFR	Instrument Flight Rules
IRS	Inertial Reference Systems
ISA	International Standard Atmosphere
ISI	Integrated Standby Instrument
JAR	Joint Aviation Authorities
ktas	Knots True Airspeed
LED	Light Emitting Diodes
LH	Left Hand
LPV	Localizer Performance Vertical
MAC	Mean Aerodynamic Chord
MDC	Maintenance Diagnostic Computer
MDL	Master Document List
MLG	Main Landing Gear
MLW	Maximum Landing Weight
MNPS	Minimum Navigational Performance Standards
MTOW	Maximum Take Off Weight
NAT	North Atlantic Tracks
NBAA	National Business Aviation Association
NLG	Nose Landing Gear
NM	Nautical Mile
OEC	Optional Equipment Catalog

OJT	On the Job Training
PBE	Portable Breathing Equipment
PCU	Power-Control Unit
P-RNAV	Precision Area Navigation
RH	Right Hand
RNP	Required Navigation Performance
RVSM	Reduced Vertical Separation Minimum
SBAS	Satellite Based Augmentation System
SBs	Service Bulletins
SELCAL	Selective Calling
SIPC	Supplemental Illustrated Parts Catalog
SL	Sea Level
SMM	Supplemental Maintenance Manual
SPM	Safety Performance Measurement
STC	Supplemental Type Certificate
SVS	Synthetic Vision System
TAWS	Terrain Awareness and Warning System
TCAS	Traffic Collision Avoidance System
TCCA	Transport Canada Civil Aviation
TSO	Technical Standard Orders
US-RNAV	US Terminal Area Navigation
VFR	Visual Flight Rules
VHF	Very High Frequency

1. INTRODUCTION

1.1 Scope

For the purpose of the present document, the "Aircraft" shall mean: the Aircraft as defined in the Aircraft Purchase Agreement, including its power plant, systems and equipment.

Also included is the Seller's interior completion, describing the outfitting standards and general requirements used by the Seller in the work to be performed for the fabrication and installation of a Global 7500 standard interior, comprised of the interior, mechanical, electrical and avionics equipment and exterior paint application.

In addition, this document describes the Customer Support Services that are provided to the Buyer as part of the sale of the Aircraft, including Warranty, technical publications, crew training and the maintenance management system.

The Aircraft and its manufacture, may be subject to changes during the course of the design, manufacture and certification process or as a result of any legislation, act, order, directive or regulation, or any interpretation thereof, of or by any government or governmental body. If such changes take place and apply to all aircraft in general or to all aircraft of the same category as the Aircraft and are effective after the date of the Agreement but before Delivery Time, Buyer shall pay Seller's reasonable cost for such changes. If the incorporation of such changes delays the delivery of the Aircraft, that delay shall be considered an Excusable Delay under the Agreement.

For the purpose of the present document, "Document Effectivity" shall refer to the first Aircraft configuration subsequent to the specified Effectivity date that meets this document description.

1.2 Certification and Operational Capability

The Aircraft is certified to the Canadian Airworthiness Manual Chapter 525 – *Transport Category Aeroplanes*, (AWM 525) by Transport Canada Civil Aviation (TCCA) and additional requirements as defined in TCCA Type Certificate Data Sheet (TCDS) A-177 and Title 14, Code of Federal Regulations Part 25 – *Airworthiness Standards: Transport Category Airplanes* (14 CFR 25) and additional requirements

by the American Federal Aviation Administration (FAA) as defined within FAA TCDS T00003NY.

The Aircraft is certified for operations in day and night, under VFR and IFR conditions, for CAT I approaches, flight into known icing conditions and is compliant with RVSM airworthiness requirements in accordance with FAA AC 91-85A and JAA TGL6, Rev 1.

This Aircraft is capable and meets the requirements of:

- Basic Area Navigation (BRNAV) / Required Navigation Performance (RNP) 5, in accordance with FAA AC 90-96A and EASA AMC20-4;
- RNP-10, in accordance with ICAO DOC 9613 PBN Volume II, Part B, Chapter 1, FAA AC 90-105A, and AMC 20-12;
- GPS primary means navigation in oceanic and remote areas of operation in accordance with FAA AC 20-138D and EASA AMC 20-28;
- Precision Area Navigation (P-RNAV) in accordance with JAA TGL10 and FAA AC 90-96;
- US Terminal Area Navigation (US-RNAV) in accordance with FAA AC 90-100A;
- Vertical Navigation operations in accordance with FAA AC 20-138D and EASA AMC20-27;
- RNP-4 and RNP-2, in accordance with ICAO Doc 9613 PBN Volume II, Part C, Chapter 1 and FAA AC 20-138D and AC 90-105A;
- Basic RNP-1, in accordance with ICAO Doc 9613 PBN Volume II, Part C, Chapter 3 and FAA AC 20-138D, FAA AC 90-105A for FAA RNP-1 (Terminal) operations;
- RNP APCH, in accordance with ICAO Doc 9613 PBN Volume II, Part C, Chapter 5, and FAA AC 90-105A for FAA RNP instrument approach with BARO-VNAV and EASA AMC20-27A for RNP APCH with BARO-VNAV;

Unless otherwise agreed to between Seller and Buyer, Seller will provide Buyer with a TCCA Certificate of Airworthiness or a TCCA Certificate of Airworthiness for Export, which will permit the Aircraft to qualify for an FAA Standard Airworthiness Certificate.

Buyer is responsible for complying with the rules, laws and regulations of the jurisdictions in which it operates the Aircraft.

Seller shall not be obligated to obtain any further certificate or approval as part of this Agreement.

2. GENERAL DESCRIPTION

The Aircraft is a pressurized, fixed low-wing monoplane capable of achieving a nominal 7,700 NM mission range while carrying 8 passengers under certain conditions described in the sections below.

2.1 Overall Specifications

Accommodation ⁽¹⁾	
Crew (minimum)	2
Passengers (std accomodation)	17
Engines	
Number	2
Make / Model	GE / Passport
Thrust Normal Take-Off (Flat rated to ISA + 15°C, SL)	18,920 lbf (84.16 kN)
Maintenance Program	On Condition
Pressurization	
Maximum Altitude with Sea Level Cabin Pressure	30,125 ft (9,182 m)
Cabin Altitude at Maximum Altitude	5,680 ft (1,731 m)
Auxiliary Power Unit	
Make / Model	Safran Power Units / SPU300[BA]
Maximum Operational Altitude	51,000 ft (15,545 m)

Note:

1. Flight observer seat not included in count.


2.2 Weight and Balance

Design Weights and Capacities ⁽¹⁾⁽²⁾	
A- Maximum Ramp Weight	115,100 lb (52,208 kg)
B- Maximum Takoff Weight	114,850 lb (52,095 kg)
C- Maximum Landing Weight	87,600 lb (39,735 kg)
D- Maximum Zero Fuel Weight	67,500 lb (30,617 kg)
E- Basic Operating Weight (BOW) ⁽²⁾	61,700 lb (27,987 kg)
F- Maximum Fuel Weight ⁽³⁾	51,510 lb (23,365 kg)
Maximum Payload (D-E)	5,800 lb (2,631 kg)
Payload with Maximum Fuel (A-E-F)	1,890 lb (857.3 kg)
Fuel with Maximum Payload (A-D)	47,600 lb (21,591 kg)

Notes:



1. The Aircraft will be weighed prior to final Delivery. A weight and balance report including loading charts and an equipment listing is provided as required by regulations.
2. Basic Operating Weight (BOW) and corresponding maximum payload and payload with maximum fuel are provided for illustration purposes only. The BOW assumes a Delivery Weight Empty (DWE) of 59,842 lb (27,144 kg) $\pm$ 2% and 1,858 lb (842 kg) of baseline operating items (such as engine oil, unusable fuel, manuals, galley and cabin supplies, lifevests, water service and toilet charge, four (4) crew and crew baggage). The weight is exclusive of customer selected options and any adverse weight impacts incorporated into the production configuration from Service Bulletins (SBs) and Airworthiness Directives (ADs).
3. The Maximum Fuel Weight is based on a fuel density of 6.7 lb/US gal (0.803 kg/l). The resolution of the fuel system indication is in 50 lb (25 kg) increments.

2.3 Interior Dimensions

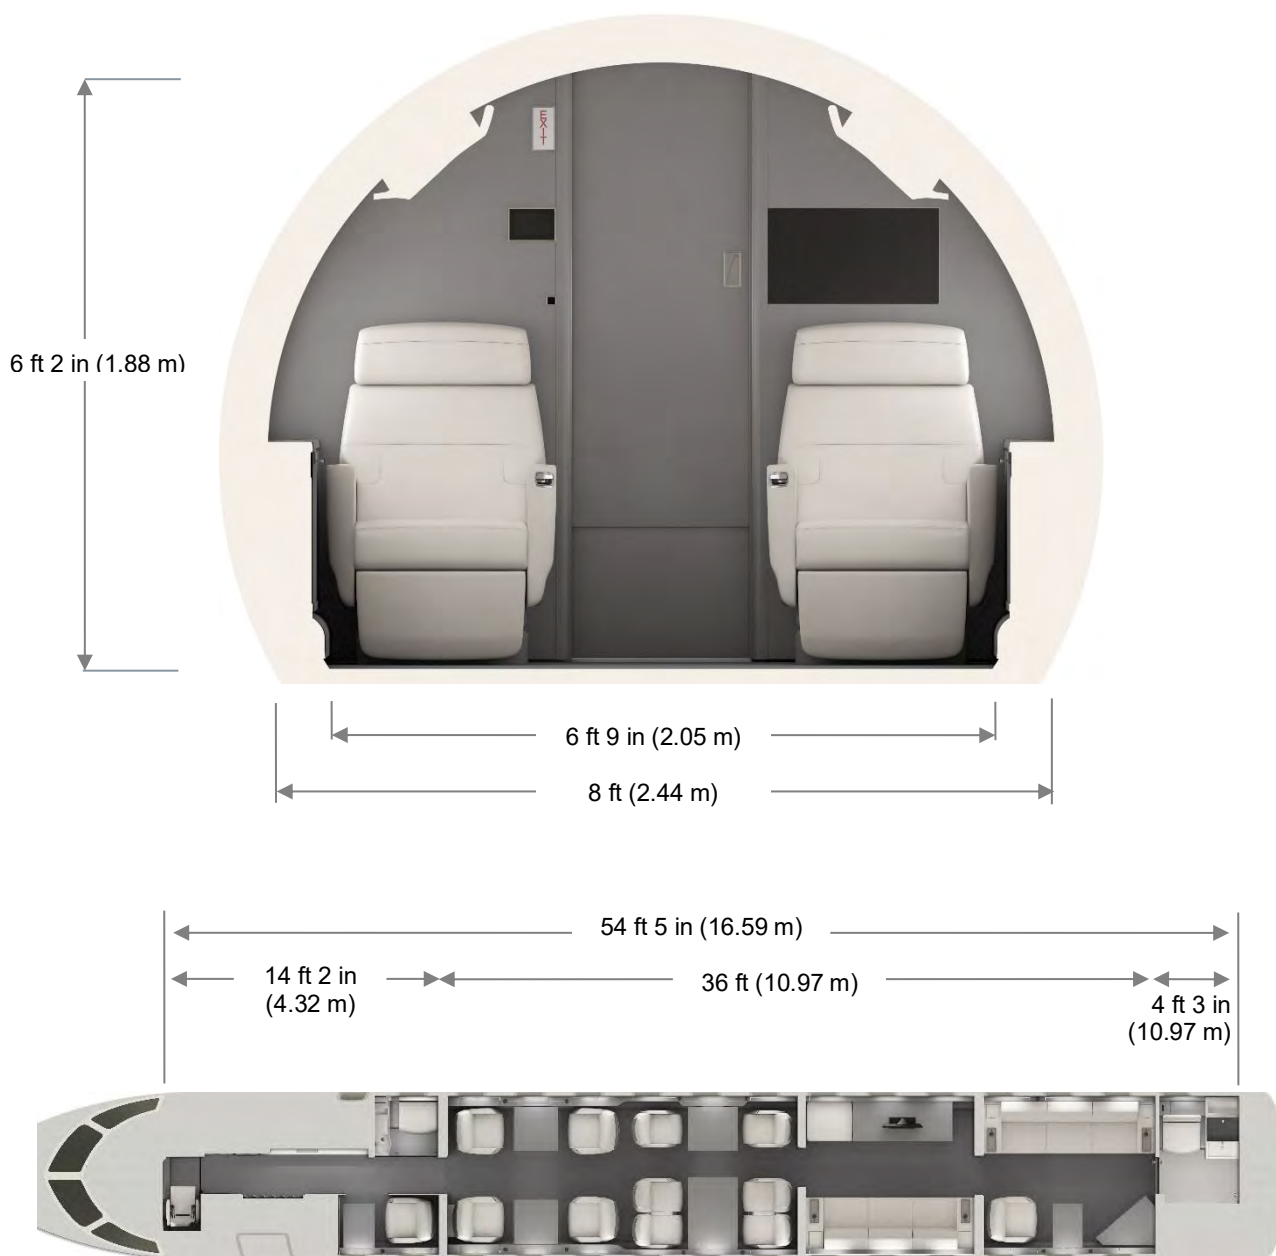

Note: Approximate dimensions are shown. For illustration purposes only.

2.4 Exterior Dimensions

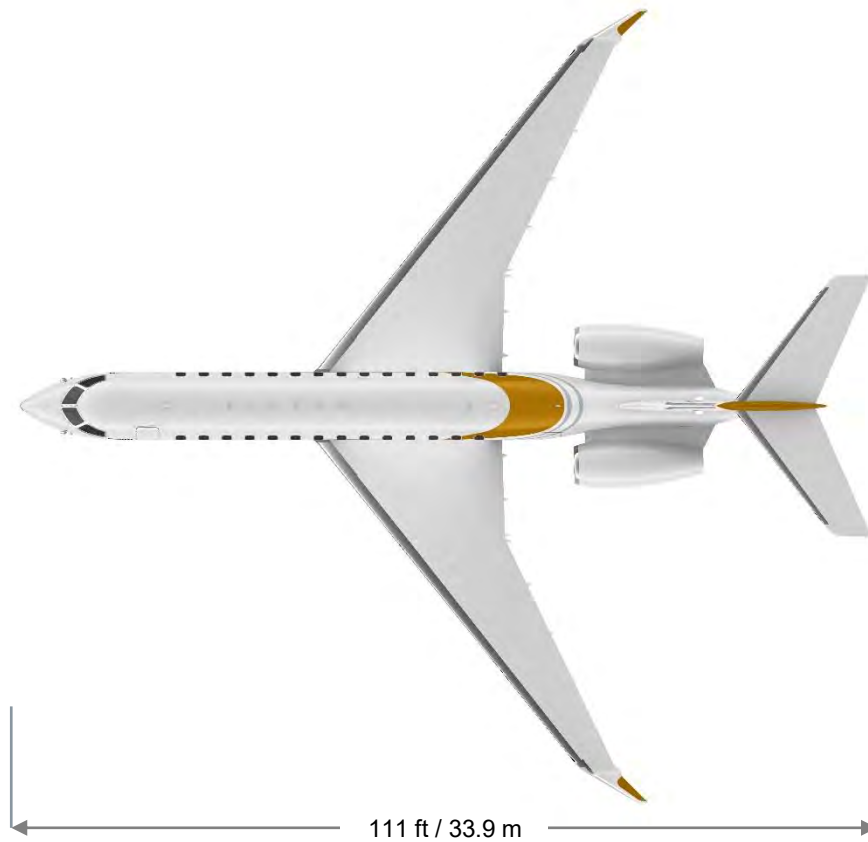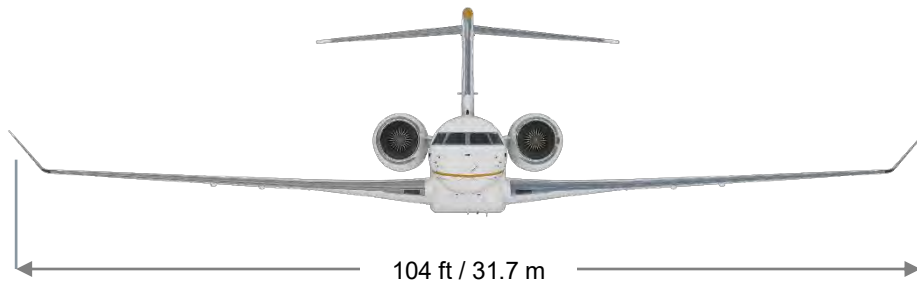

Note: Approximate dimensions are shown. For illustration purposes only.

2.5 Performance

All performance data are based on a standard Aircraft and a standard (ISA) conditions day. Options, Aircraft customization and/or foreign certification requirements requested by Buyer may result in a change in performance.

Take-Off ($\pm 3\%$)¹	
Take-Off Field Length (SL, ISA, MTOW)	5,760 ft (1,756 m)
Landing ($\pm 3\%$)¹	
Landing Distance (SL, MLW)	2,680 ft (817 m)
Cruise Performance	
High Speed Cruise	M 0.90 (516 ktas)
Typical Cruise Speed	M 0.85 (488 ktas)
Maximum Certified Operating Altitude	51,000 ft (15,545 m)
Initial Cruise Altitude after MTOW Departure	43,000 ft (13,106 m)
Noise	
	Meets Chapter 14 / Stage 5 limit ²
Range ($\pm 5\%$)³ at cruise speed of M 0.85	
At 8 Passengers (1,800 lb payload)	7,700 NM (14,260 km)

Notes:

1. Take-off and landing performance are based on a hard dry surface with zero slope, zero wind and the most favorable use of brakes, flaps, spoilers, landing gear and thrust. Take-off distance is without allowances for cabin pressurization, air conditioning and ice protection. Thrust reversers are not used.
2. Certified to ICAO Chapter 4, as well as Far 36 Stage 4, and satisfies the upcoming Chapter 14 as published by ICAO in Annex 16 Volume 1 in July 2014 and Stage 5 as published by FAA in Part 36 in October 2017.
3. Range is provided for illustration purposes only and is determined by using NBAA range format with IFR fuel reserves in still air, based on a BOW (as further described in Section 2) with an assumption of 225 lb per passenger. Allowances are made for normal bleed air requirements for cabin pressurization and air conditioning (APU off). No allowances are made for maneuver, wind and ice protection. The center of gravity (CG) location is assumed to be at 35% Mean Aerodynamic Chord (MAC). The maximum Take-Off fuel allowed is considered not being limited by airport special procedures, field length and CG. The performance is based on the use of fuel with an average lower heating value of 18,550 BTU/lb (43.147MJ/kg) and a density of 6.7 lb/US gal (0.803 kg/l).

2.6 Structural Design

The Aircraft structure is primarily fabricated from aluminum alloy but also includes alloy steels, stainless steel, titanium, composites.

The fuselage is composed of semi-monocoque aluminum alloy construction comprised of skins, frames and stringers. Areas adjacent to or affected by high heat sources are constructed of fire-resistant or fireproof materials as appropriate.

The wing is a swept back unit mounted under the fuselage and consists of aluminum alloys skins, ribs spars and stringers.

The empennage is of a "T" configuration comprising of an incidence adjustable horizontal stabilizer with elevators mounted at the top of a vertical stabilizer and rudder. It is of a metal and composite construction.

2.7 Landing Gear

The Aircraft is equipped with a fully retractable tricycle landing gear. The landing gear extension and retraction system is electrically controlled and hydraulically actuated. The system features free-fall capability as a backup.

2.8 Power Plant & Auxiliary Power Unit

Two (2) GE Passport high bypass turbofan engines power the Aircraft. Each engine produces 18,920 lbs of thrust (ISA + 15°C) at sea level.

The integrated power plant features electrically controlled and hydraulically operated target-type thrust reversers.

A Safran SPU300[BA] gas turbine Auxiliary Power Unit (APU) is installed in the aft fuselage area providing bleed air and shaft power on the ground and in flight.

3. SYSTEMS

3.1 *Pressurization, Environmental Control and Oxygen System*

The bleed air system provides bleed air to control the ECS, wing anti-ice, and engine starting. The ECS performs the functions of pressurization, air conditioning and ventilation/cooling for the avionics equipment.

The air conditioning system supplies air to the cabin and cockpit areas for heating, cooling, ventilation and pressurization. The Aircraft has four (4) independently controlled temperature zones; (1) for the entry area, two (2) dedicated for the main cabin and one (1) for the cockpit.

The system includes automatic controls that monitor the interior to ensure proper cabin pressure is maintained throughout the flight.

The oxygen system supplies oxygen to the crew and the passengers in case of a cabin depressurization, smoke/fire contamination, or other emergency.

The crew oxygen system includes quick-donning demand type masks with mask-mounted regulators provided for the pilot, copilot and flight observer.

An independent passenger oxygen system is installed in the Aircraft.

3.2 *Electrical System*

The Aircraft is equipped with an electrical system, which uses AC as a primary source of electrical power. Primary electrical power is provided by two (2) AC variable frequency generators and is distributed and controlled from the two (2) AC power distribution units. Electrical power can also be provided by a generator coupled to the APU. DC electrical power is provided by three (3) transformer rectifier units powered from the AC power sources. In case of emergency, electrical power is provided by a Ram Air Turbine (RAT) and by two (2) batteries.

On the ground, electrical power can be supplied through an external power receptacle.

3.3 *Fire Protection*

A fire detection and warning system with fault discrimination is installed, with continuous element fire detectors located in each engine nacelle and in the APU compartment. A wheel well overheat system warns of an overheat condition in either of the main wheel wells.

An electronic type smoke detector system is installed in the baggage compartment area, lavatories and avionics equipment area, and is monitored by the flight crew via the Engine Indication and Crew Alerting System (EICAS).

A fire extinguishing system is installed for the engines, APU and baggage bay.

Each fire extinguisher bottle is fitted with a low pressure switch, which provides a caution indication when pressure is lost because of discharge or leakage.

3.4 *Flight Controls*

The fully fly-by-wire (FBW) flight control system includes the primary and secondary flight controls. The primary flight controls consist of the ailerons, multifunction spoilers, elevators, and rudder. The trim controls include the horizontal stabilizer, as well as the use of rudder and ailerons. Flight spoilers are used for roll assist, airspeed reduction, in-flight lift dumping and ground lift dumping.

The secondary flight controls consist of the horizontal stabilizer, high lift devices, speed brakes and ground spoilers. Ground spoilers are used for ground lift dumping only.

The FBW system provides full flight envelope protection. The proprietary flight control logic is designed with "speed stable" pitch control, achieved through an independent sidestick configuration incorporating mechanical resistance and dampening motors.

3.5 *Fuel System*

Fuel tanks are installed in the wing and fuselage. Wing tank design restricts fuel sloshing, limiting center of gravity shifts with changes in Aircraft attitude.

Aircraft refueling and de-fueling is provided via a single point pressure refuel/defuel station. Gravity refuel is also available via gravity refuel ports installed on each wing. The system permits suction defueling.

The refuel subsystem contains an external refuel/defuel control panel as well as a virtual refuel/defuel panel in the cockpit.

3.6 *Hydraulic System*

The hydraulic system provides power to operate the landing gear, brakes, nose wheel steering, thrust reversers and spoilers. Three (3) fully independent hydraulic systems provide power to operate the flight control surfaces, main and nose landing gear, main landing gear downlock assist actuators, brakes, nose wheel steering, and main and nose landing gear doors. There is no connection between any of the systems, such that a fluid leak or contamination in one system does not affect the others.

In case of emergency, a RAT system incorporates a hydraulic pump, which provides essential power to the systems.

3.7 *Ice and Rain Protection*

The function of the ice and rain protection system is to prevent ice from occurring on some of the components and areas of the Aircraft. Ice detectors alert the flight crew of icing conditions.

The wing leading edges and the engine intake cowls are heated using engine bleed air. The windshields, cockpit side-windows, air data probes and temperature probes are heated using electrical power.

3.8 *Lighting System*

The lighting system provides interior and exterior illumination of the Aircraft. In addition, lights provide information and guidance to passengers in normal and emergency situations. The lighting system includes:

- Flight compartment lighting;
- Passenger compartment lighting;
- Service compartment lighting;
- Exterior lighting (landing, taxi, anti-collision, navigation and strobe lights);
- Emergency lighting; and
- Service and maintenance lighting.

3.9 *Maintenance System*

An Aircraft Health Management System (AHMS) is provided and interfaces with the avionics components and the Aircraft systems to continuously monitor their health status either on ground or during flight. This system allows for On-Aircraft Data Visualization via a Portable Maintenance Access Terminal (PMAT) of both, recorded and live aircraft system data.

An onboard maintenance system (OMS) is provided and interfaces with the avionics components and the Aircraft systems to continuously monitor their status either on ground or during flight. Report status and maintenance data is available in the cockpit, via a PMAT and for download by maintenance personnel.

4. INSTRUMENTATION AND AVIONICS

4.1 Typical Instrument Panels



Note: For illustration purposes only

4.2 General Description

The Aircraft is equipped with the Bombardier Vision¹ flight deck avionics suite, complete with four (4) 14"x11" landscape active matrix liquid crystal displays (AMLCS). The window size allows a 50 / 50 vertical split screen view configuration, offering multifunction windows. Each of the displays can be utilized in a manner that allows multi-tasking of the display surface area. These displays are horizontally aligned, for better crew resource management. The cockpit architecture is designed to support dispatch without the need for departure, arrival, approach, or airport paper charts aboard the flight deck.

4.3 Auto Flight

A dual three-axis Automatic Flight Control Systems (AFCS) is provided with pitch and roll channels and an independent linear actuator for the yaw axis. The AFCS includes computations for

- Flight guidance;
- Autothrottle;
- Autopilot;
- Yaw damper; and
- Automatic pitch trim.

The flight director modes are selected on the Flight Control Panel (FCP) or via the take-off go-around switches on the throttles.

Each AFCS includes an automatic control subsystem, consisting of thrust and speed computations that drive an integrated throttle quadrant assembly.

The flight director modes include Emergency Descent Mode which will automatically turn and dive the Aircraft down to 15,000 ft when the system senses pressurization issues and pilots do not take action within a specific amount of time.

4.4 Communications

The communications system provides equipment designed to supply communication in the Aircraft, between different aircraft, and between the Aircraft and ground stations.

The Aircraft communication system includes:

- Three (3) VHF communication radios;
- Two (2) HF transceivers;
- One (1) dual SELCAL system capable of monitoring three (3) VHF and two (2) HF radios;

- One (1) Iridium Satellite Communication System with two (2) voice channels and one (1) data channel that supports safety services and meets the requirements of Future Air Navigation System (FANS 1/A+) including Airline Operational Control (AOC), Air Traffic Services (ATS), Facilities Notifications (AFN), Automatic Dependent Surveillance - Contact (ADS-C) and Controller Pilot Datalink Communication (CPDLC); and
- One (1) dual channel interphone system with hand-held microphones and individual controls for pilot, co-pilot and flight observer seat.

4.5 Indicating / Recording Systems

The Indicating and Recording system consists of components that record and display critical aircraft information and system operation and includes:

- Electronic Flight Instrument System (EFIS), including Electronic Checklist (ECL) and dual synchronized digital GPS clocks;
- Engine Indication and Crew Awareness System (EICAS);
- Cockpit Voice Recorder (CVR), supporting the recording of datalink communications with a recorder independent power supply;
- Flight Data Recorder (FDR) with an underwater location device; and
- Emergency Locator Transmitter (ELT).

Automatic display reversion reduces workload and ensures that the primary information is always available to the crew in all display configurations.

4.6 Navigation

The navigation system calculates and illustrates the Aircraft's attitude, altitude, and position relative to the surface of the earth. Present position and future position are shown on the Primary Flight Displays (PFD). The system includes:

- Two (2) Integrated Flight Information System (IFIS)² with dual File Server Unit;
- One (1) Head-Up Display (HUD) System;
- One (1) Enhanced Vision System (EVS);
- One (1) Synthetic Vision System (SVS);
- One (1) Electronic Integrated Standby Instrument (ISI);
- One (1) Air Data System (ADS) composed of four (4) Air Data Smart Probes (ADSP);
- One (1) Weather Radar;

¹ Bombardier Vision is a trademark of Bombardier Inc. or its affiliates

² Service subscription to updating charts is not included


- Three (3) Inertial Reference Systems (IRS);
- Two (2) GPS WAAS receivers;
- Two (2) VHF navigation receivers;
- Two (2) ADF receivers;
- Two (2) DME transceivers;
- One (1) Traffic Surveillance System and One (1) standalone Transponder capable of:
 - o Dual transponder functionality;
 - o TCAS II change 7.1; and
 - o ADS-B Out.
- Two (2) Radio Altimeter systems;
- One (1) Terrain Awareness and Warning System (TAWS); and
- Three (3) Flight Management Systems (FMS).

5. EQUIPMENT AND FURNISHINGS

All components and materials are selected for quality, durability and ease of maintenance with weight as a consideration. Seller reserves the right to substitute components of similar quality should a lack of availability be documented by the chosen vendor. Seller is not responsible for variations in dye lots of paint or fabrics or variations in grain and color of natural wood veneers, leather or other coverings from Buyer approved sample, due to the natural or inherent properties thereof.

Buyer may choose from a large selection of pre-qualified materials, fabrics, carpets, colors, patterns and veneers. Some materials made available exceed the standard material budget and baseline weight and if selected, will expose Buyer to additional charges and weight.

All interior instructions are placarded in the English language.

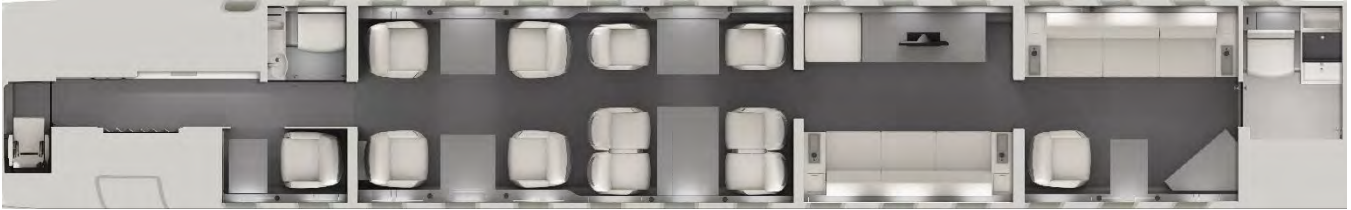

Note: Top view of standard cabin configuration. For illustration purposes only

5.1 Cabin configuration

In addition to the two (2) pilots in the flight deck, the standard cabin accommodates one (1) crew in the entrance area cockpit observer seat, one (1) crew in the crew area and seventeen (17) passengers in the cabin. The standard configuration is a non-smoking cabin and all seating positions are certified for taxi, take-off and landing. The standard cabin is certified for FAR Part 91 operations. Operational approval for FAR Part 135 operations for flights over ten (10) and up to twelve (12) hours and for flights exceeding twelve (12) hours of duration requires additional optional equipment.

5.2 Flight Deck

The flight crew area has thermal and acoustic insulation and is fully lined and furnished. The following items are included in the standard cockpit configuration:

- Reclining and adjustable pilot and co-pilot sheepskin covered seats;
- Two (2) sun filter type roller shades;
- Storage for flight handbooks and maps adjacent to each pilot;
- Two (2) universal Personal Electronic Device (PED) outlets;

- One (1) grab bar, on the central headliner;
- One (1) temperature sensor;
- Two (2) tablet holders with charging provisions;
- Two (2) pull-out tray tables; and
- One (1) dual channel Iridium wired handset.

5.3 Soundproofing

The Aircraft is soundproofed utilizing vibro-acoustic materials and techniques developed by the Seller. Sound is measured at various passenger positions in the cabin and the linear average is calculated to determine the average cabin sound levels. The Aircraft is surveyed fully furnished and in accordance with Seller's established acoustic flight test procedures. Final sound levels depend on selected cabin floorplan, finishes, trim and selected options.

5.4 Cabin Communications & Entertainment

The cabin communications and entertainment system includes:

- A High Speed satellite communication system providing worldwide connectivity³ that supports high-bandwidth passenger activities, including streaming and video conferencing;

³ Exceptions may apply. Service subscriptions not included. Connectivity speed can vary based on service provider capacity. Seller does not guarantee and is not responsible for actual

service availability, terms and conditions or coverage fluctuation. Refer to service provider for details.

- A cabin management system (CMS) that provides interfaces with Aircraft and cabin systems and distributes data and commands between the Aircraft, avionics, cabin systems and the In-Flight Entertainment (IFE) portion of the CMS;
- Two (2) wireless access points to connect smart phones and tablets (connected to CMS);
- One (1) In-Flight Entertainment (IFE) system including worldwide maps, audio cabin briefing, and display of the view from six (6) external cameras as well as a library for locally stored films and music;
- Two (2) Media Centre Units (MCU) that contain a hard disk and a Blu-ray CD/DVD player (one (1) in overhead compartment of crew rest area and one (1) in credenza in zone 3);
- One (1) 24" HD monitor mounted on the RHS aft facing bulkhead in zone 1;
- One (1) 32" HD monitor on the credenza in zone 3;
- One (1) HDMI port in zone 1;
- One (1) HDMI port in the credenza in zone 3;
- USB 3.0 and headphone connectivity ports spread throughout the cabin;
- A Bluetooth module that can output to the speakers and/or headsets and that can receive input from the passenger PED's; and
- An audio system comprising of fourteen (14) speakers, one (1) soundbar and three (3) subwoofers connected to the audio/video media system.

5.5 Entry Area

The entry area contains the main entry door, the entrance enclosure, a permanent side-tracking cockpit observer seat, and the crew area on the left hand side (LHS), and the galley and the forward

lavatory on the right hand side (RHS). One (1) universal PED outlet is installed in the cockpit observer seat console.

The left-hand entrance enclosure is used for general storage, emergency equipment and operating equipment.

The left-hand entrance enclosure includes:

- Stowage provisions for various items (umbrellas, passenger briefing cards, emergency equipment, and life raft);
- An acoustical curtain stowed behind a hinged door;
- A lockable compartment; and
- One (1) universal PED outlet.

A crew rest area is installed on the LHS between the main entry door and the LH forward bulkhead. The crew rest area includes:

- A privacy curtain;
- One (1) single seat facing forward;
- A sideedge plug-in table;
- An ottoman with sliding top that houses one (1) Ethernet/USB jack module for maintenance purposes;
- Storage above and below the ottoman and in the overhead storage area;
- A temperature sensor in forward compartment;
- One (1) dual channel Iridium wired handset; and
- A sideedge incorporating a storage tray, miscellaneous storage, a Passenger Dial Unit (PDU), a USB port, a headphone port, and one (1) universal PED outlet.

The overhead storage compartment above the crew rest area incorporates the following:

- A compartment that can house customer-furnished entertainment equipment;
- One (1) MCU; and
- One (1) universal PED outlet.




Note: Elevation view of LHS entry area. For illustration purposes only.

5.6 Galley Features

The galley is installed on the RHS of the Aircraft and includes:

- China storage drawers;
- Crystal storage;
- Inserts to accommodate the customer supplied china, crystal and flatware sets;
- The Galley Control Panel, which gives control to all cabin systems;
- One (1) pull-out work surface;
- One (1) steam/convection oven;
- One (1) microwave convection oven;
- One (1) manual fill coffee maker;
- One (1) boiling kettle;
- One (1) air chiller;
- Wine and water storage;
- Three (3) chilled compartments, two (2) shelved units and one drawer, in the forward section of the galley;
- One (1) drawer for soda can storage;
- One (1) stainless ice drawer with divider, and drainage;
- One (1) dirty dish bin drawer;
- Three (3) miscellaneous storage areas (behind bi-fold doors outboard of sink);
- One (1) hot beverage cup storage;
- One (1) waste drawer with a garbage bag retainer ring;
- One (1) Corian countertop, stainless steel sink with strainer, faucet and sink cover with cutting board on reverse side;
- One (1) paper towel holder;
- One (1) drawer above coffee maker; and
- Two (2) universal utility outlets.

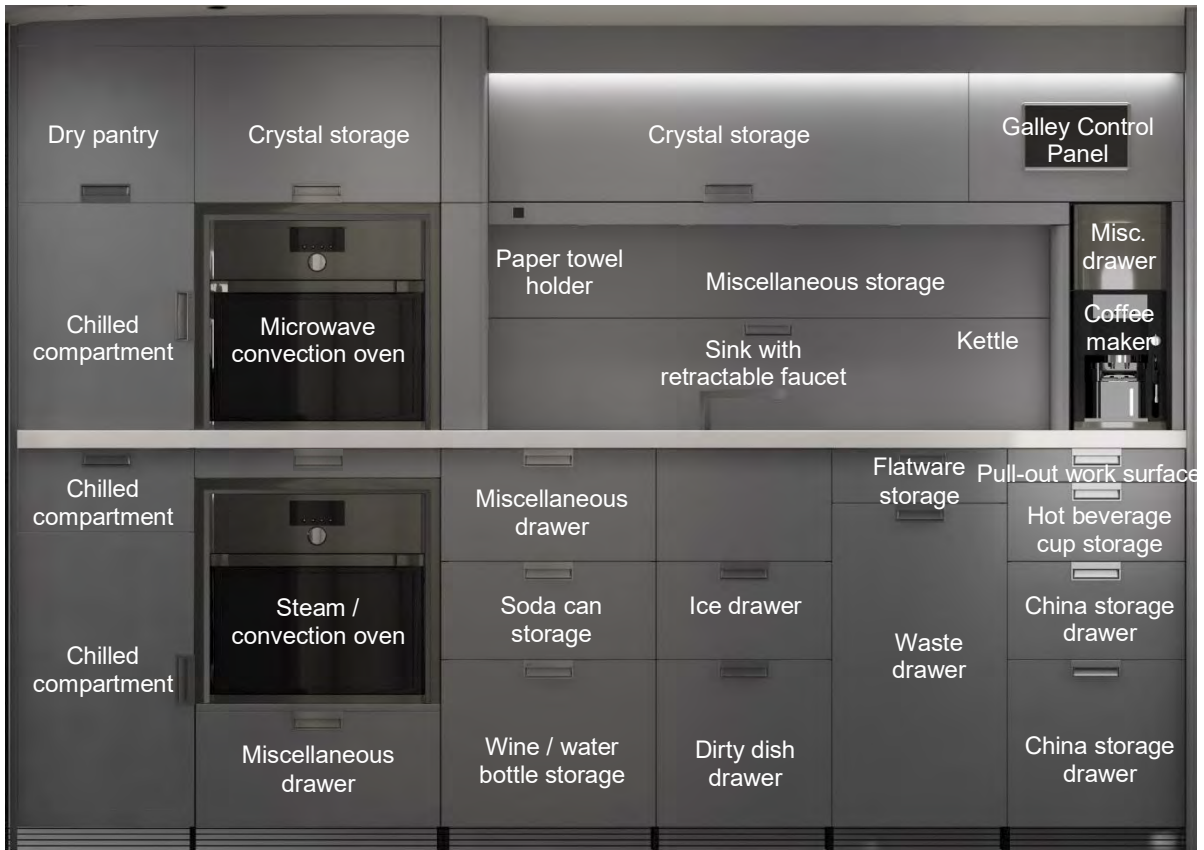

Note: Elevation view of RH side galley area. For illustration purposes only.

5.7 Main Cabin Features

The standard cabin is a 17-passenger layout with four (4) distinct zones. The main cabin has a flat floor throughout and includes the following:

- Two (2) manually operated sliding pocket doors, with electric release, installed in bulkhead of choice;
- An aft lavatory door hinged on RHS of lavatory;
- Fifteen (15) universal PED outlets and one universal utility outlet in the cabin at various locations;
- Two (2) therapeutic oxygen outlets;
- Electric accordion type dual opacity window shades;
- Passenger Service Units (PSU) that incorporate handrails, oxygen masks for each seating position, cabin entertainment system speakers, and lighting;
- Cabin lighting system that includes a general lighting system, which provides optimized illumination for the Aircraft cabin during normal operation (washlights, accent lights, reading/table lights, and compartment lights); it also includes emergency lighting, which provides sufficient illumination for the cabin in case of emergency evacuation; and
- Custom 100% wool carpets for the floor in the entrance area, crew area, cabin, and lavatories. Factory standard materials are used for the cockpit and baggage carpets.


Passenger Cabin - Zone 1

The standard floorplan includes one (1) club seating arrangement in zone 1 RHS and one (1) in zone 1 LHS. Each arrangement includes:

- Two (2) single passenger seats capable of berthing and reclining, tracking and swiveling with legrest, and inboard armrest storage;
- A sideledge incorporating a cup holder tray, miscellaneous storage, a PDU and two (2) universal PED outlets; and
- One (1) bi-fold, dado deployed, pull-out table;

Zone 1 also includes:

- One (1) universal utility outlet in dado between zone 1 and zone 2 on RHS; and
- One (1) temperature sensor on the RHS aft face of the forward cabin bulkhead.

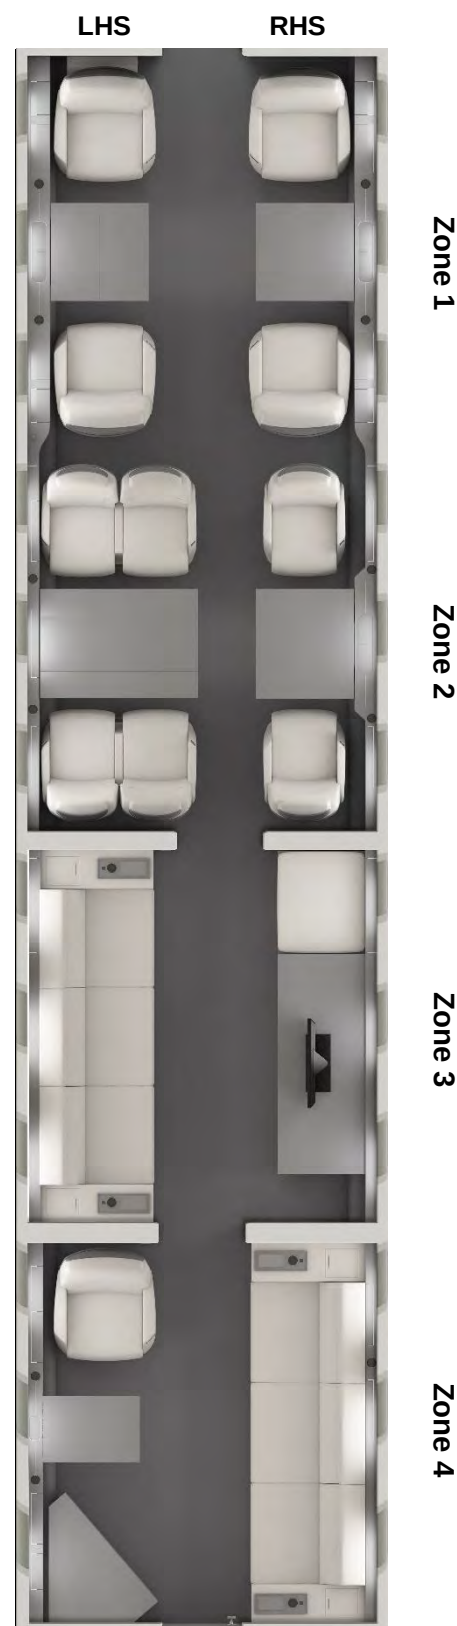

*Note: Top view of standard cabin.
For illustration purposes only.*



*Note: Elevation view of club seating.
For illustration purposes only.*

Passenger Cabin - Zone 2

The conference grouping arrangement in zone 2 RHS includes:

- Two (2) single passenger seats capable of reclining, tracking and swiveling;
- A sideedge incorporating a cup holder tray, soft items storage and a PDU;
- One (1) bi-fold, dado deployed, pull-out table; and
- Two (2) universal PED outlets in dado.

The conference grouping arrangement in zone 2 LHS includes:

- Two (2) double seats capable of reclining and tracking;
- One (1) manually operated Hi-Lo single pedestal table;
- One (1) removable conference table extension stored in the left-hand entrance enclosure;
- One (1) sideedge incorporating soft items storage and a PDU;
- One (1) headphone port and reading light switch on armrests of aisle seats;
- Two (2) universal PED outlets in dado.



*Note: Elevation view of LHS conference grouping.
For illustration purposes only.*



Note: Elevation view of the over-wing emergency exit credenza. For illustration purposes only.

Passenger Cabin - Zone 3

The over-wing emergency exit credenza monument in zone 3 RHS includes:

- One (1) 32" HD monitor and sound bar;
- A Media Bay containing a MCU;
- Storage;
- A life raft; and
- One (1) universal PED outlet.

The 16G 3-place divan and end cabinets arrangement in zone 3 LHS include:

- Full-berthing and intermediate reclined position capability with release handles (Qty: 2);
- An airbag 3-point restraint system;
- Provisions for a sleeping belt; and
- Forward and aft end cabinets with a cup holder tray, a PDU, a universal PED outlet, a tablet storage area and miscellaneous storage.

Note: The divan installed in zone 3 has three (3) taxi, take-off and landing positions.



*Note: Elevation view of divan and divan end cabinets.
For illustration purposes only.*

Passenger Cabin - Zone 4

The 16G 3-place divan and end cabinets arrangement in zone 4 RHS include:

- Full-berthing and intermediate reclined position capability with release handles (Qty: 2);
- An airbag 3-point restraint system;
- Provisions for a sleeping belt;
- Storage space in aft compartment below the divan;
- Forward and aft end cabinets with a cup holder, a PDU, a universal PED outlet, a tablet storage area and miscellaneous storage; and
- One (1) temperature sensor on forward end cabinet of divan.

Note: The divan installed in zone 4 has three (3) taxi, take-off and landing positions.

The arrangement in zone 4 LHS includes:

- One (1) single passenger seat capable of reclining, tracking and swiveling with legrest, and inboard armrest storage;
- A sideledge incorporating a cupholder tray, storage and equipment boxes, a PDU and one Universal PED outlet;
- One (1) bi-fold, dado deployed, pull-out table; and
- One (1) angled cabinet with storage and one (1) universal PED outlet.



Note: Elevation view of angled cabinet and single seat.
For illustration purposes only.

5.8 Lavatory, Water System and Overboard Toilet Service

The Aircraft is equipped with two (2) lavatories.

The forward lavatory is located in the entry area, between the galley and the cabin. The lavatory is closed from the entry area with a hinged door.

The aft lavatory is located between the aft cabin and the baggage compartment. The lavatory is closed off from the cabin with a hinged door and closed from the baggage area with a mirrored hinged door. A mirror is fitted to the baggage bulkhead.

Both lavatories include:

- A vacuum toilet with a hinged padded lid and external water servicing;
- A vanity cabinet with a sink, faucet and amenities (toilet tissue holder, facial tissue dispenser);
- General storage, hand towel holders, and a trash container;
- A smoke detector;
- A drop-down oxygen mask;
- One (1) Passenger Address (PA) speaker;
- An ordinance sign and appropriate lighting; and
- One (1) universal utility outlet.

An aft wardrobe is installed on the LHS of the aft lavatory enclosed by hinged doors and includes:

- One (1) removable coat rod;
- Removable/adjustable shelves;
- Miscellaneous storage; and
- One (1) universal PED outlet.

The Aircraft water tank has a storage capacity of 32 US gallons of usable water.

Water filtration is accomplished through a high quality filter located inside each lavatory and is easily accessible.



Forward lavatory



Aft lavatory

Note: Elevation view of forward and aft lavatory.
For illustration purposes only.

5.9 Baggage Compartment

The baggage compartment is accessible in flight through the lavatory. Access is unlimited for all flight levels up to the certified maximum operating altitude. An external baggage door provides access to load and unload the compartment directly from the exterior of the Aircraft.

The compartment includes:

- One (1) net to prevent bags from falling against baggage hinged door;
- One (1) net to prevent bags from falling against external baggage door and one (1) flip-out exterior baggage door flap protective cover for the outer fuselage skin;
- One (1) net and two shelves between the LHS and RHS avionics racks;
- One (1) net for the storage area inboard of the potable water tank close-out ;
- One (1) net for the RHS storage area;
- One smoke detector;
- One (1) LHS fold-down coat rod; and
- Lighting, one (1) universal utility outlet and external baggage door lock override;

5.10 Exterior

The exterior standard paint is one (1) single color (Matterhorn White), non-metallic solid base coat with two (2) non-metallic stripes shown on fuselage, nacelles, vertical stabilizer/rudder and winglets in up to two colors. Registration markings are applied on the engine nacelles and/or vertical stabilizer and underwing/fuselage surfaces as required by the certifying authorities and country of registration. Cabin window surrounds are painted to match fuselage color.

The inside of the following is painted to match the adjacent exterior color:

- Main entrance door and the baggage door edges and frames;
- The airstair at the main entrance;
- All hinged service door panels, inside of all modified fairing and compartments; and
- Main and nose landing gear doors (5) and the main wheel well doors (2).

The following edges and surfaces are polished:

- The original bright work including the leading edges of the horizontal and vertical stabilizer, wings, slats airstream exposed surfaces and winglets, and engine intake cowl and pylon;
- Cockpit windshield retainers including fastener heads;

- Surround of the main door and baggage door handles;
- Aft equipment bay door handle;
- Main entrance door tread plate (interior);
- Baggage door (cargo) scuff plate;
- APU exhaust surround;
- Engine pylon leading edge;
- Surround of the aft-half of the pre-cooler exhaust under pylon;
- Exposed exterior surfaces of all exterior latches and hinges;
- Exposed exterior surfaces of the airstair storage bin latches and hinges; and
- Kidney panel surround (1 inch) including fastener heads.

Erosion protection is applied, following paint, over:

- The forward section of the nose radome;
- The leading edges of the winglets;
- The leading edges of the navigation light lenses;
- The horizontal stabilizer tips; and
- Forward edges of the blade antennas.

Some surfaces remain factory finished including:

- The landing gear and wheel rims (white); and
- Composite materials coated with anti-static paint.

Non-skid material is applied to the RHS overwing walkway.

All exterior markings are done by the silkscreen method.

5.11 Emergency Equipment

Emergency equipment is provided for crew and passenger safety. The equipment includes:

- Three (3) portable fire extinguishers;
- Crew and passenger life vests for each crew member and passenger;
- Three (3) rafts with an integrated ELT;
- One (1) quick donning oxygen mask with detachable smoke goggles for pilot, co-pilot and cockpit observer seat occupant;
- Two (2) rechargeable flashlights in the cockpit, One (1) rechargeable flashlight in the Left-hand entrance enclosure and one (1) rechargeable flashlight in the baggage bay;
- Two (2) Portable Breathing Equipment devices;
- One (1) first aid kit;
- One (1) cockpit emergency escape hatch rope; and
- One (1) crash axe;
- Three (3) smoke detectors with EICAS annunciation – one (1) in each lavatory and one (1) in the baggage compartment.

5.12 *Loose Equipment*

Loose equipment items are provided for operational and maintenance support. These items are not included in the performance calculation and BOW estimates provided in this document. The loose equipment list will be itemized in the tail-specific Customer Completion Specification document.

6. CUSTOMER SUPPORT SERVICES

6.1 *Inspection and Acceptance Procedures*

Seller will advise Buyer when the Aircraft will be available for Buyer's inspection and acceptance in accordance with the Agreement. Buyer will be entitled to have a maximum of six (6) persons to participate in the inspection and acceptance of the Aircraft; however, only two (2) representatives of Buyer may participate in flight tests due to safety, insurance and regulatory requirements. Should Buyer's representative fly as co-pilot, said representative must be type certified on the Aircraft with a validated license.

6.2 *Entry-into-Service Support*

Seller will provide, at no additional cost, pilot services for the following activities:

- Two (2) pilots to fly the Aircraft during the inspection and acceptance flight test prior to Delivery Time; and
- Upon request by Buyer, one (1) pilot, for a period not exceeding fourteen (14) days from Delivery Time, to familiarize Buyer's flight crews with day-to-day Aircraft operations, provided that Buyer executes Seller's Standard Pilot Services Agreement prior to Delivery Time.

In addition, Seller will provide, at no additional cost, one (1) entry-into service ("EIS") technician, to familiarize Buyer's technical crew with general tasks and troubleshooting procedures for the Aircraft, at Buyer's home base, for a period not exceeding fourteen (14) days of support within six (6) months from Delivery Time. Days of support include flying days, travel days and/or standby days. Buyer shall provide Seller a written notice a minimum of two (2) weeks prior to the dates on which it will require the EIS support as well as reasonable assistance to obtain any and all necessary work permits, authorizations, export or import permits, visas, validations and security clearances required for the EIS technician to be able to provide its support at Buyer's home base. Buyer shall reimburse Seller for all of the EIS technician's and pilot's reasonable travel and living expenses during such fourteen (14) day period. Such support is not redeemable for cash and has no cash value in the event Buyer chooses to forego these services.

6.3 *Training*

As part of the Aircraft Purchase, Seller shall make available, at authorized facilities, the following courses:

- An initial Type Rating course for two (2) qualified pilots;
- A Transport Canada/FAA/EASA B1/CAAC MEII approved Initial Type ground maintenance training program for two (2) mechanics; and
- A Cabin Crew Type Familiarization Training for one (1) flight attendant.

Also, Seller shall provide operational training for two (2) personnel and familiarization training for up to four (4) additional personnel with respect to Seller-determined features of the Aircraft interior completed at Bombardier's facilities and Seller-determined Bombardier published options. Such operational and familiarization training will be web-based and accessible through the Internet at a location to be provided by Buyer.

All training should be completed before placing the Aircraft into service, but, in any event, all training shall be completed no later than one (1) year from Delivery Time, at which time, Buyer's rights to training at no additional cost shall expire. Aircraft Buyer shall be responsible for all travel and living expenses of Buyer's personnel.

Training described above shall be provided in the English language and does not include on the Job Training (OJT) that may be required by the relevant local national aviation authority (NAA) Inspector.

6.4 Technical Publications

The following documentation and technical publications, included in the Purchase Price of the Aircraft, are provided to Buyer by Seller at Delivery Time in electronic format via the Bombardier SmartPubs viewer. Seller shall, at no additional charge, provide Buyer with five (5) SmartPubs licenses for each of the following:

- Maintenance Manuals (MM) collection, as listed below; and
- Flight Manuals (FM) collection, as listed below.

Buyer will have to assign a Delegated Administrator (DA) responsible for the assignment of subscribed electronic product licenses to the appropriate end-users or network console.

The manuals referred to above are:

Flight Manuals:

- Airplane Flight Manual⁴;
- Quick Reference Handbook⁴;
- Flight Crew Operating Manual⁴;
- Flight Planning and Cruise Control Manual⁴;
- Flight Operation Notifications Manual;
- Computerized Airplane Flight Manual; and
- Computerized In-Flight Performance.

Maintenance Manuals:

- Illustrated Parts Data Publication;
- Aircraft Maintenance Publication;
- Component Maintenance Manuals (referenced within the AMM);
- Ground Handling & Service Information Publication;
- Illustrated Tool & Equipment Publication;
- Maintenance Planning Document;
- Aircraft Non-Destructive Test Publication;
- Standard Practices Manual;
- Aircraft Structure Repair Publication;
- Aircraft Schematic Diagrams Publication;
- Maintenance Review Board Report;
- Airworthiness Limitations;
- Weight & Balance Manual;
- Aircraft Wiring Data Publication; and
- Service Bulletins.

Completion Manuals:

- Supplemental Time Limits Maintenance Checks;
- General Arrangements, Layouts & Schematics (includes Placard Drawings);
- Supplemental Aircraft Wiring Data Publication;
- Cabin Handbook⁴;
- Supplemental Aircraft Maintenance Publication;

- Supplemental Aircraft Schematic Diagram Publication;
- Supplemental Electrical Load Analysis;
- Supplemental Illustrated Parts Data Publication;
- Grooming Guide⁴; and
- Vendors Manuals (CMM).

Other Manuals:

- Aircraft Recovery Publication;
- Airport Planning Publication;
- Crash Crew Chart;
- Dispatch Deviation Guide;
- Ground Operation Checklist;
- Maintenance Facilities and Equipment Planning Publication;
- Water Servicing Guide⁴;
- Waste Servicing Guide⁴;
- Deicing / Anti-icing Fluid Application Information Guide⁴;
- Refueling Guide⁴;
- Passenger Safety Information Card⁵;
- S1000D SNS Breakdown⁴; and
- Data Module Codes and User Guides⁴.

The engine manufacturer will supply the engine manuals to the Buyer through the manufacturer's website.

The completion manual list is subject to change, a definitive customized list will be provided to the Buyer prior to Delivery Time.

The completion manuals do not have revision service. The basic issue of the completion manuals will be provided at Delivery Time and one final revision for some of the completion manuals will be distributed within the ninety (90) days following Delivery Time. Airworthiness limitations (AWL) are provided within the Instruction for Continued Airworthiness (ICA) for each installed STC, as applicable.

In addition, commencing at Delivery Time, Seller shall periodically make available to Buyer, at the last address provided by Buyer in writing to Seller, service bulletins and general information applicable to the Aircraft, as well as any amendments to the documentation and technical publications referred to above applicable to Buyer's Aircraft (except for engine manuals and completion manuals), for a period of 10 years after delivery of the last Global 7500 Aircraft manufactured by Seller. Seller shall provide this service at no additional cost to Buyer for a period of five (5) years from Delivery Time, except for engine manuals ("Free Revision Period"). At the end of the Free Revision Period, this service will be automatically renewed each year and charged to Buyer's account, unless cancelled (or

⁴ Item is also provided as a hard copy version.

⁵ Item is only provided as a hard copy version.

modified) by Buyer no later than thirty (30) calendar days from the date of the invoice for such renewal. Seller will issue a notice sixty (60) days prior to such auto-renewal.

It is understood that the documentation and publications provided under this paragraph and any other software, data, drawings or information related to the Aircraft, including any copies thereof, shall not be reproduced or disclosed without Seller's authorization and are proprietary to Seller and that all rights to patent, copyright, trademark, trade secret and other intellectual property rights therein belong to Seller. Buyer agrees not to modify, translate, reverse assemble, reverse engineer or decompile such documentation, publication, software, data, drawings or other information. Further, Buyer agrees to use such documentation, publications, software, data, drawings or other information solely to maintain, operate or repair the Aircraft.

All documentation and technical publications provided are subject to the then current Bombardier Business Aircraft Technical Publications Terms and Conditions available on the Bombardier business aircraft customer portal website⁶ by navigating to LIBRARY > Technical Publications > Technical Publications Terms and Conditions. The terms and conditions are subject to change.

6.5 Technical Support - SmartFix™ Plus Troubleshooting Tool

SmartFix™ Plus is an intuitive troubleshooting tool designed to familiarize users with Aircraft system operation and provide fault isolation procedures.

A subscription to the SmartFix™ Plus web based troubleshooting tool will be provided at no additional cost to the Buyer for a period of five (5) years following Delivery Time.

Additionally, a tablet computer configured to access SmartFix™ Plus shall be provided to the Buyer by Seller at Delivery Time, which will include a one (1) year subscription at no additional cost.

SmartFix™ Plus includes the following:

- Enhanced system descriptions;
- Troubleshooting recommendations for Crew Alerting System (CAS) messages, Onboard Maintenance System (OMS) fault equations, Cabin fault equations, observed faults and troubleshooting hints and tips, as well as plain English descriptions for CAS, OMS and cabin fault equations;

- Detailed component locators using high-resolution images and Aircraft diagrams;
- Hyperlinks that will ease access to wiring diagrams and aircraft maintenance procedures; and
- Continuous updates for the most recent information.

6.6 Smart Services

Buyer may enroll the Aircraft in an applicable Bombardier Smart Services component coverage program, providing cost coverage for most airframe system components replacement in return for monthly payments based on an adjustable dollar rate per flight hour. Enrollment is subject to Buyer entering into the applicable Smart Services Agreement with Seller.

6.7 Smart Link Plus Services

Buyer may enroll the Aircraft in the Bombardier Smart Link Plus services, which include: i) Takeoff and Landing Notifications, ii) In-Flight Fault Notifications, iii) Automated Engine Data Distribution (in-flight and on-ground), iv) Automated Wireless Data Transfer over Wi-Fi, v) Wireless PMAT Connectivity, and vi) Remote maintenance capability.

Enrollment is subject to Buyer entering into the then applicable Smart Link Plus Services Agreement with Seller.

6.8 Computer Maintenance Management Services (CMMS)

In order to facilitate the performance of maintenance of the Aircraft at required intervals, Seller shall provide to Buyer the Computer Maintenance Management Services (CMMS) from the Seller recommended supplier of such services, free of charge for one (1) year following Delivery Time.

CMMS enables operators of the Aircraft to monitor the routine maintenance and replacement of serialized components, to schedule services, and to record accomplishment of scheduled and unscheduled maintenance, Services Bulletins, and Airworthiness Directives.

Buyer acknowledges that an independent third party will provide the CMMS. Buyer further acknowledges that Seller shall not be a party to the CMMS Agreement between Buyer and the Seller recommended supplier of CMMS, shall have no obligation or liability and that Seller makes no representations or warranties under such agreement, whether express or implied.

⁶ <https://mybusinessaircraft.bombardier.com>

6.9 Portable Maintenance Access Terminal (PMAT)

A Portable Maintenance Access Terminal (PMAT) will be provided with the Aircraft, and the software loaded package will enable the interface with Aircraft Health Management Unit (AHMU) to view historical and live data on ground. It will facilitate loading of Loadable Software Aircraft Parts (LSAP).

6.10 Medical Assistance Program

The Medical Assistance Program is offered free of charge for one (1) year following Delivery Time and, upon subscription, renewable annually thereafter with the service supplier.

The service supplier provides the following services:

- Medical assistance: 24-hour pilot to physician hotline for immediate medical consultation while in flight or on the ground;
- Training: A comprehensive course on management of in-flight illness and injury training designed to help flight crews for three (3) people;
- Aircraft first aid kit: First aid kit designed specifically for handling in-flight medical incidents.

Buyer acknowledges that the Medical Assistance Program will be provided by an independent third party. Buyer further acknowledges that Seller shall not be a party to the Medical Assistance Program agreement between Buyer and the Medical Assistance Program provider, shall have no obligation or liability and that Seller makes no representation or warranties under such agreement, whether express or implied.

7. WARRANTY

7.1 Subject to the terms set forth in this Article 7., Seller warrants to Buyer that at Delivery Time and for the Warranty periods set forth below, the Aircraft shall be free from: i) defects in material, ii) defects in manufacture and iii) defects in design, having regard to the state-of-the-art as of the time of design of the Aircraft ("Warranty"). In case of any such defect found during the Warranty periods set forth below, Seller's sole obligation and liability under this Warranty shall be a) expressly limited to correction by repair, replacement or rework of such defect by Seller at Seller's facilities, or at such other facility as may be designated by Seller, it being understood that Seller shall be responsible for the costs of the parts, material and labor related to such repair, replacement or rework provided such replacement parts were obtained from Seller and b) subject to Buyer giving written notice to Seller's Warranty Department of a claim under this Warranty (the "Claim") as soon as practicable and within the earlier of either (i) ninety (90) days following discovery of the defect or (ii) the expiration of the applicable Warranty period set forth below.

Cost and mode of transportation or shipping of any item(s), excluding the Aircraft and excluding customs, duties, and tariffs, whether to Buyer or to Seller, which are covered under the Warranty for the purpose of a repair, replacement or rework pursuant to the Warranty shall be via regular commercial overnight service as determined by Seller and at Seller's expense. For the full Warranty to apply, Seller must receive defective components within the timelines specified in the then current Seller's Spare Parts & Component Repair Price Catalog General Terms and Conditions available on Bombardier Business Aircraft customer portal website⁷ by navigating to PARTS > Related Links > Parts General Terms and Conditions. The terms and conditions are subject to change.

7.2 The Warranty for the Aircraft shall be for 5,000 flight hours or sixty (60) months from Delivery Time, whichever first occurs. The Warranty for interior completion systems and components shall be for 2,000 flight hours or twenty-four (24) months from Delivery Time, whichever first occurs.

7.3 Notwithstanding Article 7.2, the Warranty for the Completion Softgoods shall be for 2,000 flight hours or twenty-four (24) months from Delivery Time, whichever first occurs.

For the purposes of this Section 7, the Completion Softgoods shall consist of: (i) carpets and other floor coverings, (ii) countertops, (iii) curtains, (iv) exterior

paint and stripes, (v) fabrics / leathers and other similar finishings, (vi) headliners and sidewalls, (vii) mattresses, (viii) mirrors, (ix) plating, (x) seat foam and coverings, (xi) window shades, and (xii) wood and veneer.

7.4 Notwithstanding Articles 7.2 and 7.3, the Warranty for airframe primary structurally significant items (metal structures detailed in Sections 53 (Fuselage), 55 (Stabilizers) and 57 (Wings) of the Aircraft Structural Repair Manual in effect as of the date of this Agreement shall be for 20,000 flight hours or for two-hundred-forty (240) months from Delivery Time, whichever first occurs; provided, however, that such Warranty period does not apply to doors, fairings, covers, access panels, non-metallic structures and systems/equipment support structures for which specific items the Warranty period shall be as stated in Article 7.2.

7.5 Any Seller-issued Service Bulletin incorporated by Seller prior to Delivery Time shall be covered by the applicable Warranty set forth in Articles 7.2, 7.3 and 7.4 except for any material furnished by Buyer. Excluded from the Warranty are vendor-issued Service Bulletins, Airworthiness Directives and/or advisory wires unless such Service Bulletins, Airworthiness Directives and/or advisory wires form part of a Seller-issued Service Bulletin incorporated by Seller prior to Delivery Time.

7.6 Buyer shall be entitled to claim a repair, replacement or rework pursuant to this Warranty for a defective part provided:

- i) The Aircraft has been operated or maintained in accordance with Seller's Approved Flight Manual, Maintenance Manual and Service Bulletins, as each may be amended from time to time by Seller and
- ii) An installation, repair, alteration or modification to or of the Aircraft made by Buyer or a third party is not the cause or a contributing cause of the defect and
- iii) The Aircraft has not been subjected to misuse, abuse, damage or accident and has not been improperly stored or protected against the elements when not in use.

7.7 Notwithstanding any other provisions herein, the Warranty shall not apply to the engines installed on the Aircraft. The engine Warranty shall be provided directly by the engine manufacturer to Buyer, shall be the sole responsibility of the engine manufacturer, and the rights

⁷ <https://mybusinessaircraft.bombardier.com>

of Buyer with respect to the engines shall be a matter as between the engine manufacturer and Buyer. Buyer agrees that to give effect to the foregoing and facilitate the engine Warranty process, Seller shall provide to the engine manufacturer information pertaining to the engines installed on the Aircraft, as well as Buyer information, which would allow the engine manufacturer to both record the engine Warranty and identify and contact Buyer with respect to the engine Warranty and other related services for the Aircraft's engines offered by the engine manufacturer. Buyer agrees that Seller shall have no obligation or liability for the engines including, without limitation, the Warranty for the engines, service bulletins for the engines and/or without limitation, any lack of performance, reliability or maintainability of the Aircraft due to the engines. Notwithstanding the foregoing, the Warranty does apply to Seller's installation of the engines on the Aircraft including the design of such installation.

7.8 The Warranty shall not apply to the following:

- Any accessory, equipment or part incorporated in the Aircraft, which is not furnished pursuant to this Agreement;
- Scheduled maintenance, inspections and overtime;
- Normal wear and tear items, such as but not limited to: brake wear and tire wear, exterior paint wear or exterior paint mismatch as a result of a repair, accrued life usage;
- Consumables (such as fuel, oil, liquid de-icing systems and filters) or any servicing or replenishment of such consumables;
- Interior and exterior lights (such as light bulbs, lamps, lighting strips, Light Emitting Diodes (LED's)) and interior and exterior placards;
- Ground support equipment (including engine covers), pitot covers, loose equipment, tooling, windshield rain repellent;
- Windshield crazing;
- Corrosion and erosion caused by operational use of the Aircraft, exposure of the Aircraft to

environmental elements regardless of time in service;

- Diverter strips, static wicks, seals (including but not limited to door, panel, aerodynamic or fairing seals) and seized or stripped hardware;
- Foreign object damage (FOD);
- Labor associated with the removal and installation of any loaner rental units;
- Preventative maintenance or components changed for precautionary measures, as well as Buyer requests for the replacement of parts; and
- Software upgrades, and flight test and crew expenses associated with re-certification or return to service of Aircraft.

7.9 Any repair, replacement or rework under the Warranty shall be covered to the extent of the unexpired portion of the applicable Warranty period set forth in this Article 7 remaining at the time of such repair, replacement or rework.

7.10 All costs resulting from the removal of non-defective items (No Fault Found) other than by Seller or Seller's representatives, shall be paid by Buyer.

7.11 Buyer shall maintain complete records of operations and maintenance of the Aircraft and shall make such records available to Seller as Seller may require. If Buyer fails to maintain such records, Seller shall be relieved of its Warranty obligations to the extent that such failure affects Seller's obligations under this Warranty provision.

7.12 The Warranty is accessory to the Aircraft and follows the rights to the Aircraft without requirement of Seller's approval for transfer. The Warranty is for the benefit of Buyer, its successors and assigns and all persons to whom title to or possession of the Aircraft may be transferred during the Warranty periods set forth herein, provided that any such persons or entities shall remain subject to the applicable provisions of this Agreement to the same extent as Buyer.

8. PATENT AND TRADEMARK PROTECTION

Subject to the provisions set out below, Seller shall indemnify and defend Buyer and save Buyer harmless from any claim brought against Buyer that Buyer's use of the Aircraft constitutes an infringement of a) a United States or Canadian patent, utility patent, design patent, industrial design or trademark, or b) a patent, utility patent, design patent, industrial design or trademark of another country that is a counterpart of a United States or Canadian patent or trademark and that is issued by any country that has ratified and at the time of such claim is a contracting party to the *Convention on International Civil Aviation* and to the *International Convention for the Protection of Industrial Property* provided that:

- i) Buyer notifies Seller in writing of the claim within ten (10) days after Buyer's receipt of the claim;
- ii) Upon Seller's written request, Buyer immediately gives to Seller control over the defense and/or settlement of the claim;
- iii) Buyer fully cooperates with Seller in such defense and/or settlement; and
- iv) Buyer does not prejudice Seller's conduct of such defense and/or settlement.

In no event shall Seller have any obligation with respect to any liability, loss, damage or expense in respect of, arising out of or resulting from any lack or loss of use of the Aircraft.

The foregoing shall only create an indemnity obligation upon Seller for claims which are solely and directly based upon the use, sale or offer for sale of the Aircraft. No indemnity obligation shall arise or exist with respect to claims that are based upon

- i) The engines, avionics equipment, or any accessory, equipment or part thereof, or any other accessory,

equipment or part that is not manufactured by Seller or that is not manufactured exclusively pursuant to Seller's detailed design, or

- ii) Any accessory, equipment or part that is included in the Aircraft by Buyer, on behalf of Buyer or at Buyer's request, or that is supplied by Buyer or procured or manufactured by Seller in accordance with Buyer's specifications; or
- iii) The use of the Aircraft in a manner prohibited by relevant directives or regulations issued by appropriate government agencies or instrumentalities.

Subject to the foregoing provisions of this Patent and Trademark Protection, Seller shall pay court costs and Buyer's reasonable attorney's fees for defending such claim, as well as the amount of any settlement deemed advisable by Seller or any damages that may be awarded against Buyer in respect of such claim. At its own expense, Seller may at any time, at its option:

- i) Procure for Buyer the right to continue to use the Aircraft; or
- ii) Modify the Aircraft; including modifying or replacing any part thereof to render the Aircraft non-infringing.

In the event the use of the Aircraft by Buyer has been enjoined, Buyer shall have the right to require Seller to take action in accordance with the foregoing, provided that it shall be Seller's sole option as to which alternative action it takes. Except as expressly provided above, Seller does not provide any other representation, Warranty or protection concerning patents, utility patents, design patents, industrial designs or trademarks with respect to the Aircraft.

9. CONSULTANTS

Should Buyer retain the services of a consultant or other third party representative (the "Consultant") in connection with this Agreement then, before any contact be initiated between Consultant and Seller, Buyer shall (i) provide Seller with a written notice confirming the appointment of such Consultant and describing the responsibilities of such Consultant and the different

matters (ex: technical and/or financial matters) with respect to which Consultant has been granted authority to act on behalf of Buyer and bind Buyer and (ii) cause Consultant to sign Seller's standard non-disclosure agreement. Seller is entitled to conclusively rely on the content of such notice in its dealings with Consultant.

Global 7500, SmartFix and Bombardier Vision are trademarks of Bombardier Inc. or its affiliates