


# Arduino Due to Tesla Model S/X module BMS

EVTV 6-port production harness • all six 6S modules pre-connected • BMB chain powered from Due +5 V

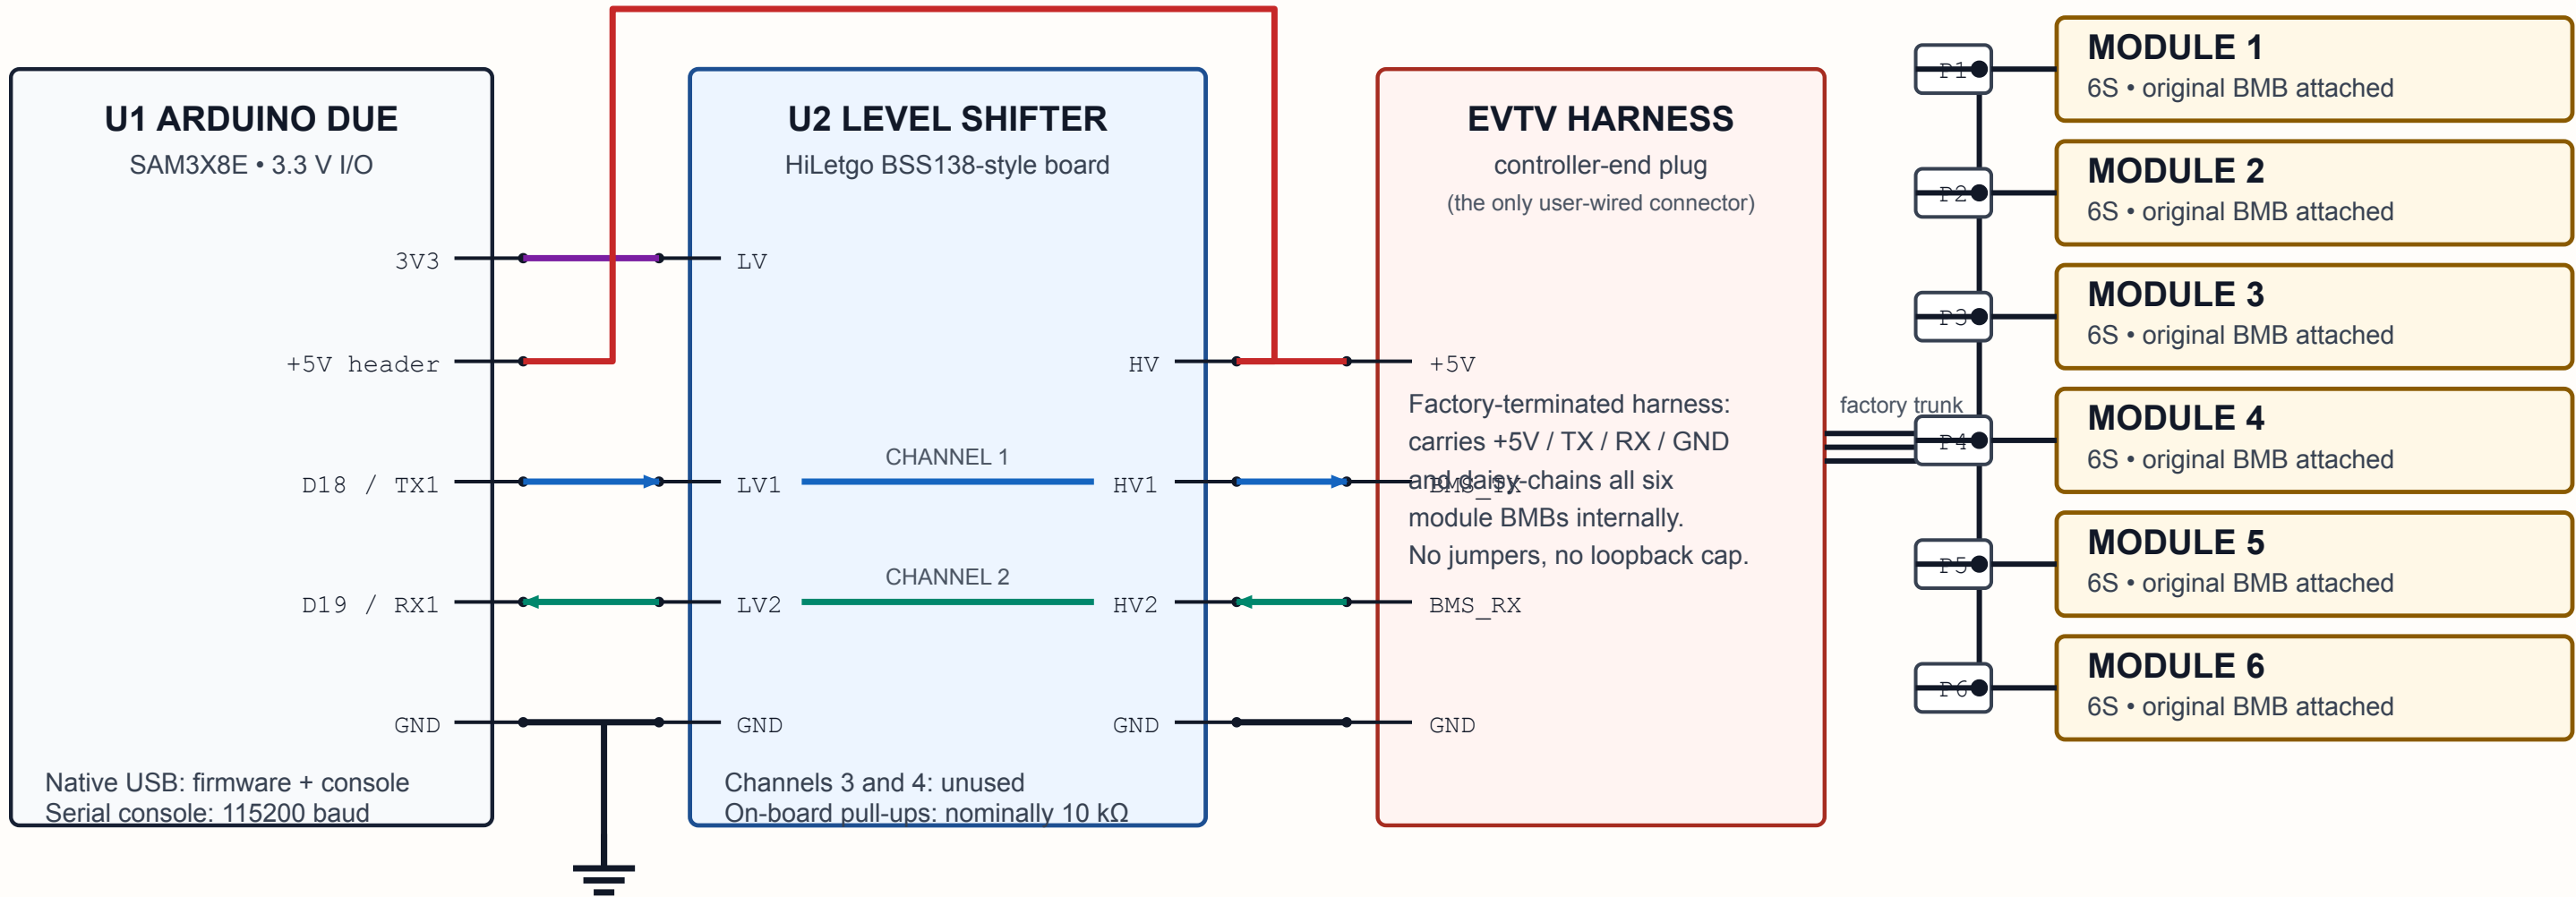

## BENCH-TEST LIMITATION

U2 is an I<sup>2</sup>C MOSFET shifter with 10 kΩ pull-ups. At 612.5 kbaud it may have slow rising edges over the harness run. Do not rely on this prototype interface as the only charge/discharge protection.

Power the Due normally through USB or VIN; use its +5 V header as an output here. This is UART-like serial, not CAN.  
The 6-port EVTV harness terminates the BMB daisy chain internally — only the four controller-end wires (+5V / TX / RX / GND) need attention.