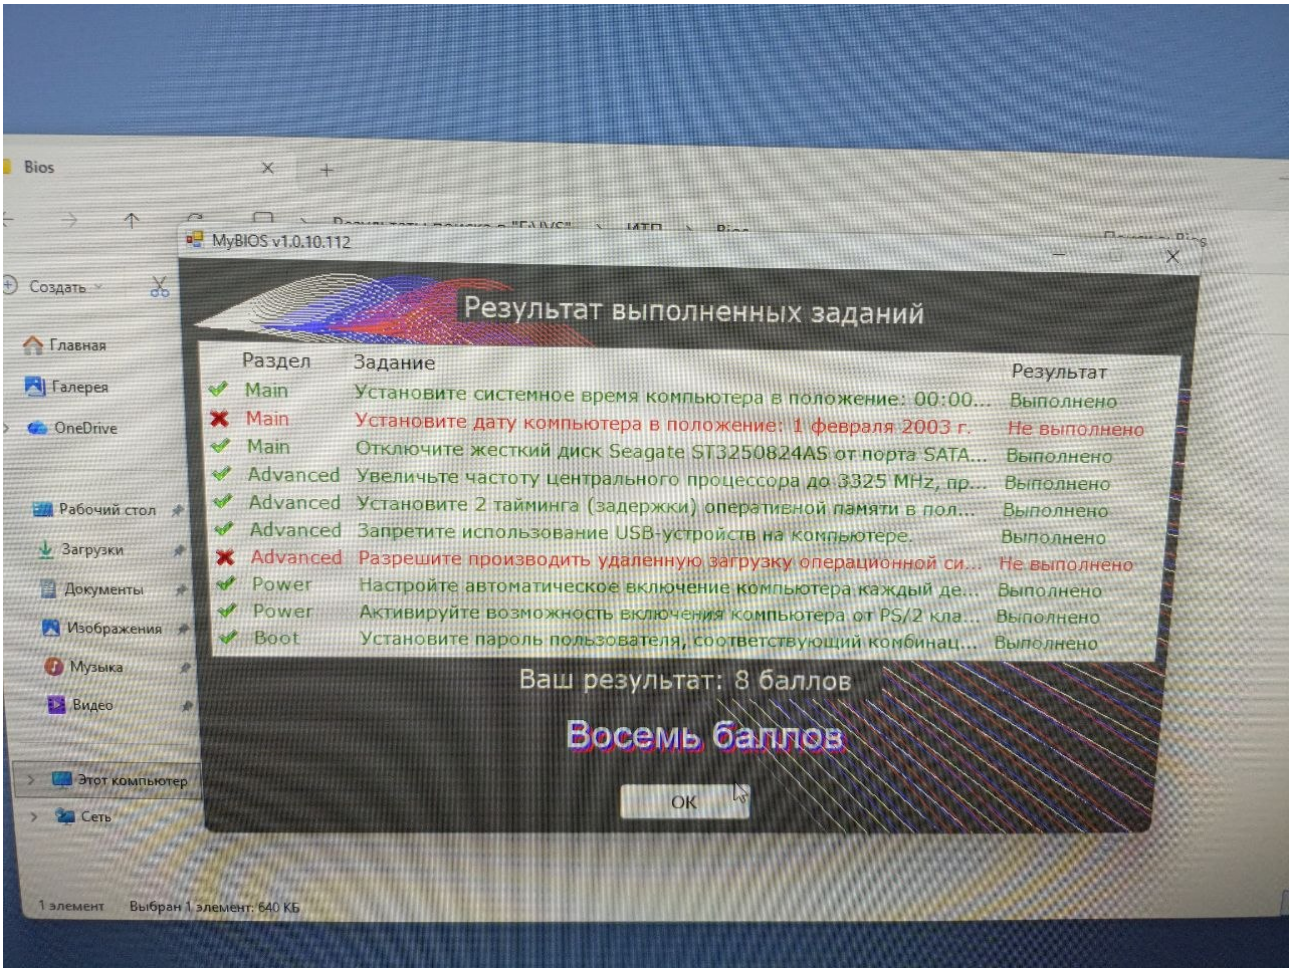
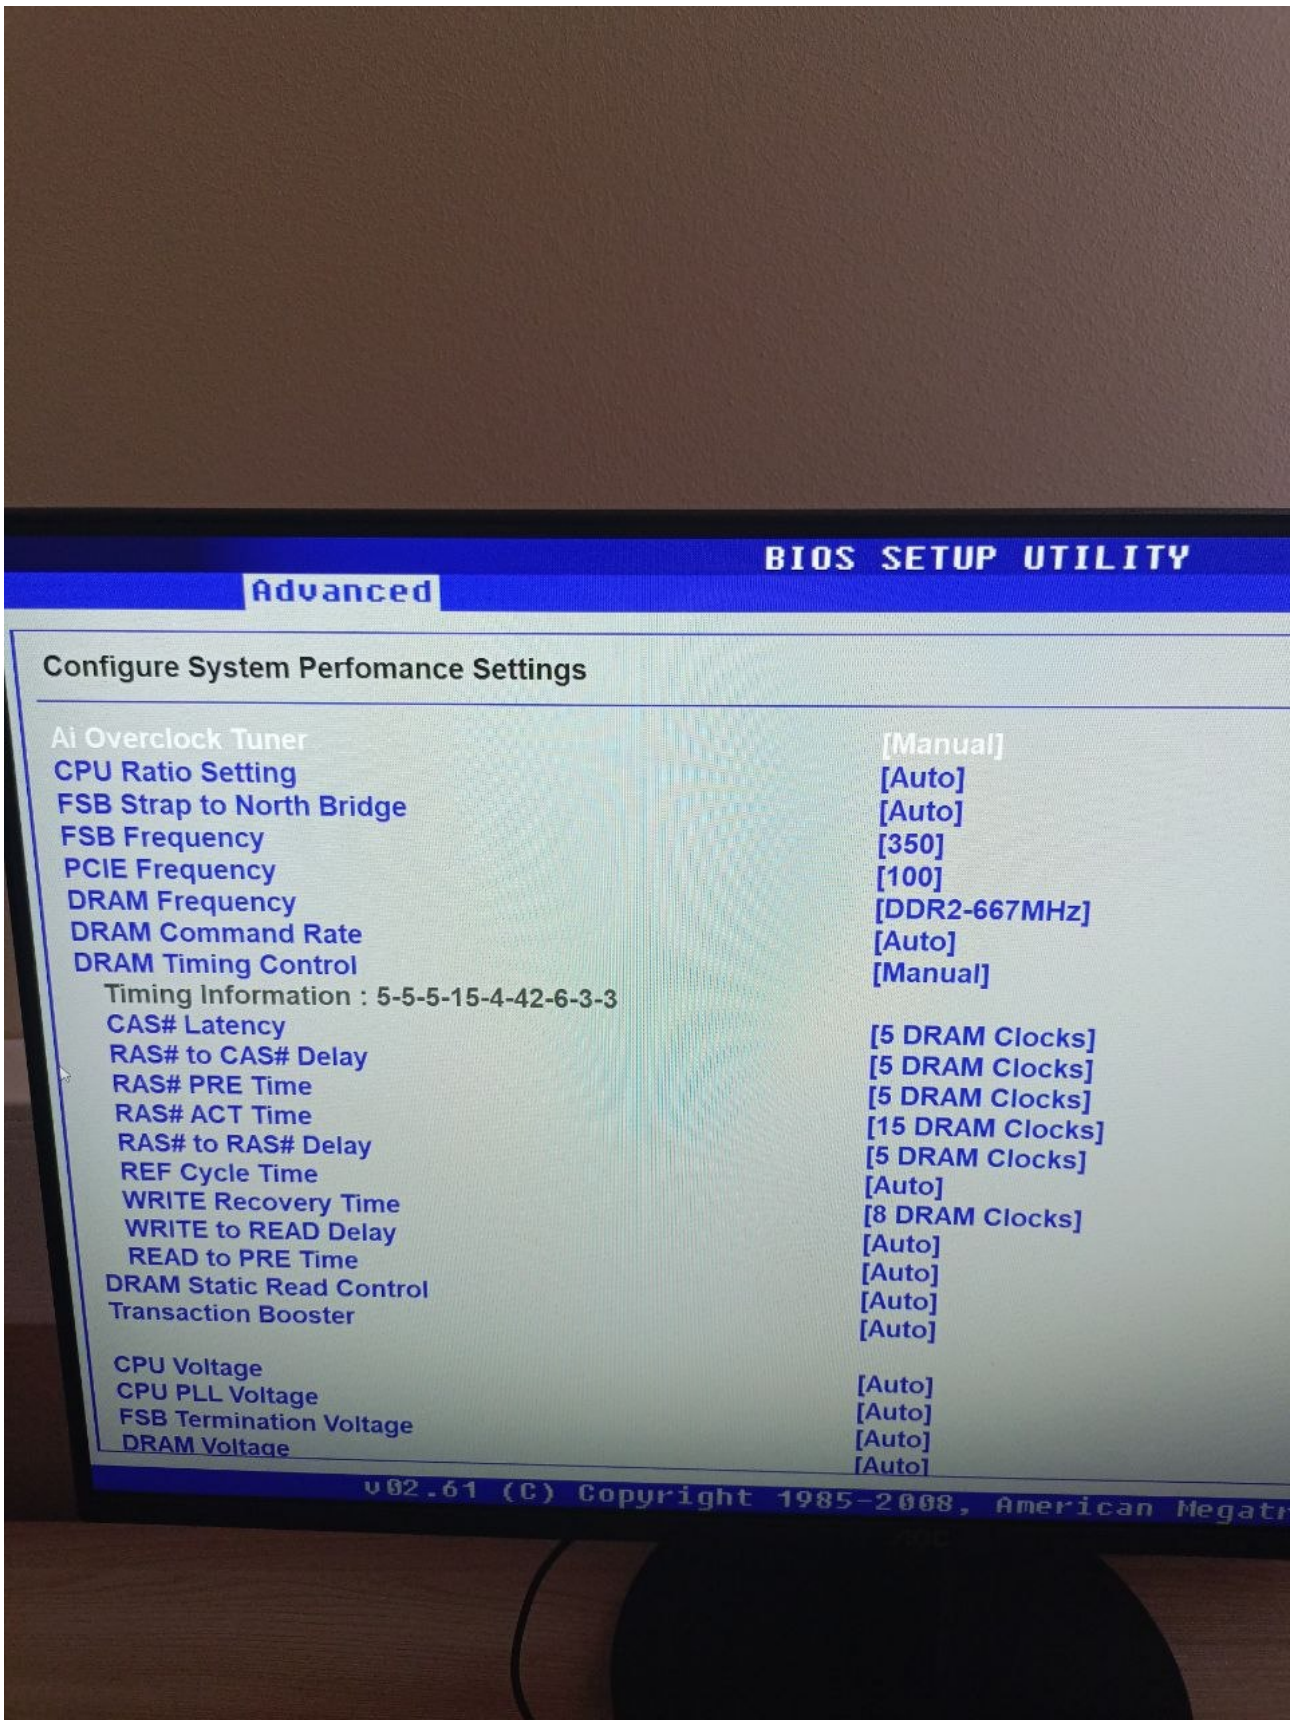
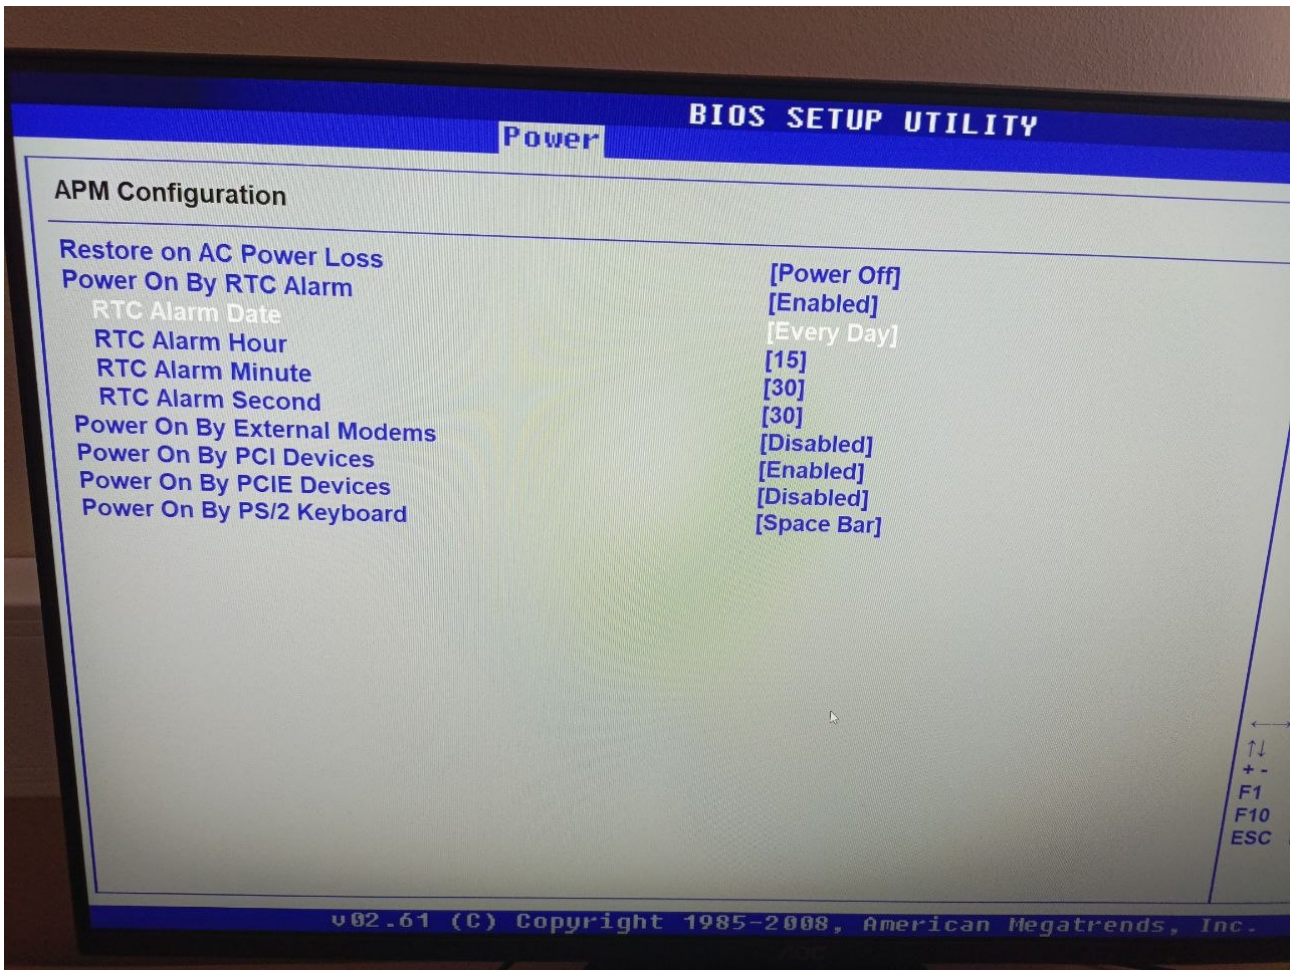
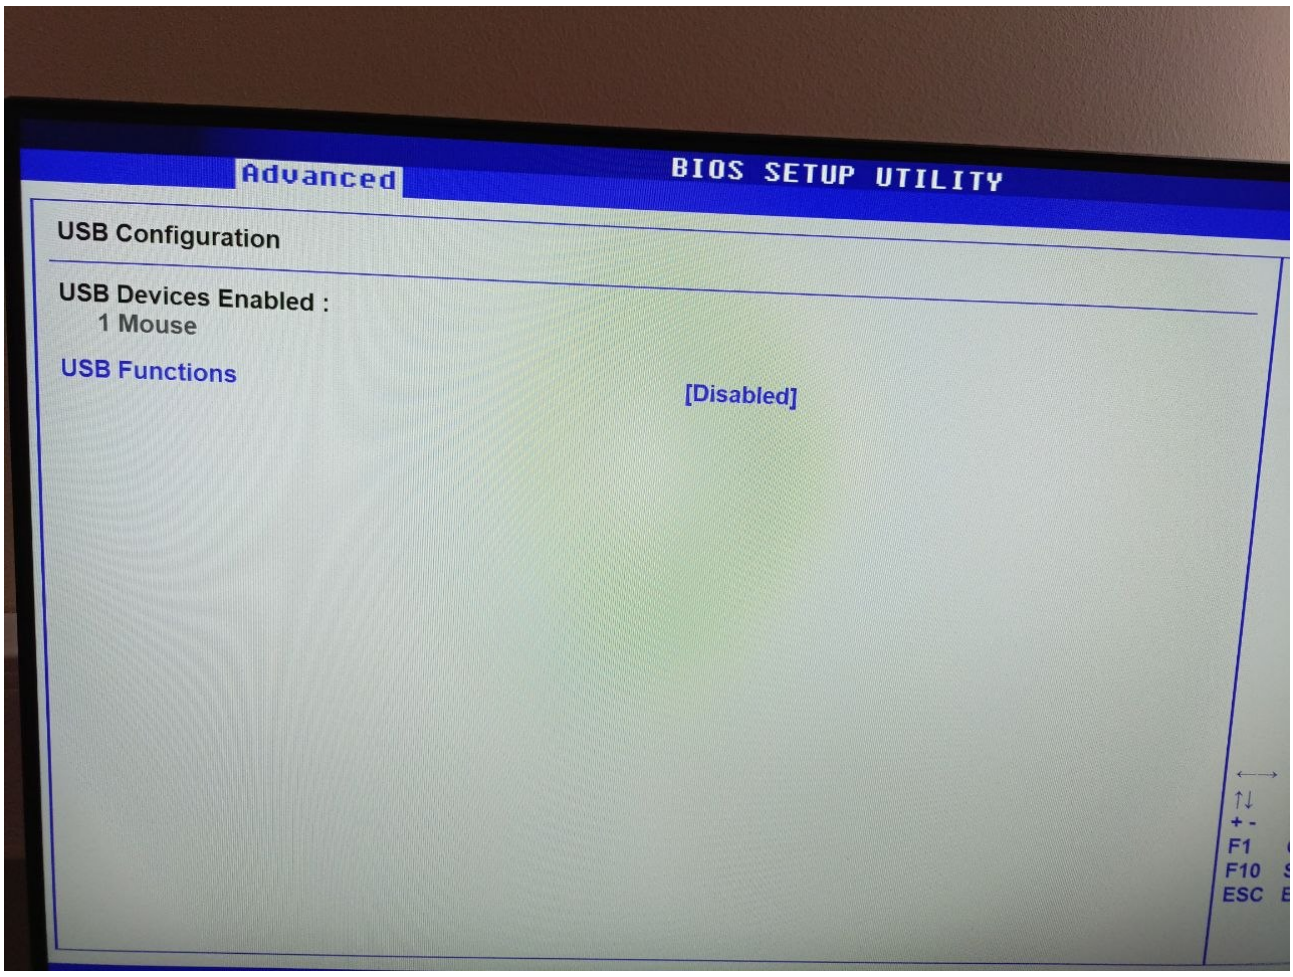
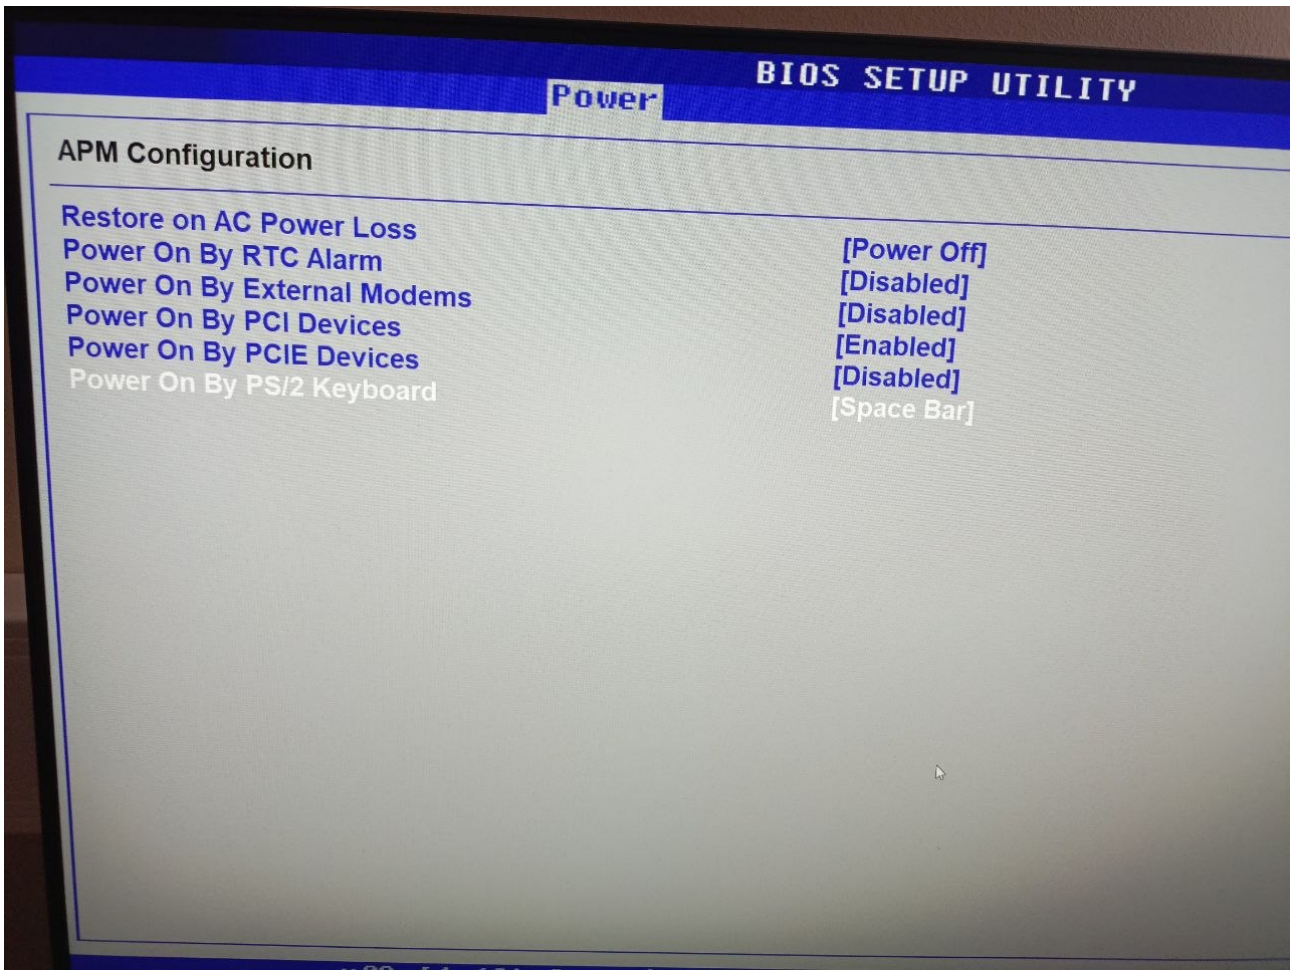
Лабараторная № 3
Задание 1

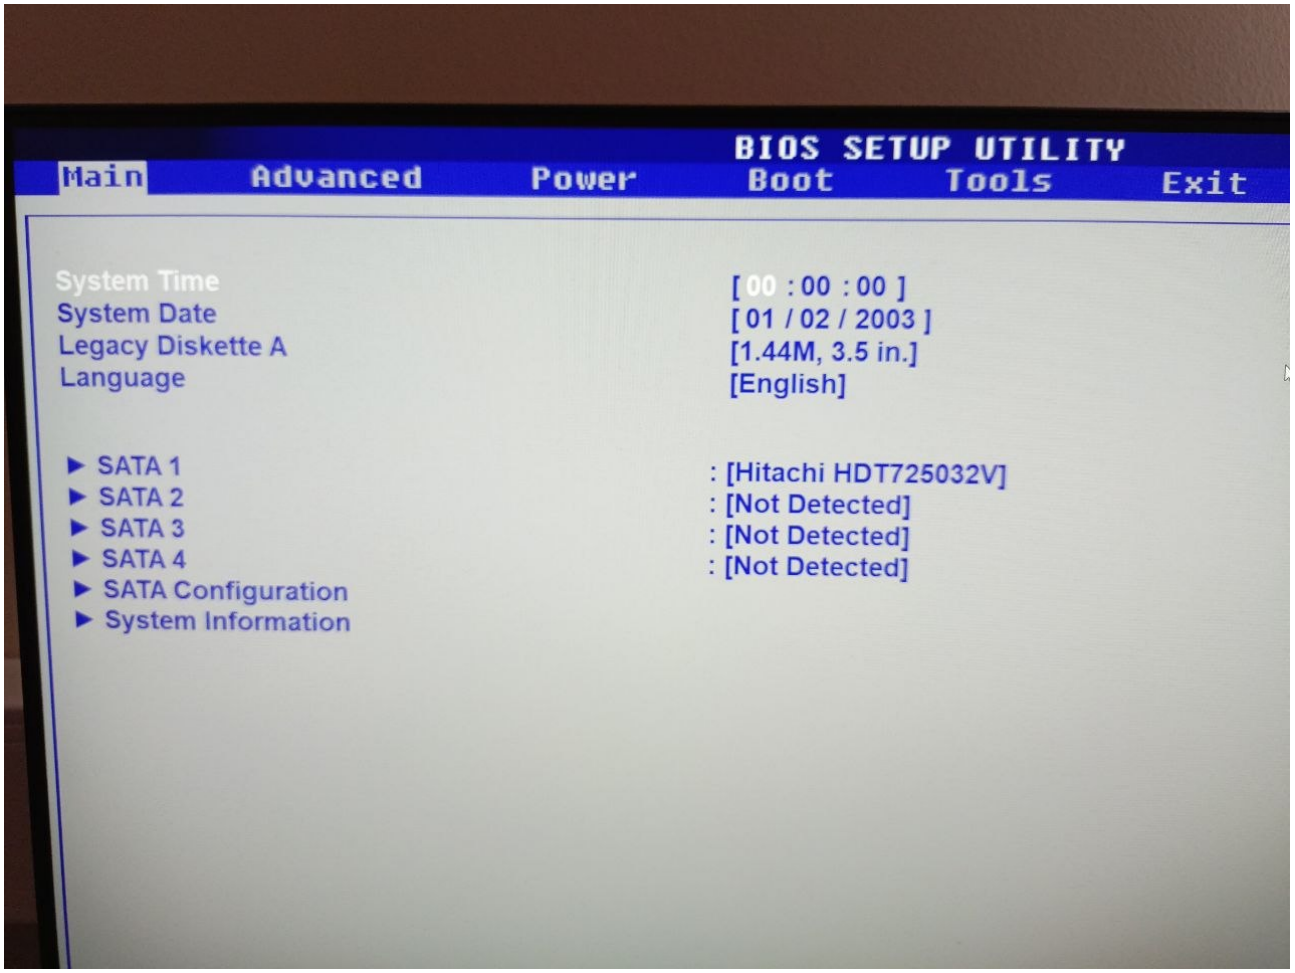



BIOS SETUP UTILITY
Advanced
Configure System Perfomance Settings
Ai Overclock Tuner [Manual]
CPU Ratio Setting [Auto]
FSB Strap to North Bridge [Auto]
FSB Frequency [350]
PCIE Frequency [100]
DRAM Frequency [DDR2-667MHz]
DRAM Command Rate [Auto]
DRAM Timing Control [Manual]
Timing Information : 5-5-5-15-4-42-6-3-3
CAS# Latency [5 DRAM Clocks]
RAS# to CAS# Delay [5 DRAM Clocks]
RAS# PRE Time [5 DRAM Clocks]
RAS# ACT Time [15 DRAM Clocks]
RAS# to RAS# Delay [5 DRAM Clocks]
REF Cycle Time [Auto]
WRITE Recovery Time [8 DRAM Clocks]
WRITE to READ Delay [Auto]
READ to PRE Time [Auto]
DRAM Static Read Control [Auto]
Transaction Booster [Auto]
CPU Voltage [Auto]
CPU PLL Voltage [Auto]
FSB Termination Voltage [Auto]
DRAM Voltage [Auto]
v02.61 (C) Copyright 1985-2008, American Megatr

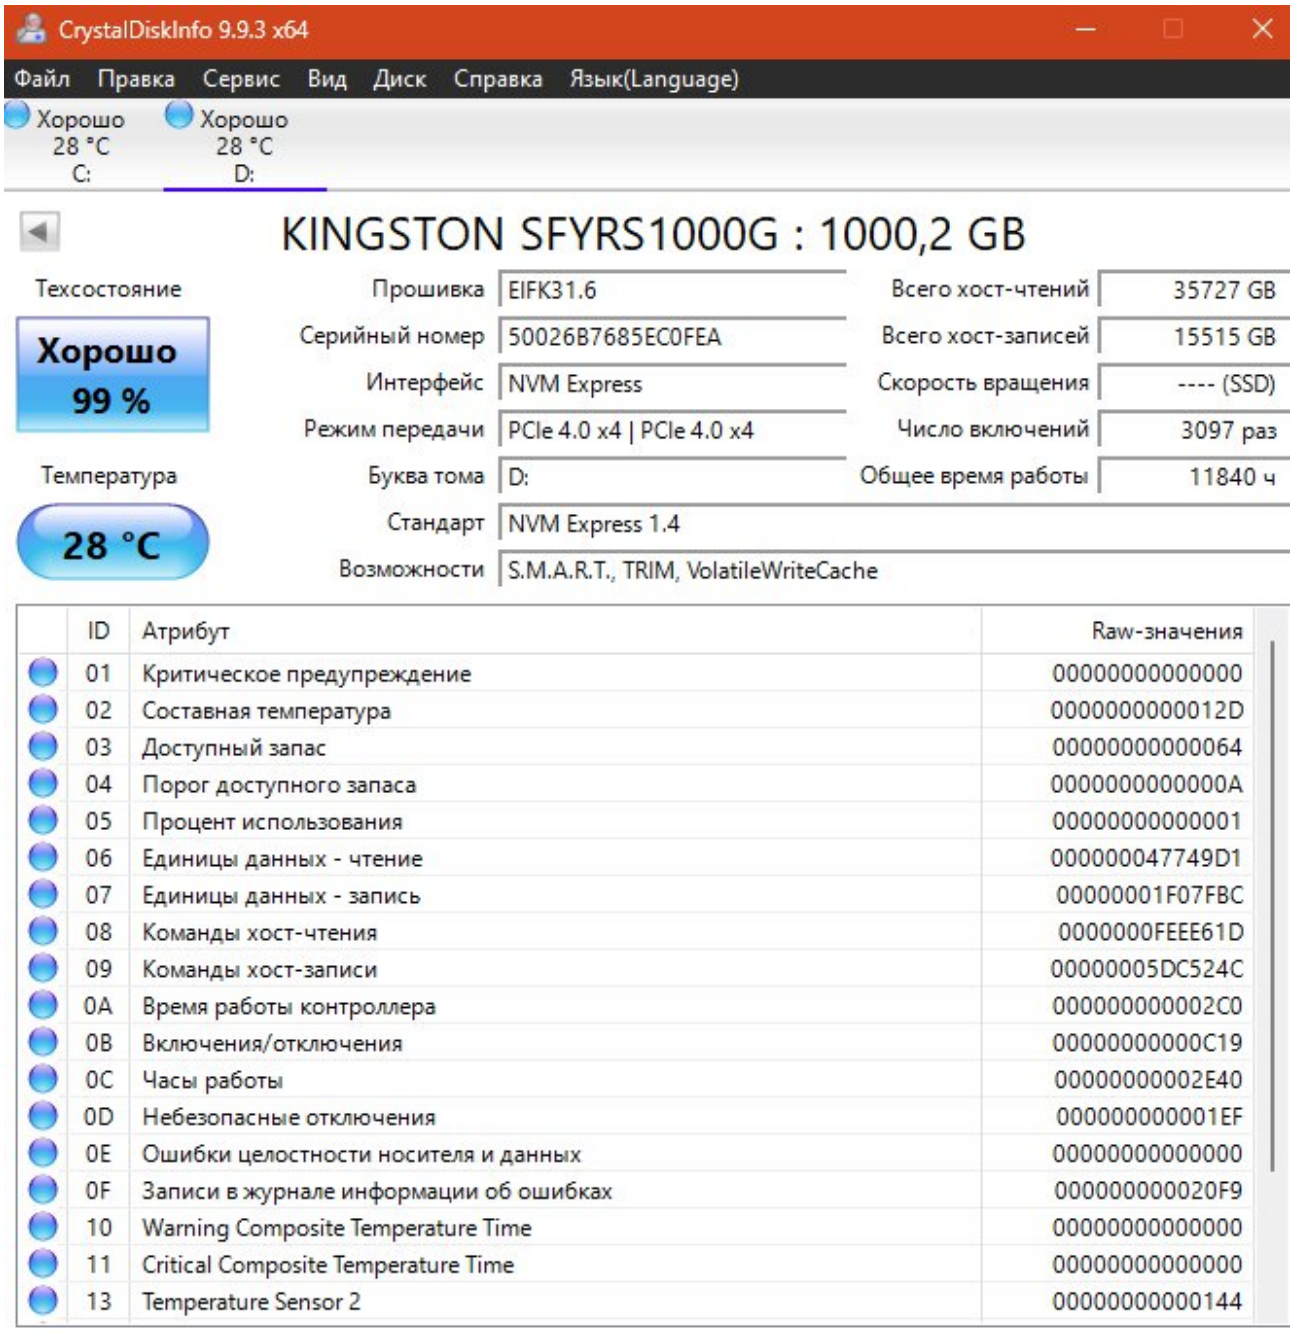

BIOS SETUP UTILITY
Power
APM Configuration
Restore on AC Power Loss [Power Off]
Power On By RTC Alarm [Enabled]
RTC Alarm Date [Every Day]
RTC Alarm Hour [15]
RTC Alarm Minute [30]
RTC Alarm Second [30]
Power On By External Modems [Disabled]
Power On By PCI Devices [Enabled]
Power On By PCIE Devices [Disabled]
Power On By PS/2 Keyboard [Space Bar]
↑↓
+ -
F1
F10
ESC
v02.61 (C) Copyright 1985-2008, American Megatrends, Inc.


Advanced
BIOS SETUP UTILITY
USB Configuration
USB Devices Enabled :
1 Mouse
USB Functions
[Disabled]
F1
F10
ESC

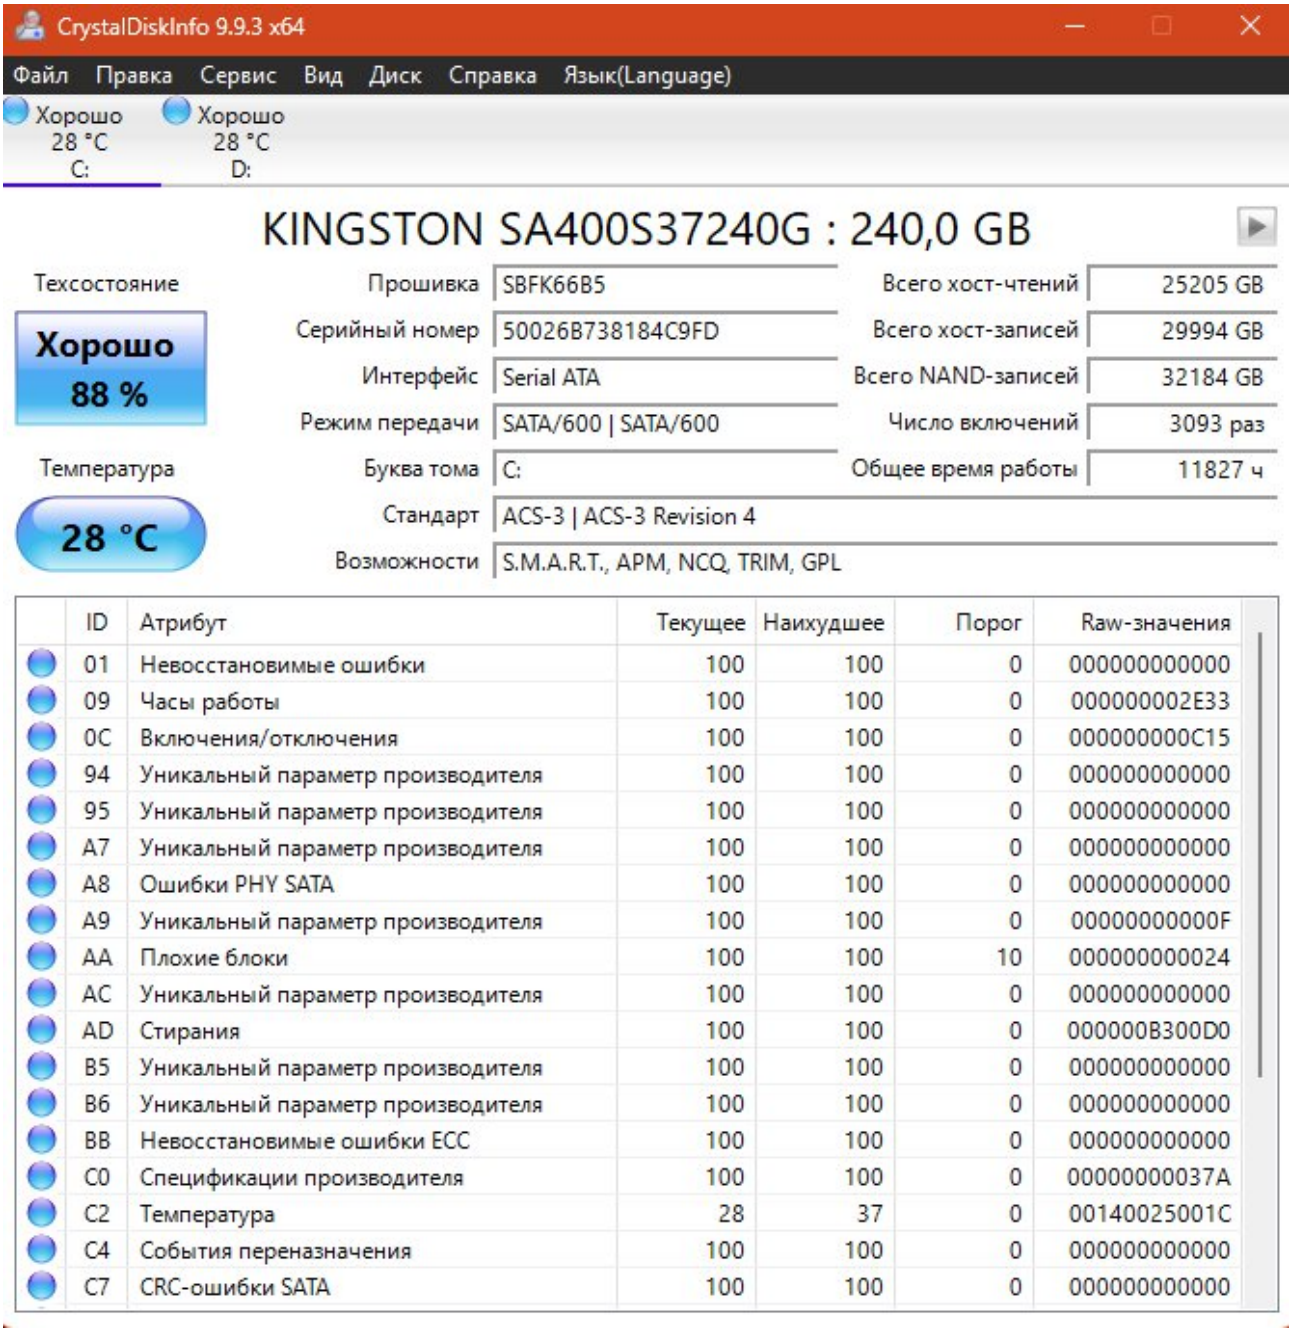

BIOS SETUP UTILITY
Power
APM Configuration
Restore on AC Power Loss
Power On By RTC Alarm
Power On By External Modems
Power On By PCI Devices
Power On By PCIE Devices
Power On By PS/2 Keyboard
[Power Off]
[Disabled]
[Disabled]
[Enabled]
[Disabled]
[Space Bar]


BIOS SETUP UTILITY
Main
Advanced
Power
Boot
Tools
Exit
System Time
[00 :00 :00]
System Date
[01 / 02 / 2003]
Legacy Diskette A
[1.44M, 3.5 in.]
Language
[English]
► SATA 1
: [Hitachi HDT725032V]
► SATA 2
: [Not Detected]
► SATA 3
: [Not Detected]
► SATA 4
: [Not Detected]
► SATA Configuration
► System Information

Задание 2



ID	Атрибут	Raw-значения
01	Критическое предупреждение	00000000000000
02	Составная температура	0000000000012D
03	Доступный запас	00000000000064
04	Порог доступного запаса	0000000000000A
05	Процент использования	00000000000001
06	Единицы данных - чтение	000000047749D1
07	Единицы данных - запись	00000001F07FBC
08	Команды хост-чтения	0000000FEEE61D
09	Команды хост-записи	00000005DC524C
0A	Время работы контроллера	000000000002C0
0B	Включения/отключения	00000000000C19
0C	Часы работы	00000000002E40
0D	Небезопасные отключения	000000000001EF
0E	Ошибки целостности носителя и данных	00000000000000
0F	Записи в журнале информации об ошибках	000000000020F9
10	Warning Composite Temperature Time	00000000000000
11	Critical Composite Temperature Time	00000000000000
13	Temperature Sensor 2	00000000000144



ID	Атрибут	Текущее	Наихудшее	Порог	Raw-значения
01	Невосстановимые ошибки	100	100	0	000000000000
09	Часы работы	100	100	0	000000002E33
0C	Включения/отключения	100	100	0	000000000C15
94	Уникальный параметр производителя	100	100	0	000000000000
95	Уникальный параметр производителя	100	100	0	000000000000
A7	Уникальный параметр производителя	100	100	0	000000000000
A8	Ошибки PHY SATA	100	100	0	000000000000
A9	Уникальный параметр производителя	100	100	0	00000000000F
AA	Плохие блоки	100	100	10	000000000024
AC	Уникальный параметр производителя	100	100	0	000000000000
AD	Стирания	100	100	0	000000B300D0
B5	Уникальный параметр производителя	100	100	0	000000000000
B6	Уникальный параметр производителя	100	100	0	000000000000
BB	Невосстановимые ошибки ECC	100	100	0	000000000000
C0	Спецификации производителя	100	100	0	00000000037A
C2	Температура	28	37	0	00140025001C
C4	События переназначения	100	100	0	000000000000
C7	CRC-ошибки SATA	100	100	0	000000000000

1. Накопитель C: (SSD) — Kingston SA400S37240G (240 ГБ)

- **Общее техническое состояние:** Программа CrystalDiskInfo оценивает состояние как **«Хорошо»**.
- **Температура и наработка:** Температура в норме — **28°C**. Общее время работы составляет **11827 часов**.
- **Состояние ресурса:** Техническое состояние (здоровье) — **88%**. Зафиксировано **3093** цикла включения и **25 020 ГБ** записанных данных.
- **Ошибки и переназначенные сектора:** Отсутствуют. Атрибуты, отвечающие за ошибки чтения/записи, переназначение секторов и сбои, имеют идеальные значения (100). Критических предупреждений нет.

2. Накопитель D: (NVMe SSD) — Kingston SFYRS1000G (1000 ГБ / 1 ТБ)

- **Общее техническое состояние:** Программа CrystalDiskInfo оценивает состояние как **«Хорошо»**.
- **Температура и наработка:** Температура в норме — **28°C**. Общее время работы составляет **11840 часов**.
- **Состояние ресурса:** Техническое состояние (здоровье) — **99%**. Это отличный показатель, зафиксировано **3097** циклов включения и **35 727 ГБ** записанных данных.
- **Ошибки и переназначенные сектора:** Отсутствуют. Атрибуты критических предупреждений, доступного запаса и ошибок целостности равны нулю. Износ минимальный (показатель использования — 1%).