
# Yealink SIP-T31W Datasheet

## Entry-level IP Phone with 2 Lines & HD voice

As a very fashionable and friendly entry-level IP phone, Yealink SIP-T31W has an extra-large 132x64-pixel graphical LCD with a backlight that brings a clear visual experience for users. The T31W offers support for two VoIP accounts and includes local 5-way conferencing to maximize productivity. With the built-in dual-band 2.4G/5G Wi-Fi, the SIP-T31W ensures you keep up with the latest wireless technology and gain an advantage in the future wireless era. Working with the adjustable multi-angle stand, the T31W IP phone ensures you to work in different situations. Meanwhile, the T31W features built-in Power over Ethernet (PoE) and superb high-definition (HD) sound quality. Easy-to-use and powerful features together with a reasonable price deliver excellent voice communications solutions.



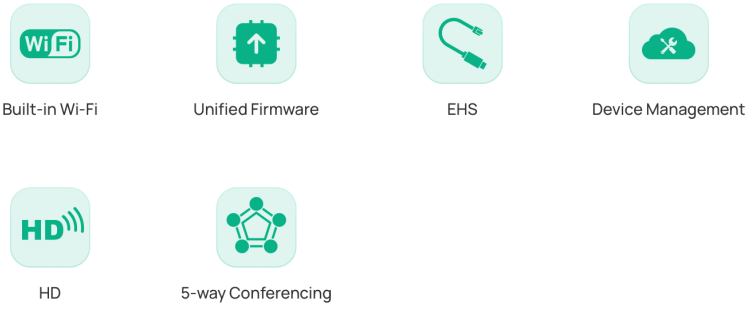


## Key Features and Benefits

- Built-in dual band 2.4G/5G Wi-Fi (802.11a/b/g/n/ac)
- Yealink HD Voice
- 2.3” 132x64-pixel graphical LCD with backlight
- Two-port 10/100M Ethernet Switch
- PoE support
- Up to 2 SIP accounts
- Local 5-way conferencing
- Support EHS Wireless Headset
- Unified Firmware
- Support YDMP/YMCS
- Stand with 2 adjustable angles
- Wall mountable

**Stronger Performance, More Possibilities**

Equipped with a powerful chip, the T3 series owns a stronger computing ability and more upgraded functions, which ensures higher productivity and a smoother office experience. Due to great performance, the T3 series is capable of extending more services for different business demands.

**Superior HD Audio, Better Communication**

The Yealink T3 series provides distraction-free communications with industry-leading Smart Noise Filtering Technology, which delivers excellent sound quality without extraneous noises and allows fluent conversations.

**Wireless Transmission**

In order to adapt to the upcoming era of 5G Wi-Fi, the SIP-T31W is equipped with dual-band Wi-Fi (Dual band). 5G Wi-Fi offers better anti-interference capabilities and faster speeds, allowing you to stay ahead in a busy data environment.

**All-in-One Platform, Convenient Management**

Proven reliability and integrations for Yealink Device Management Platform installed the unified firmware, T3 series is simple to deploy and manage, which allows a significant reduction in the operation and maintenance cost.

# Specifications

| Specifications | Description |
|---|---|
| Audio Features | • HD voice: HD handset, HD speaker<br>• Smart Noise Filtering<br>• Wideband codec: G.722<br>• Narrowband codec: PCMU(G.711μ), PCMA (G.711A), G.723.1, G.729, G.729A, G.729B, G.729AB, G.726, iLBC<br>• DTMF: In-band, Out-of-band (RFC 2833) and SIP INFO<br>• Full-duplex hands-free speakerphone with AEC<br>• VAD, CNG, AEC, PLC, AJB, AGC |
| Phone Features | • 2 VoIP accounts<br>• Call hold, mute, DND<br>• One-touch speed dial, hotline<br>• Call forward, call waiting, call transfer<br>• Group listening, SMS, emergency call<br>• Redial, call return, auto answer<br>• Local 5-way conferencing<br>• Direct IP call without SIP proxy |

| | |
|---|---|
| | • Ring tone selection/import/delete<br>• Set date time manually or automatically<br>• Dial plan<br>• XML Browser, action URL/URI<br>• Integrated screenshots<br>• RTCP-XR, VQ-RTCPXR<br>• Built-in dual-band Wi-Fi:<br>- Network standard: IEEE802.11a/b/g/n/ac<br>- Transmission rate: Up to 433Mbps (dynamic)<br>- Frequency range: 2.4GHz/5.0GHz<br>• Enhanced DSS Key |
| Directory | • Local phonebook up to 1000 entries<br>• Black list<br>• XML/LDAP remote phonebook<br>• Smart dialing<br>• Phonebook search/import/export<br>• Call history: dialed/received/missed/forwarded |
| IP-PBX Features | • Busy Lamp Field (BLF), Bridged Line Appearance(BLA)<br>• Anonymous call, anonymous call rejection<br>• Hot-desking, voice mail<br>• Flexible seating<br>• Call park, call pickup<br>• Executive and Assistant<br>• Centralized call recording<br>• Visual voice mail<br>• Call recording |
| Display and Indicator | • 2.3” 132x64-pixel graphical LCD with backlight<br>• LED for call and message waiting for indication<br>• Dual-color (red or green) illuminated LEDs for line status information<br>• Wallpaper<br>• Intuitive user interface with icons and soft keys<br>• Multilingual user interface<br>• Caller ID with name and number |

| | |
|---|---|
| | • Power saving |
| Feature keys | • 2 line keys with LED<br>• 6 features keys: transfer, message, headset, redial, mute, hands-free speakerphone<br>• 5 navigation keys<br>• Volume control keys |
| Interface | • 2 x RJ45 10/100M Ethernet ports<br>• Power over Ethernet (IEEE 802.3af), class 2<br>• 1 x RJ9 (4P4C) handset port<br>• 1 x RJ9 (4P4C) headset port |
| Other Physical Features | • Color: Classic Grey<br>• Wall mountable<br>• External Yealink AC adapter: AC 100-240 V input and DC 5 V/0.6 A output<br>• Power consumption (PSU): 1.3-1.7 W<br>• Power consumption (PoE): 2-2.6 W<br>• Dimension (W*D*H*T): 188 × 189 × 162 × 50 mm<br>• Operating humidity: 10~95%<br>• Operating temperature: -10 to +45°C (+14 to 113°F)<br>• Storage temperature: -30 to +70°C (-22 to +158°F) |
| Management | • Configuration: browser/phone/auto-provision<br>• Auto provision via FTP/TFTP/HTTP/HTTPS for mass deployment<br>• Auto-provision with PnP<br>• Zero-sp-touch, TR-069<br>• Phone lock for personal privacy protection<br>• Reset to factory, reboot<br>• Package tracing export, system log |
| Network and Security | • SIP v1 (RFC2543), v2 (RFC3261)<br>• Call server redundancy supported<br>• NAT traversal: STUN mode<br>• Proxy mode and peer-to-peer SIP link mode<br>• IP assignment: static/DHCP<br>• HTTP/HTTPS web server<br>• Time and date synchronization using SNTP |

| | |
|---|---|
| | • UDP/TCP/DNS-SRV (RFC 3263)<br>• QoS: 802.1p/Q tagging (VLAN), Layer 3 ToS DSCP<br>• SRTP for voice<br>• Transport Layer Security (TLS 1.3)<br>• HTTPS certificate manager<br>• AES encryption for configuration file (AES256)<br>• Digest authentication<br>• OpenVPN, IEEE802.1X<br>• IPv6<br>• LLDP/CDP/DHCP VLAN<br>• ICE<br>• WPA2/WPA3<br>• Secure boot<br>• GARP (Generic Attribute Registration Protocol) |
| Package Features | • Package content:<br>- Yealink SIP-T31W IP phone<br>- Handset with handset cord<br>- Ethernet Cable<br>- Stand (not applicable to US wall plate Standard)<br>- Quick Start Guide<br>- Power Adapter (optional)<br>• Qty/CTN: 10 PCS<br>• N.W/CTN: 9.536 kg<br>• G.W/CTN: 10.576 kg<br>• Giftbox size: 213 × 210 × 103 mm<br>• Carton Meas: 535 × 443 × 227 mm |
| Compliance | CE RCM FC RoHS REACH ISO 9001 c UL us<br>3CX broadsoft metaswitch |