
AutoFlow 3-Tier Governor

AN-3TIER-01
HOW IT WORKS
TIER 1 LOCAL CORE, TIER 2 BYOK BUS, TIER 3 0.5KB CARTRIDGE

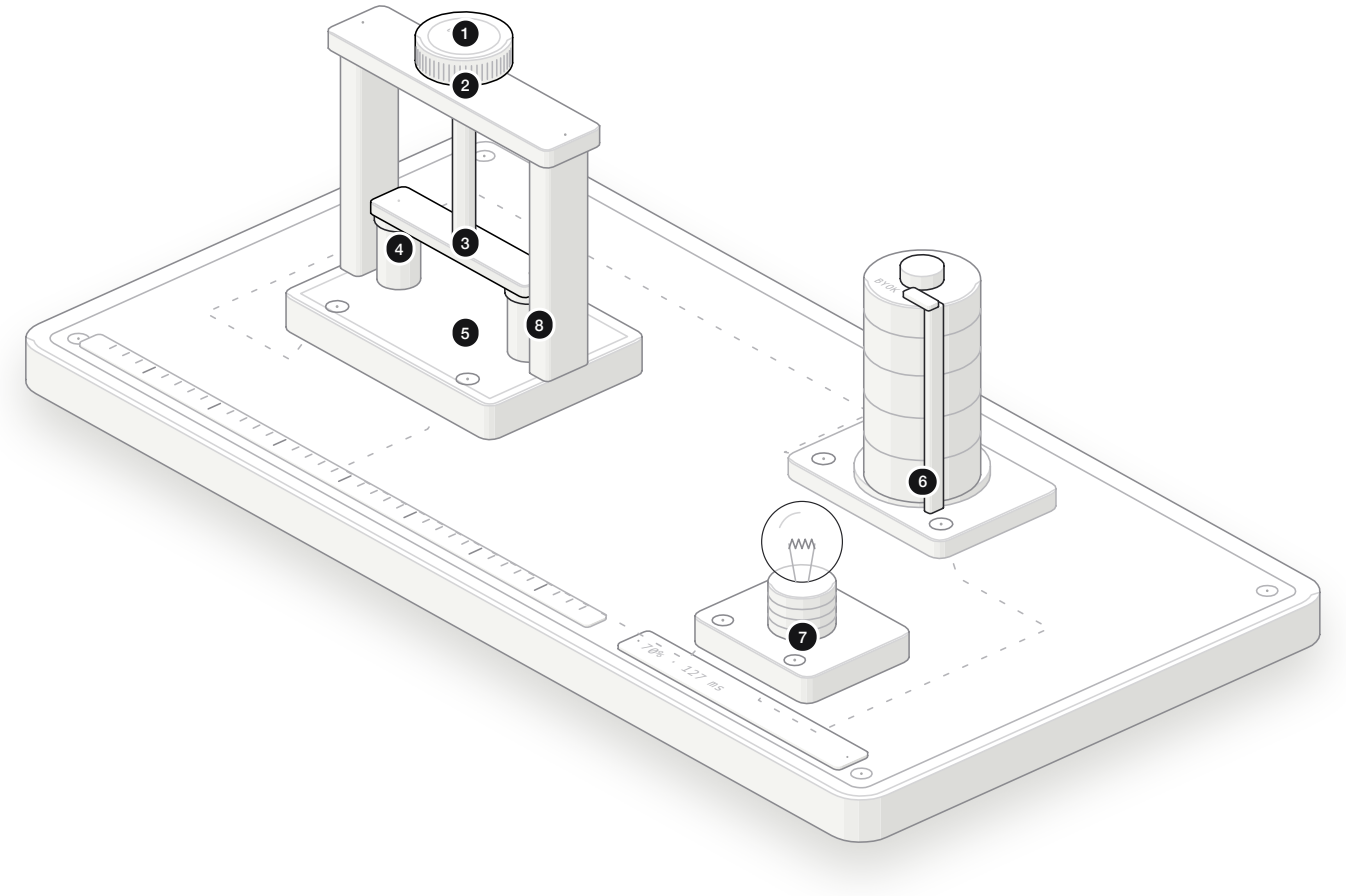

How does a 0.5KB cartridge hot-swap without restarting the engine?

Traditional cloud middleware drops orders when an API mutates or hits HTTP 429 rate limits. AutoFlow decouples execution into three physical tiers on 127.0.0.1:8080: Tier 1 enforces a 70% rate governor and 127 ms AST self-healing; Tier 2 stacks Lv.1 to Lv.4 modules with a 35% BYOK AI discount; and Tier 3 docks 0.5KB micro-defense cartridges over a 60-second heartbeat bridge.

127 ms
DETERMINISTIC AST RECOVERY

70 %
RATE GOVERNOR SPOOL THRESHOLD

35 %
BYOK AI DIRECT KEY DISCOUNT

0.5 KB
HOT-SWAP DEFENSE CARTRIDGE

01 **Tier 3 0.5KB Cartridge Cap**
Receives 60-second OTA/HQ/BYOK distilled patches and drives the hot-swap plunger.

02 **Isolation Return Spring**
Keeps the runtime bus isolated until a verified 0.5KB cartridge checksum latches.

03 **Atomic Hot-Swap Bridge**
Rides on the plunger to close the 8 px contact gap without dropping active jobs.

04 **127.0.0.1 Bus Terminals**
Dual local socket posts linking the cartridge ruleset to the Tier 1/Tier 2 loop.

05 **Sandbox Guide Frame**
Enforces deterministic memory bounds and 100% local PII masking.

06 **Tier 2 Lv.1~Lv.4 + BYOK Bus**
Cumulative module stack with direct customer AI key binding (~35% discount).

07 **Tier 1 127 ms Self-Healing Dome**
Illuminates when 70% rate governance and 127 ms AST payload healing are active.

08 **60s Heartbeat Conduit**
Tri-channel telemetry loop connecting Tier 1, Tier 2, and Tier 3 on premise.