


LP675776

UL1642 for Cell


UN38.3

- Typical Capacity: 3300 mAh
- Nominal Voltage: 3.7 V
- Weight: 55.1g
- BMS Overcharge Voltage: $4.28 \pm 0.05V$
- BMS Overdischarge Voltage: $3.0 \pm 0.1V$
- Max Charge Current: 2000 mA
- Max Loading Current (peak value): 2000 mA
- Max Loading Current (constant): 1000 mA
- Charge Temperature: $0 \sim 45^{\circ}C$
- Discharge Temperature: $-20 \sim +60^{\circ}C$
- Battery Protection Circuit (PCM) included

Connector
JST-PHR-02

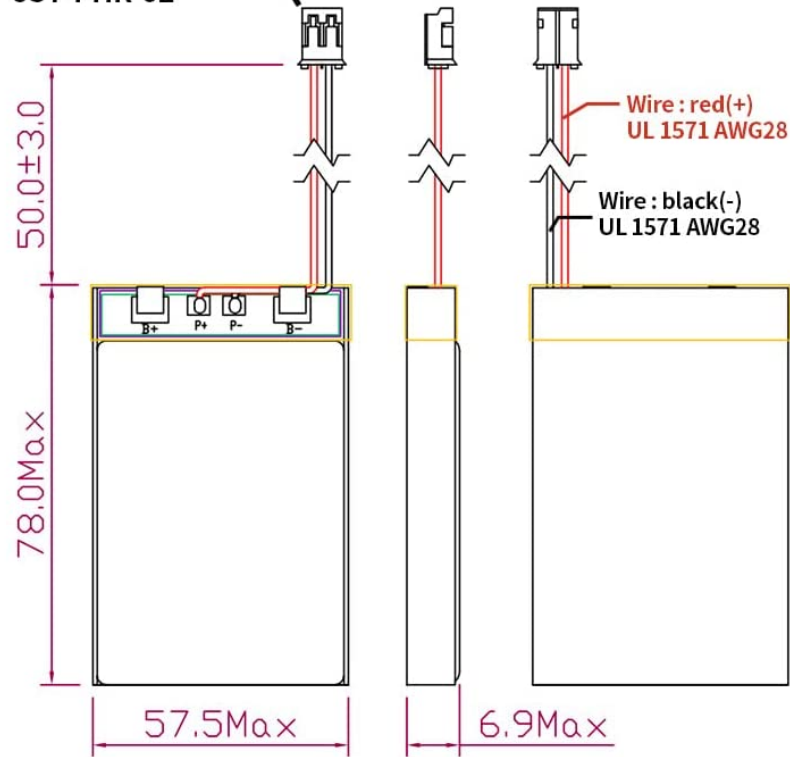

(Unit: mm)

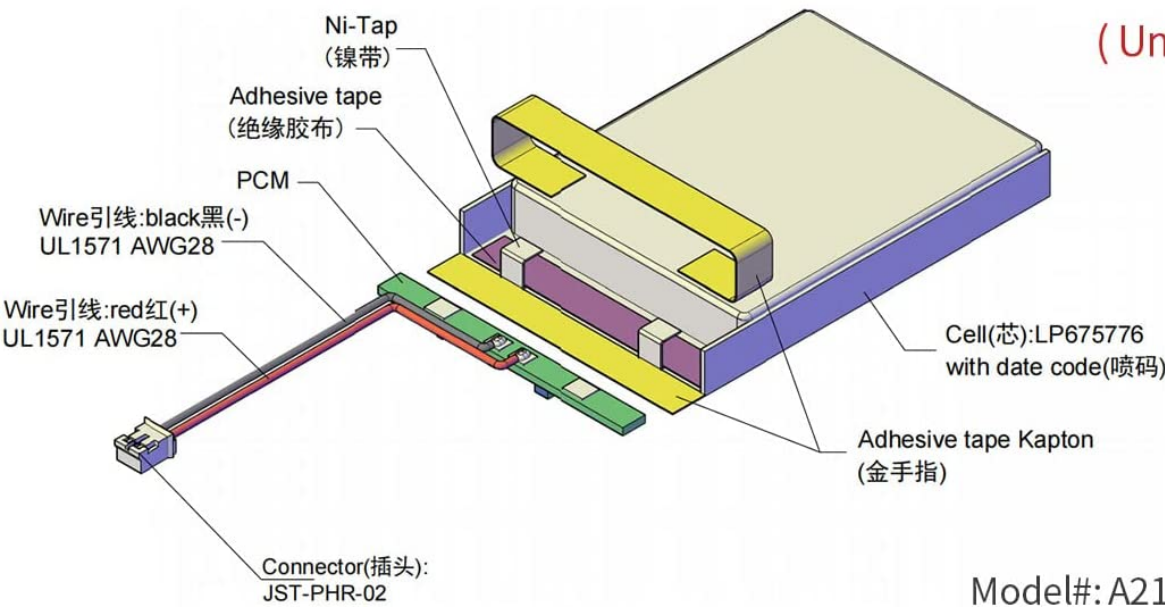

Model#: A21612-LP675776-PCM-LD-

ATTENTION!

Check the size, orientation and polarity of the connector before purchase.

W	57.5mm
H	6.9mm
L	78.0mm



Connector:
JST-PHR-02

5.8mm (0.228inch)

2mm (0.079inch)

