
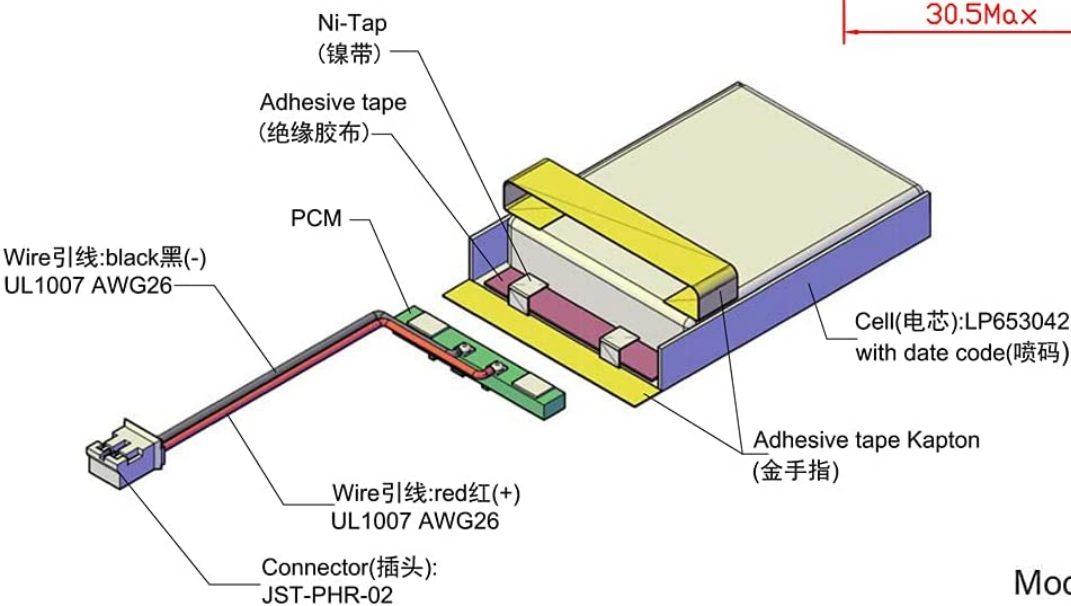


# LP653042

UL1642 for Cell

# UN38.3

- Typical Capacity: 820 mAh
- Nominal Voltage: 3.7 V
- Weight: 16.4g
- BMS Overcharge Voltage:  $4.28 \pm 0.05$  V
- BMS Overdischarge Voltage:  $3.0 \pm 0.1$  V
- Max Charge Current: 820 mA
- Max Loading Current (peak value): 1.6A
- Max Loading Current (constant): 0.8A
- Charge Temperature: 0 ~ 45 °C
- Discharge Temperature: -20 ~ +60 °C
- Battery Protection Circuit (PCM) included

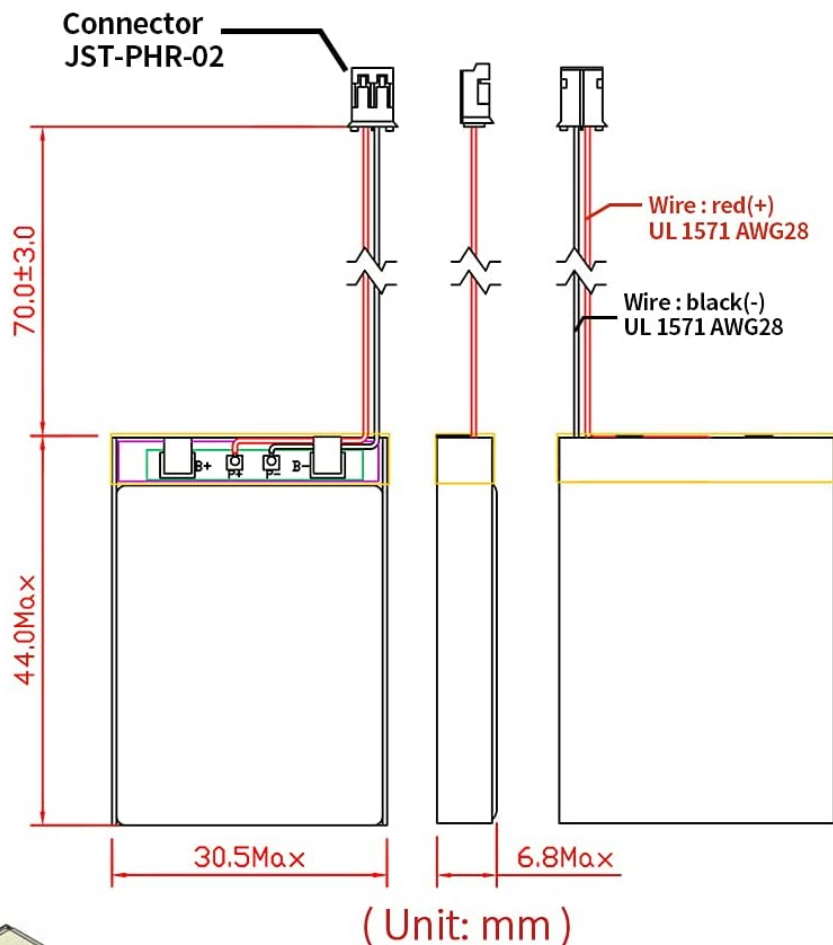

Model#: A10013-LP653042-PCM-LD-

# ATTENTION!

Check the size, orientation and polarity of the connector before purchase.

W	30.5mm
H	6.8mm
L	44mm



5.8mm (0.228inch)

2mm (0.079inch)

P+ P-

P- P+

Connector:JST-PHR-02