

# LP601730




# UN38.3


UL 1642 for Cell

- Typical Capacity: 260 mAh
- Nominal Voltage: 3.7 V
- Weight: 5.4g
- BMS Overcharge Voltage:  $4.28 \pm 0.05V$
- BMS Overdischarge Voltage:  $3.0 \pm 0.1V$
- Max Charge Current: 500 mA
- Max Loading Current (peak value): 500 mA
- Max Loading Current (constant): 250 mA
- Charge Temperature:  $0 \sim 45^{\circ}C$
- Discharge Temperature:  $-20 \sim +60^{\circ}C$
- Battery Protection Circuit (PCM) included

Connector  
JST-PHR-02

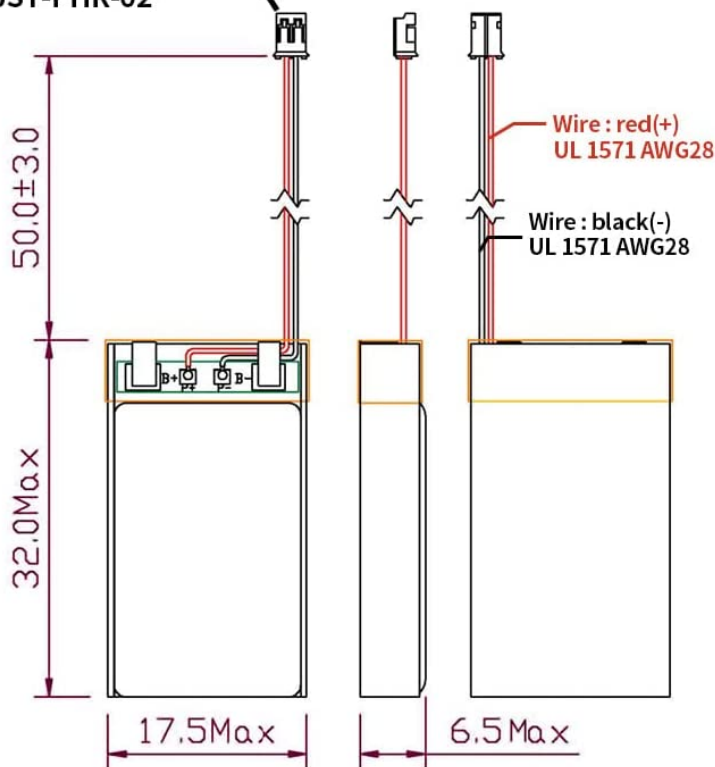

( Unit: mm )

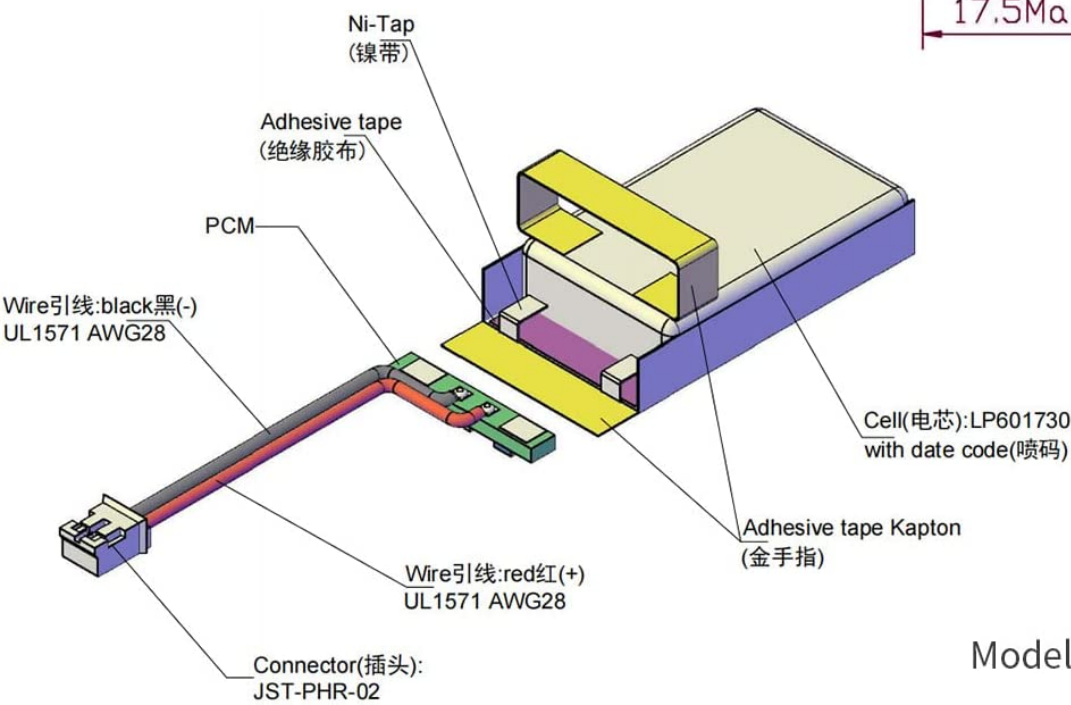


Model#: A21610-LP601730-PCM-LD-

# ATTENTION!

Check the size, orientation and polarity of the connector before purchase.

W	17.5mm
H	6.5mm
L	32.0mm

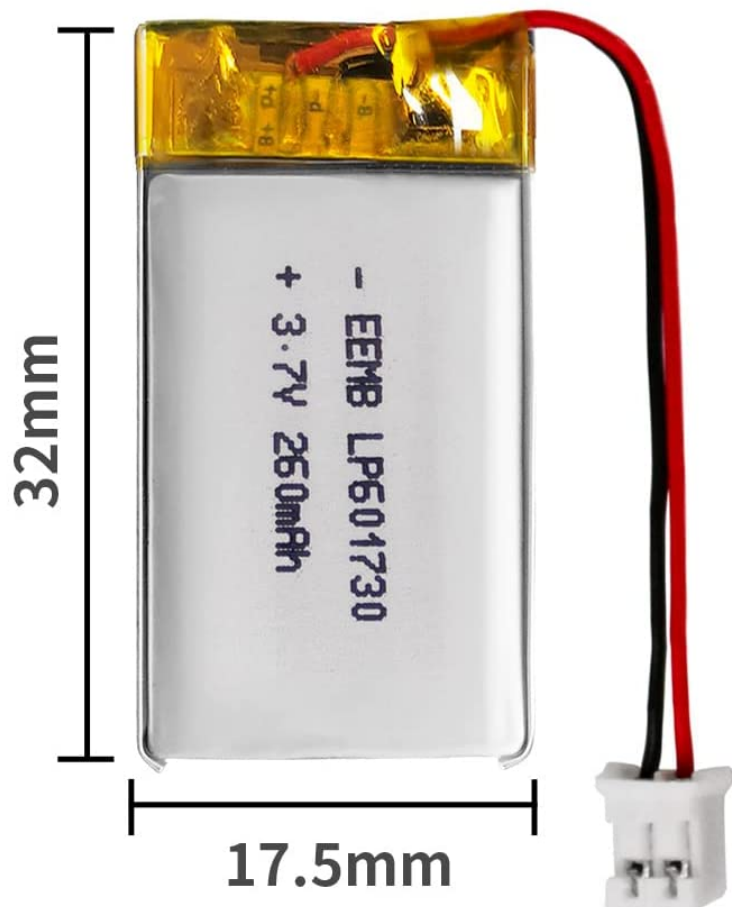

5.8mm (0.228inch)

2mm (0.079inch)

P+ P-

P- P+

Connector: JST-PHR-02