
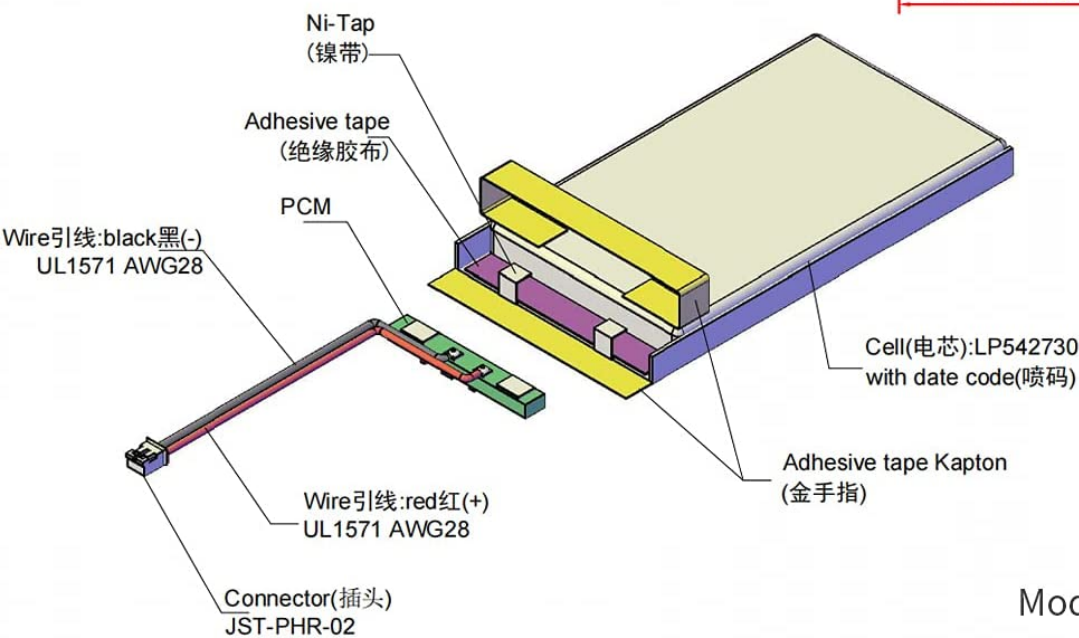


LP542730

UL
UL1642 for Cell

UN38.3

- Typical Capacity: 340 mAh
- Nominal Voltage: 3.7 V
- Weight: 7.6g
- BMS Overcharge Voltage: 4.28 ± 0.05 V
- BMS Overdischarge Voltage: 3.0 ± 0.1 V
- Max Charge Current: 340 mA
- Max Loading Current (peak value): 1.36A
- Max Loading Current (constant): 0.68A
- Charge Temperature: 0 ~ 45 °C
- Discharge Temperature: -20 ~ +60 °C
- Battery Protection Circuit (PCM) included

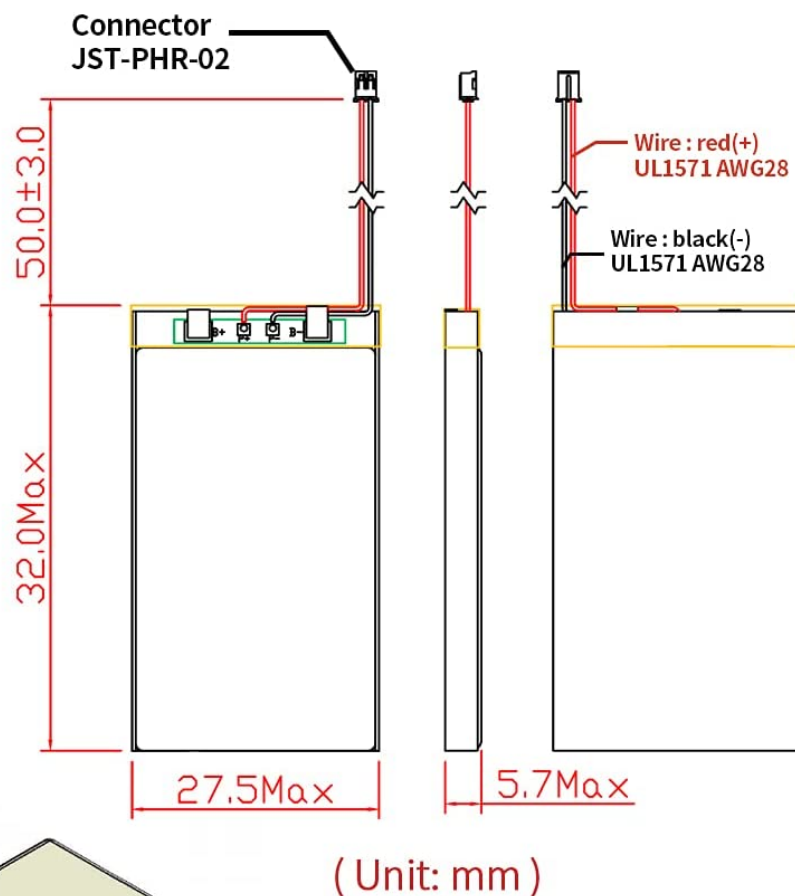


Model#: A21366-LP542730-PCM-LD-

ATTENTION!

Check the size, orientation and polarity of the connector before purchase.

W	27.5mm
H	5.7mm
L	32mm

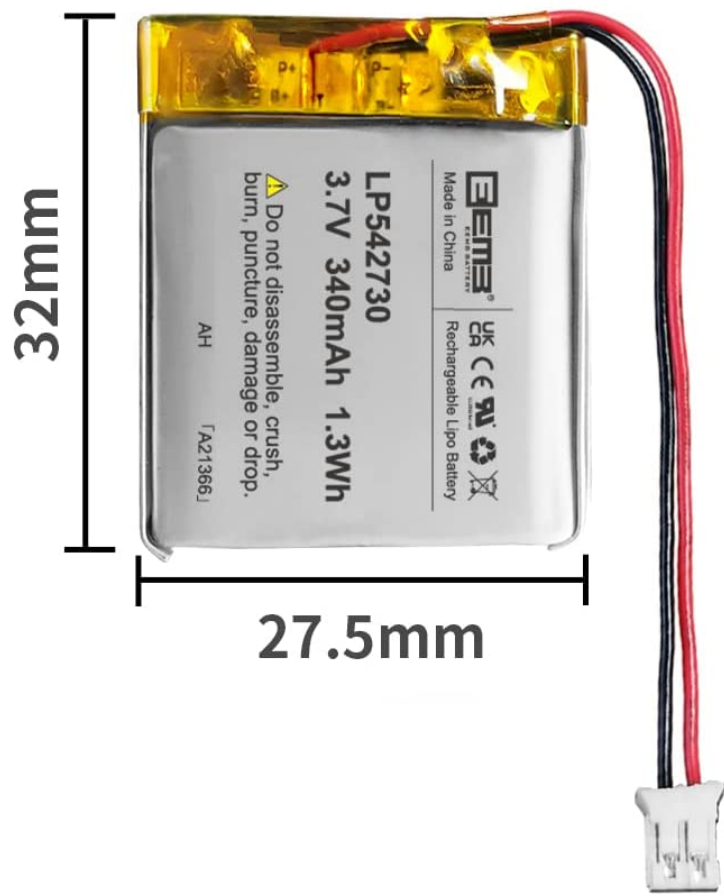

5.8mm (0.228inch)

2mm (0.079inch)

P+ P-

P- P+

Connector:JST-PHR-02