



LP803030

UN38.3

- Typical Capacity: 700 mAh
- Nominal Voltage: 3.7 V
- Weight: 13.0g
- BMS Overcharge Voltage: $4.28 \pm 0.05V$
- BMS Overdischarge Voltage: $3.0 \pm 0.1V$
- Max Charge Current: 1000 mA
- Max Loading Current (peak value): 1000 mA
- Max Loading Current (constant): 500 mA
- Charge Temperature: $0 \sim 45^{\circ}\text{C}$
- Discharge Temperature: $-20 \sim +60^{\circ}\text{C}$
- Battery Protection Circuit (PCM) included

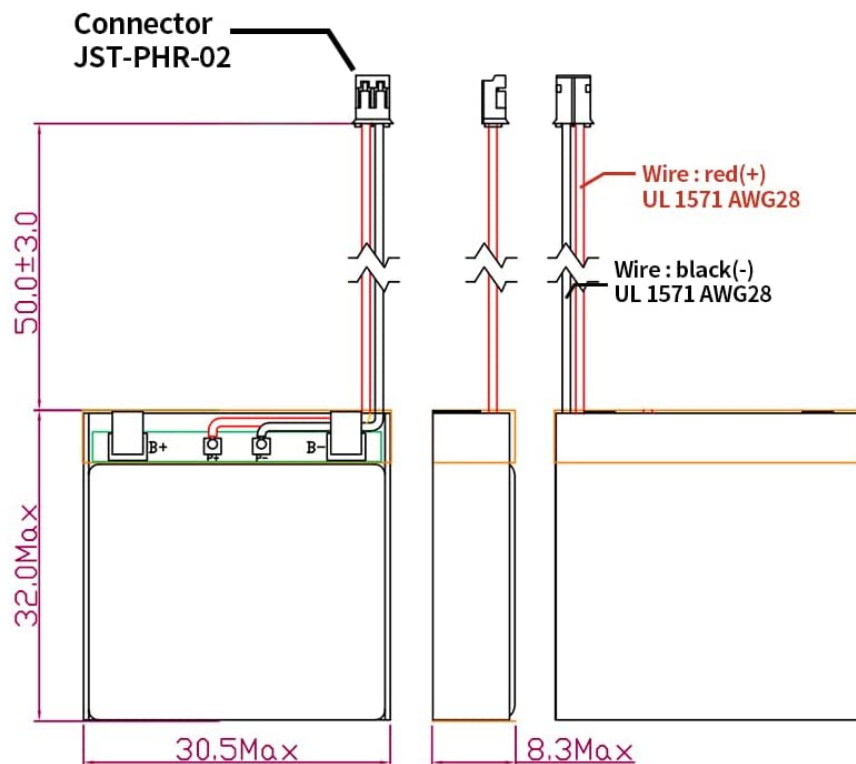

(Unit: mm)

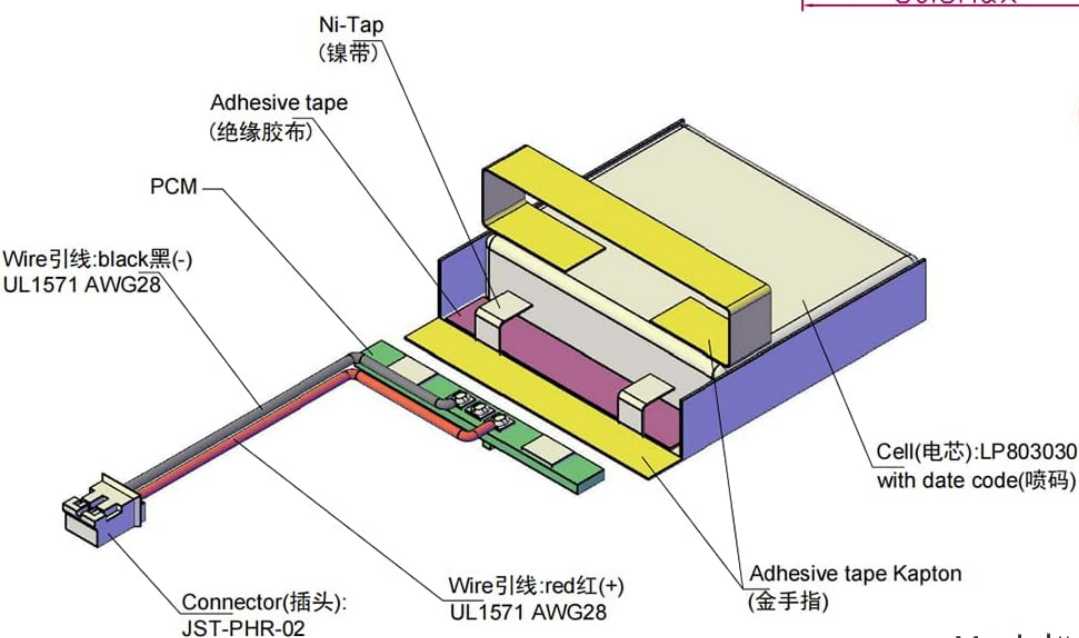


Model#: A21640-LP803030-PCM-LD-

ATTENTION!

Check the size, orientation and polarity of the connector before purchase.

W	30.5mm
H	8.3mm
L	32.0mm

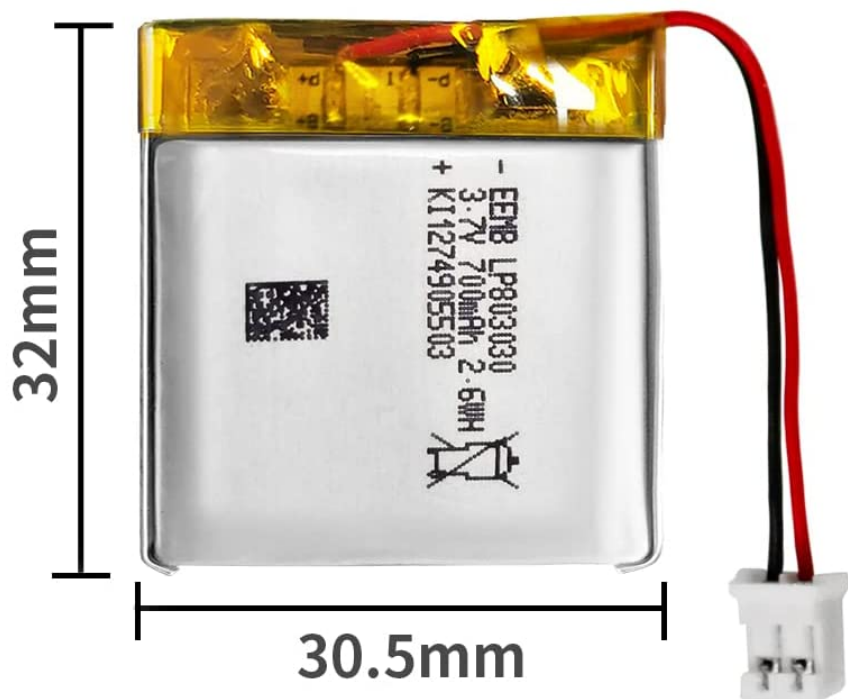

5.8mm (0.228inch)

2mm (0.079inch)

P+ P-

P- P+

Connector:JST-PHR-02