## Descripción

Denunciar artículo

### Descripción de la opción de compra

Las opciones anteriores son caudalimetros de turbina con diferentes diámetros.Los caudalimetros tienen las siguientes caracteristicas.

1. 【12 ~ 24 VCC 】 fuente de alimentación
2. 【Rosca macho】 conexión
3. 【Ancho】 salida de señal.

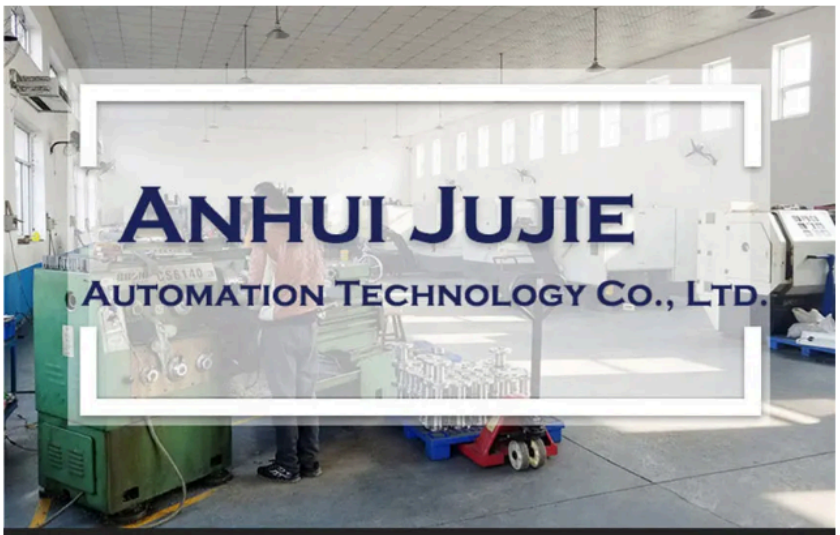


Product Display

## Detalles

| | | | |
|---|---|---|---|
| Producto químico de alta preocupación | Ninguno | Modelo de JUJIE | GTLWGY |
| Tamaño del Diámetro del Tubo de Unión | 1" | Tipo de acoplamiento | Rosca BSPT macho |
| Rango de medición | 1~10m3/h | Número de modelo | GTLWGY |
| Suministros para Bricolaje | Fontanería | Nombre de la marca | JUJIE |
| Origen | CN(Origen) | Certificación | certificado |
| Medium | clean liquid | Power supply | 12~24VDC |
| Output | pulse | Accuracy | ±0.5% |
| Withstand pressure | 6.3MPa | Temperature | -100~100℃ |
| Material | SS304 | | |

## PRODUCT PARAMETER

| | | | |
|---|---|---|---|
| Meter Diameter(mm) Connection Mode | Threaded connections | DN4~DN50 | Sensor :SS304 (SS316L) Impeller:2Cr13 |
| | Flange connections | DN15~DN200 | Sensor :SS304 (SS316L) Impeller:2Cr13 |
| | Clamp connections | DN4~DN100 | Sensor :SS304 (SS316L) Impeller:2Cr13 |
| Precision | DN4~DN10:±1.0%R; DN15~DN100:±0.5%R; DN125~DN200:±1.0%R | | |
| Ratio of Measuring Range | 1:10 | | |
| Instrument Material | Sensor :SS304 (SS316L); Impeller:2Cr13; Guide: SS304; Bearing: YS8 Alloy (special material can be customized) | | |
| Conditions of use | Environment temperature:-30°C~60°C | | |
| | Medium temperature:-100°C~100°C/120°C/150°C | | |
| Pressure Level | Threaded connections:2.5~6.3MPa(High pressure can be customized) | | |
| | Flange connections:1.6~4.0MPa (High pressure can be customized) | | |
| | Clamp connections: 1.0MPa | | |
| Power Supply | 3.6V lithium battery (can be used continuously for 2 years) /12~24VDC (Data remote transmission) | | |
| Power Consumption | ≤1W | | |
| Signal Output | Pulse, 4~20mA, equivalent pulse | | |
| Communication Output | RS485 communication(Modbus-RTU) | | |
| Signal Interface | Internal thread M20*1.5 (NPT1/2, etc needs to be customized) | | |
| Protection Level | IP65 ( IP68 can be customized) | | |
| Explosion-proof Level | ExdIICT6 Gb | | |
| Display | LCD instantaneous flow, accumulative flow unit($m^3$/h;L/min;L/h;Kg/h;Kg/min;GPM) settable | | |

## FLOW RANGE

| Diameter(mm) | Standard flow range($m^3$/h) | Extended flow range($m^3$/h) | Standard pressure rating(MPa) |
|---|---|---|---|
| DN4 | 0.04-0.25 | 0.04-0.4 | 6.3 |
| DN6 | 0.1-0.6 | 0.06-0.6 | 6.3 |
| DN10 | 0.2-1.2 | 0.15-1.5 | 6.3 |
| DN15 | 0.6-6 | 0.4-8 | 6.3 |
| DN20 | 0.8-8 | 0.45-9 | 6.3 |
| DN25 | 1-10 | 0.5-10 | 6.3 |
| DN32 | 1.5-15 | 0.8-15 | 6.3 |
| DN40 | 2-20 | 1-20 | 6.3 |
| DN50 | 4-40 | 2-40 | 2.5 |
| DN65 | 7-70 | 4-70 | 1.6 |
| DN80 | 10-100 | 5-100 | 1.6 |
| DN100 | 20-200 | 10-200 | 1.6 |
| DN125 | 25-250 | 13-250 | 1.6 |
| DN150 | 30-300 | 15-300 | 1.6 |

## FLOWMETER SIZE

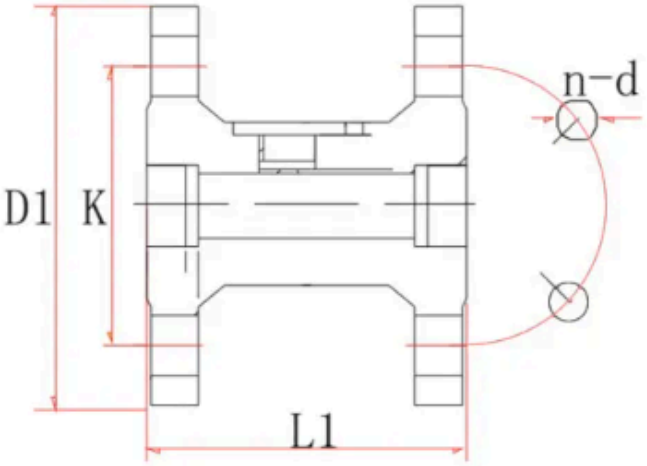


Flange Connection Type
DN15-DN200

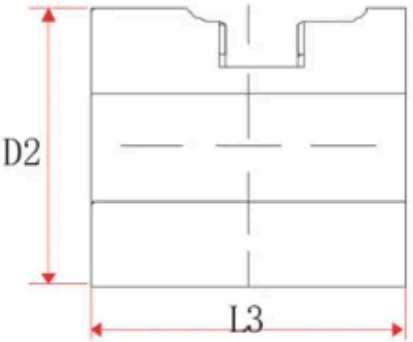


Clamp Flange Connection Type
DN4-DN200

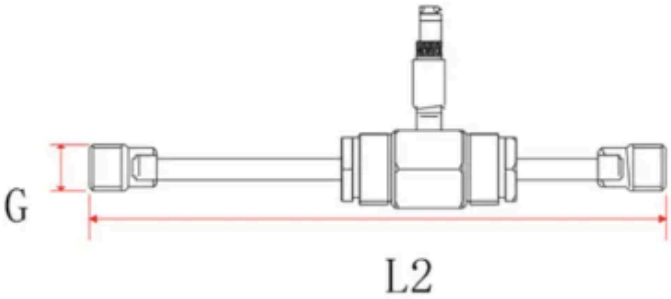


Threaded Connection Type
DN4-DN10

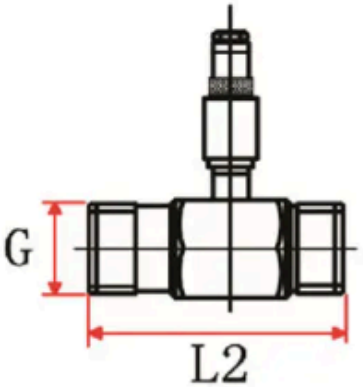


Threaded Connection Type
DN15-DN50

| | Flange connections | | | | | Threaded connections | |
|---|---|---|---|---|---|---|---|
| Diameter | L1 | D1 | K | d | n(Number of holes) | L2 | G( External thread ) |
| 4 | | | | | | 225 | G1/2 |
| 6 | | | | | | 225 | G1/2 |
| 10 | | | | | | 345 | G1/2 |
| 15 | 75 | 95 | 65 | 14 | 4 | 75 | G1 |
| 20 | 80 | 105 | 75 | 14 | 4 | 80 | G1 |
| 25 | 100 | 115 | 85 | 14 | 4 | 100 | G5/4 |
| 32 | 140 | 140 | 100 | 18 | 4 | 140 | G3/2 |
| 40 | 140 | 150 | 110 | 18 | 4 | 140 | G2 |
| 50 | 150 | 165 | 125 | 18 | 4 | 150 | G5/2 |
| 65 | 170 | 185 | 145 | 18 | 4 | | |
| 80 | 200 | 200 | 160 | 18 | 8 | | |
| 100 | 220 | 220 | 180 | 18 | 8 | | |
| 125 | 250 | 250 | 210 | 18 | 8 | | |
| 150 | 300 | 285 | 240 | 22 | 8 | | |
| 200 | 360 | 340 | 295 | 22 | 12 | | |

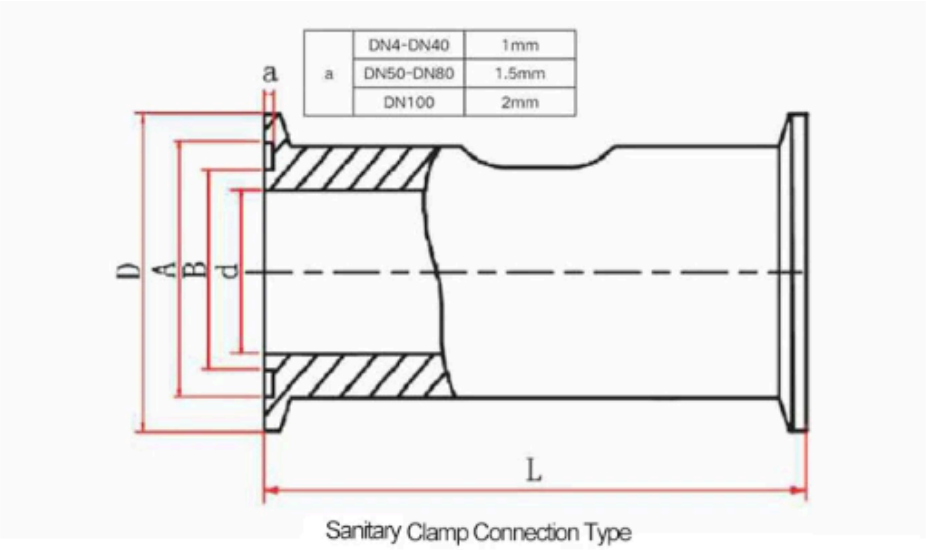


Sanitary Clamp Connection Type
DN4-DN100

| Diameter | D(mm) | A(mm) | B(mm) | d(mm) | L(mm) |
|---|---|---|---|---|---|
| DN4 | 50.5 | 46 | 40.5 | 4 | 100 |
| DN6 | | | | 6 | |
| DN10 | | | | 10 | |
| DN15 | | | | 15 | |
| DN20 | | | | 20 | |
| DN25 | | | | 25 | |
| DN32 | | | | 32 | 120 |
| DN40 | 64 | 59 | 53.5 | 40 | 140 |
| DN50 | 78 | 73.5 | 68 | 50 | 150 |
| DN65 | 91 | 86 | 80.5 | 65 | 170 |
| DN80 | 106 | 100.5 | 94 | 80 | 200 |
| DN100 | 119 | 113 | 106 | 100 | 220 |

# LWGY-N type

| |
|---|
| Signal Output : Pulse signal (NPN/TTL ≤0.8V, ≥8V ) |
| Power Supply : 12~24VDC |
| Accuracy Level : ±0.5% / ±1.0% |
| Flow Range : Normal flow range (Extended range) |
| Body Material : Normal SS304 (SS316L) |
| Medium Temperature : -100~100℃ (120℃/150℃ ) |
| Environment Temperature : -30~60℃ |
| Display : None |

# INSTALLATION

| Inlet section choke type | Installation conditions | | | Installation conditions | |
|---|---|---|---|---|---|
| | Entrance section | Exit segment | | Entrance section | Exit segment |
| General situation | Flow direction 流动方向 | 10×DN | 5×DN | Two 90° elbows in the same plane | Flow direction 流动方向 | 20×DN | 5×DN |
| Two 90° elbows in the same plane | Flow direction 流动方向 | 25×DN | 5×DN | Two 90° elbows in different planes | Flow direction 流动方向 | 40×DN | 5×DN |
| Shrink tube | Flow direction 流动方向 | 15×DN | 5×DN | Expansion | Flow direction 流动方向 | 20×DN | 5×DN |
| Full open valve | Flow direction 流动方向 | 20×DN | 5×DN | Half open valve | Flow direction 流动方向 | 50×DN | 5×DN |

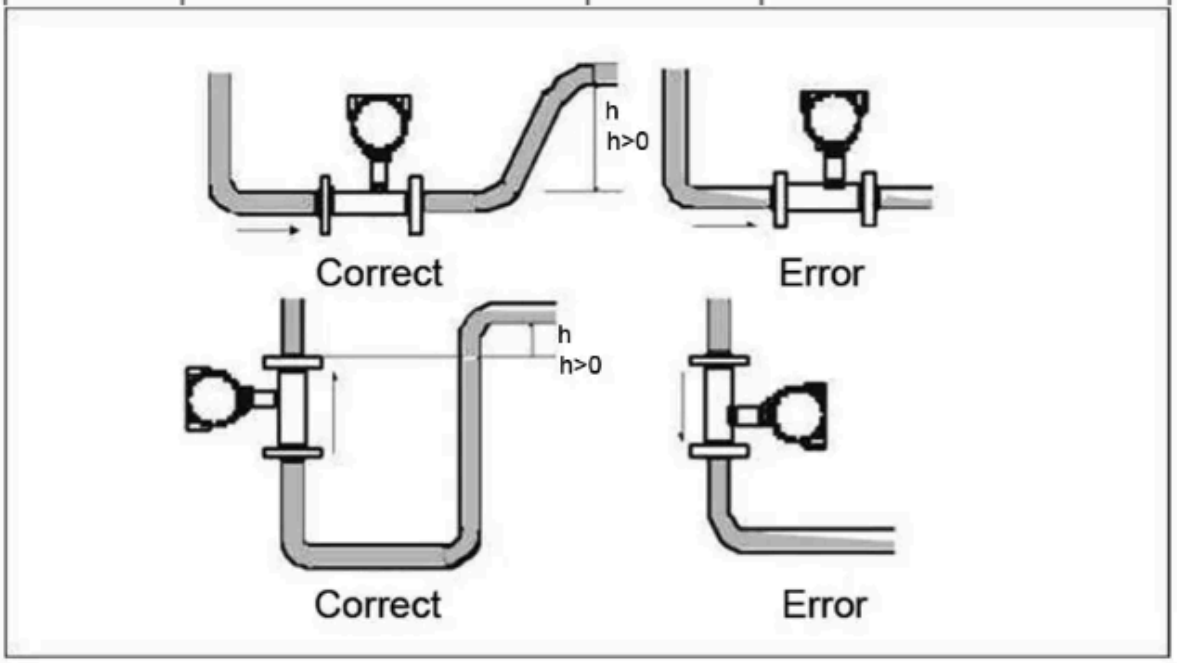

# Certificate