





TRIPLE STACK PUMPING STATION 3X20 GPM, Model PS3H25 LESS TANK





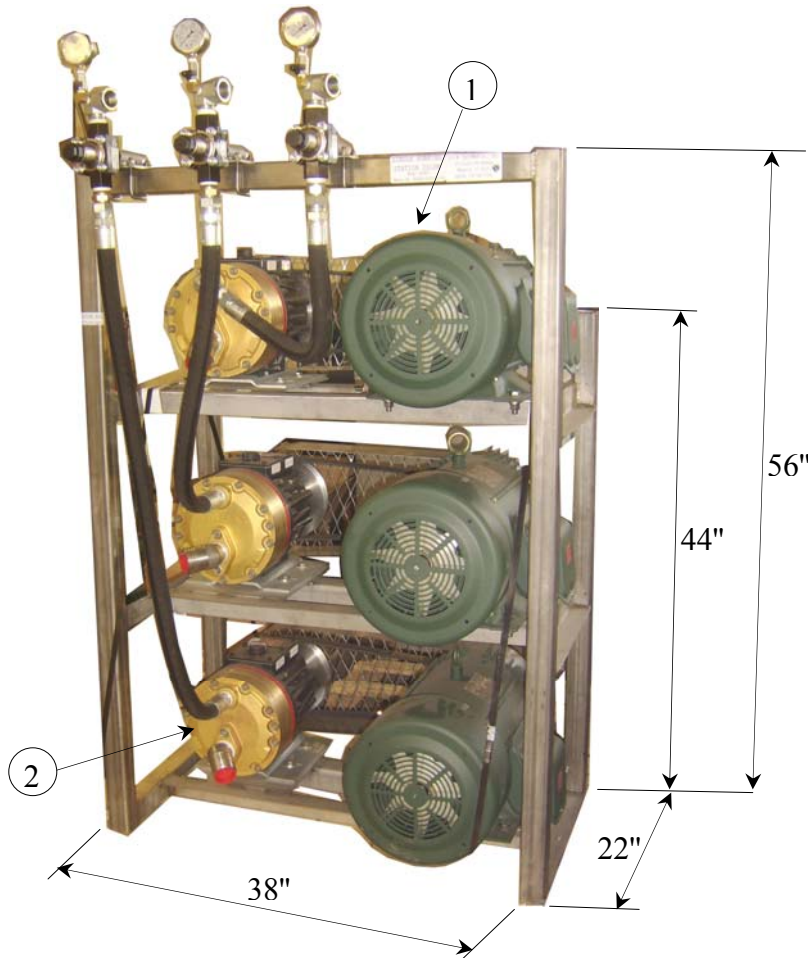

TRIPLE STACK PUMPING STATION 3 X 20 GPM Model PS3H25 Less TANK

| Item | PART NAME | A.V.W. PART No. | | Qty |
|------|--|---------------------|--|-----|
| 1 | "RELIANCE SABRE" ELECTRICAL MOTOR 15HP 1750RPM C-Face, Frame 254T (Shaft Dia. 1 ⁵ / ₈ ") Volts 230/460, Amps 36/18, Type P, 60 Hz, 3 Phase TEFC Enclosure, Power Factor 87.5 NEMA Nom. Efficiency 91 Guaranteed Efficiency 89.5 | EM15-1800 |  | 3 |
| 2 | "HYDRA-CELL" PUMP, displacement 4.017 [cu.in./rev.] 20GPM max. at 1150RPM max. (For this AVW Pumping Station: 19.02GPM at 1094RPM & 1085PSI) inlet port 1 ¹ / ₂ "NPT, discharge port 1"NPT, shaft dia. Ø1-1/8" (use 10W30 hydra-oil), "WANNER ENGINEERING" | PSH25-P20 |  | 3 |
| - | 12° BARB (HOSE NIPPLE) 2" x 1 ¹ / ₂ " NPT male (mounted to Pump's inlet), stainless steel | BRB200X150 (12°) |  | 3 |



A.V.W. Equipment Co. Inc. 105 South 9th Avenue, Maywood, IL 60153

| | | | | | |
|-------------|---|--|--------------------------------|--|-------------|
| - | MOTOR PULLEY 5.00" O.D. "APEX" |  | PSH25-MP-5.00 | | 2 |
| Item | PART NAME | | A.V.W. PART No. | | Qty. |
| - | PUMP PULLEY, 8.00" O.D. |  | PSH25-MP-8.00 | | 3 |
| - | V-BELT 60" LG. (center distance 19 3/4") |  | PSH25-XV-600 | | 9 |
| - | SPLIT TAPER BUSHING 1-5/8", for motor shaft SPLIT TAPER BUSHING 1-1/8", for pump shaft |  | PSH25-MB-0806 PSH25-PB-0806 | | 3 3 |

LESS TANK:

| | | | | |
|----|---|--------------------------|--|--------|
| 9 | STAND | PS2H25-A | | 1 |
| - | Fittings | - | | - |
| 11 | DISCHARGE HOSE (PRESSURE LINE) 1" I.D. x LG. 1" I.D. x LG w/Crimp Fittings: one side-male, other side-female <input type="checkbox"/> Aeroquip | PS2H25-DHU PS2H25-DHL | | 3 |
| - | CRIMP FITTINGS 1" (For Discharge Hose) -Male (Aeroquip") -Female ("Aeroquip") | | | 3 3 |



A.V.W. Equipment Co. Inc. 105 South 9th Avenue, Maywood, IL 60153