


A

B

VIEW A

... 4 x MTP ...

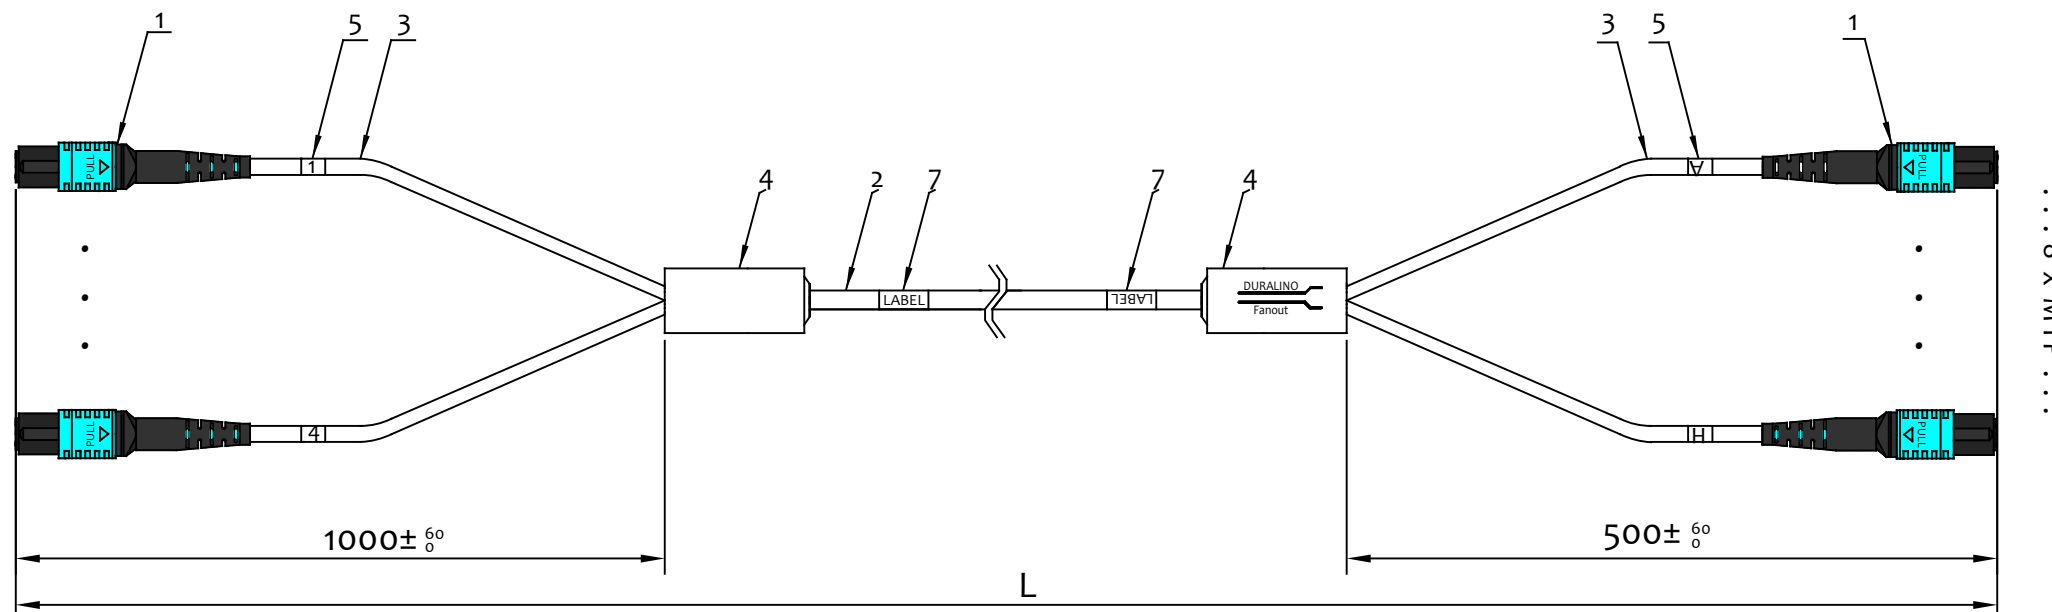

LENGTH TOLERANCE		
Length interval(m)	Tolerance(m)	
0 - 0,99	+	0,06
	-	0
1 - 7,99	+	0,11
	-	0
8 - 19,99	+	0,18
	-	0
20 - 49,99	+	0,23
	-	0
50 - 99,99	+	0,50
	-	0
100 - 199,99	+	1,00
	-	0
200 - 299,99	+	1,50
	-	0
> 300	+	3,00
	-	0


CONNECTION TABLE		
MTP 12F - 1	MTP 8F	
1	1	A
2	2	
3	3	
4	4	
5	5	
6	6	B
7	7	
8	1	
9	2	
10	3	
11	4	
12	5	

CONNECTION TABLE		
MTP 12F - 2	MTP 8F	
1	1	C
2	2	
3	3	
4	4	
5	5	
6	6	D
7	7	
8	1	
9	2	
10	3	
11	4	
12	5	

CONNECTION TABLE		
MTP 12F - 3	MTP 8F	
1	1	E
2	2	
3	3	
4	4	
5	5	
6	6	F
7	7	
8	1	
9	2	
10	3	
11	4	
12	5	


CONNECTION TABLE		
MTP 12F - 4	MTP 8F	
1	1	G
2	2	
3	3	
4	4	
5	5	
6	6	H
7	7	
8	1	
9	2	
10	3	
11	4	
12	5	

CABLE PROFILE VIEW

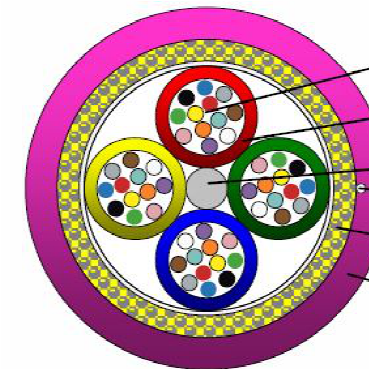


- Optical fibre
- Unfilled loose tube
- Central strength member
- Ripcord
- Strain relief elements
- FRNC – outer jacket

VIEW A





BOM		
NO:	DESCRIPTION	QTY
1.	MTP(F) MM 12F 3.0mm AQ CONNECTOR	12
2.	MICROBUNDLE CABLE 5.7mm, 48F OM3 AQ	L
3.	SIMPLEX AQ TUBING	12
4.	DURALINO S w LOGO	2
5.	INFORMATION LABEL	12
6.	BUBBLE FOIL	not shown
7.	TRACEABILITY LABEL	2

INFORMATION
LABEL (POS. 5)

NOTES :

- 1 - DUST CAPS ARE INCLUDED, BUT NOT SHOWN
- 2 - IL<0.35dB, RL>20dB, PER CONNECOR, 850 & 1300nm
- 3 - ALWAYS CHECK CONNECTION WITH LASER FOR MT CONNECTORS
- 4 - PACKAGING SPECIFICATION:: 1-S-0011

TRACEABILITY
LABEL VN-023 (POS. 7)

REVISION-DATE: A - 25.06.2018	CHANGE:	DRAWN BY, DATE: M.Ruzbarsky 2018/06/25	TITLE: 04x MTP(F) - 08x MTP(F) 48F OM4 TRUNK		
New drawing		CHECKED BY, DATE: Pavlov/Matus			
REVISION-DATE:	CHANGE:	APPROVED BY, DATE: I.Brestovanska	PRODUCT SPECIFICATION: -	DIMENSIONS IN MM UNLESS SPECIFIED	SCALE: NO SCALE
REVISION-DATE:	CHANGE:	<div></div> PRODUCT NUMBER: -	DRAWING NUMBER: -	SHEET NO. 1 of 1	
		<div>A</div>	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO SYLEX s.r.o AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		
			SIZE A3		