



1. Description

1.1. Project

Project Name	SBR-PID
Board Name	NUCLEO-F446RE
Generated with:	STM32CubeMX 6.2.1
Date	06/21/2021


1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F446
MCU name	STM32F446RETx
MCU Package	LQFP64
MCU Pin number	64

1.3. Core(s) information

Core(s)	Arm Cortex-M4
---------	---------------

2. Pinout Configuration

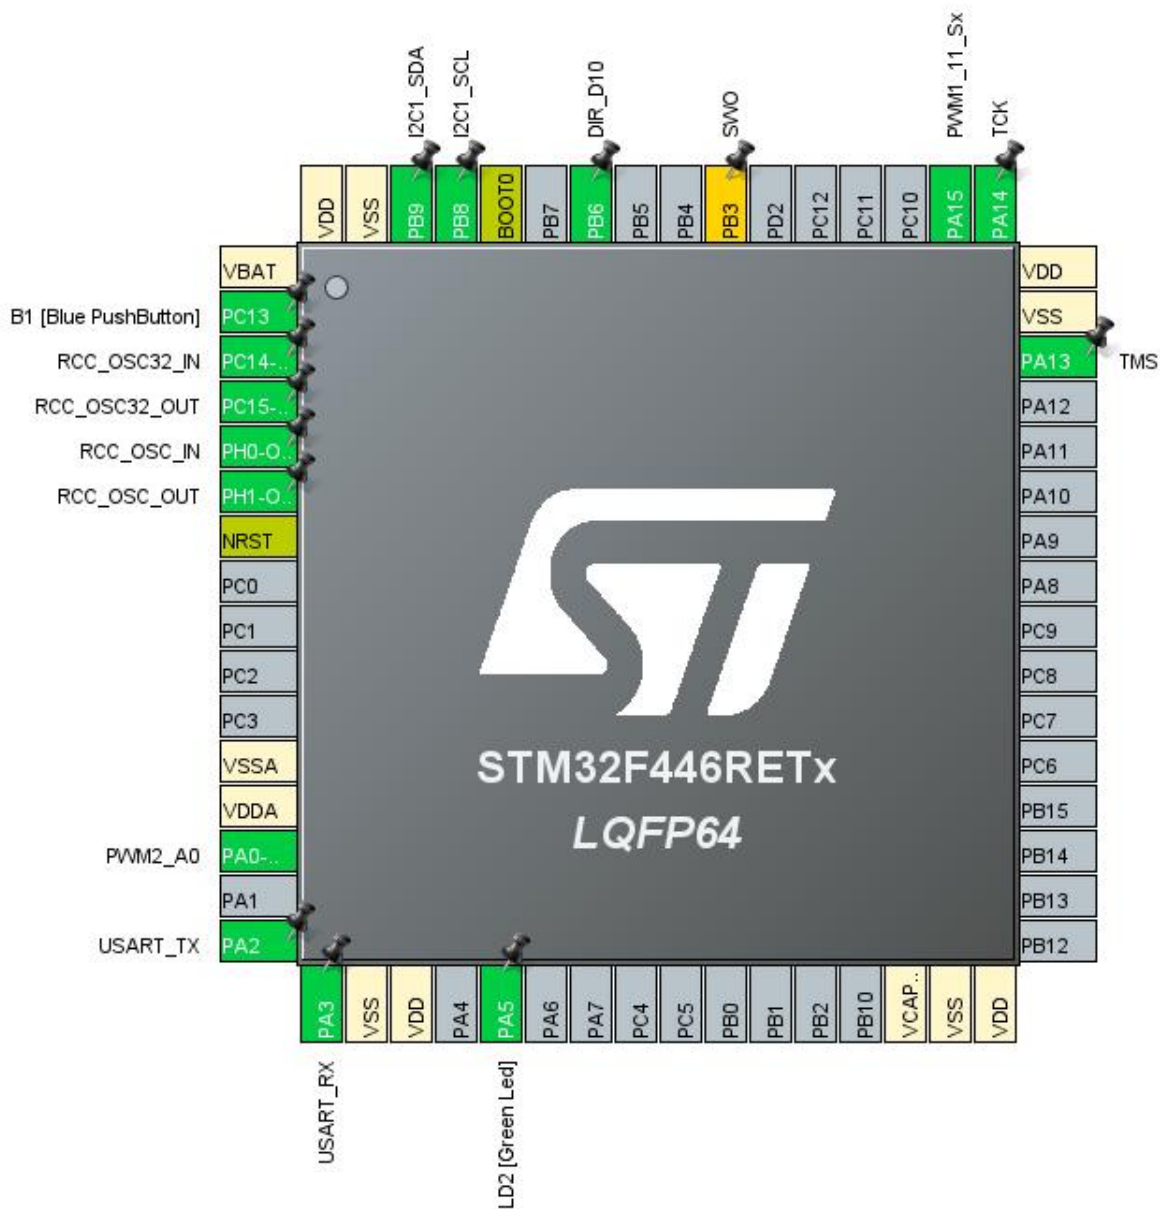


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13	I/O	GPIO_EXTI13	B1 [Blue PushButton]
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PH0-OSC_IN	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
14	PA0-WKUP	I/O	TIM5_CH1	PWM2_A0
16	PA2	I/O	USART2_TX	USART_TX
17	PA3	I/O	USART2_RX	USART_RX
18	VSS	Power		
19	VDD	Power		
21	PA5 *	I/O	GPIO_Output	LD2 [Green Led]
30	VCAP_1	Power		
31	VSS	Power		
32	VDD	Power		
46	PA13	I/O	SYS_JTMS-SWDIO	TMS
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	TCK
50	PA15	I/O	TIM2_CH1	PWM1_11_Sx
55	PB3 **	I/O	SYS_JTDO-SWO	SWO
58	PB6 *	I/O	GPIO_Output	DIR_D10
60	BOOT0	Boot		
61	PB8	I/O	I2C1_SCL	
62	PB9	I/O	I2C1_SDA	
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

** The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

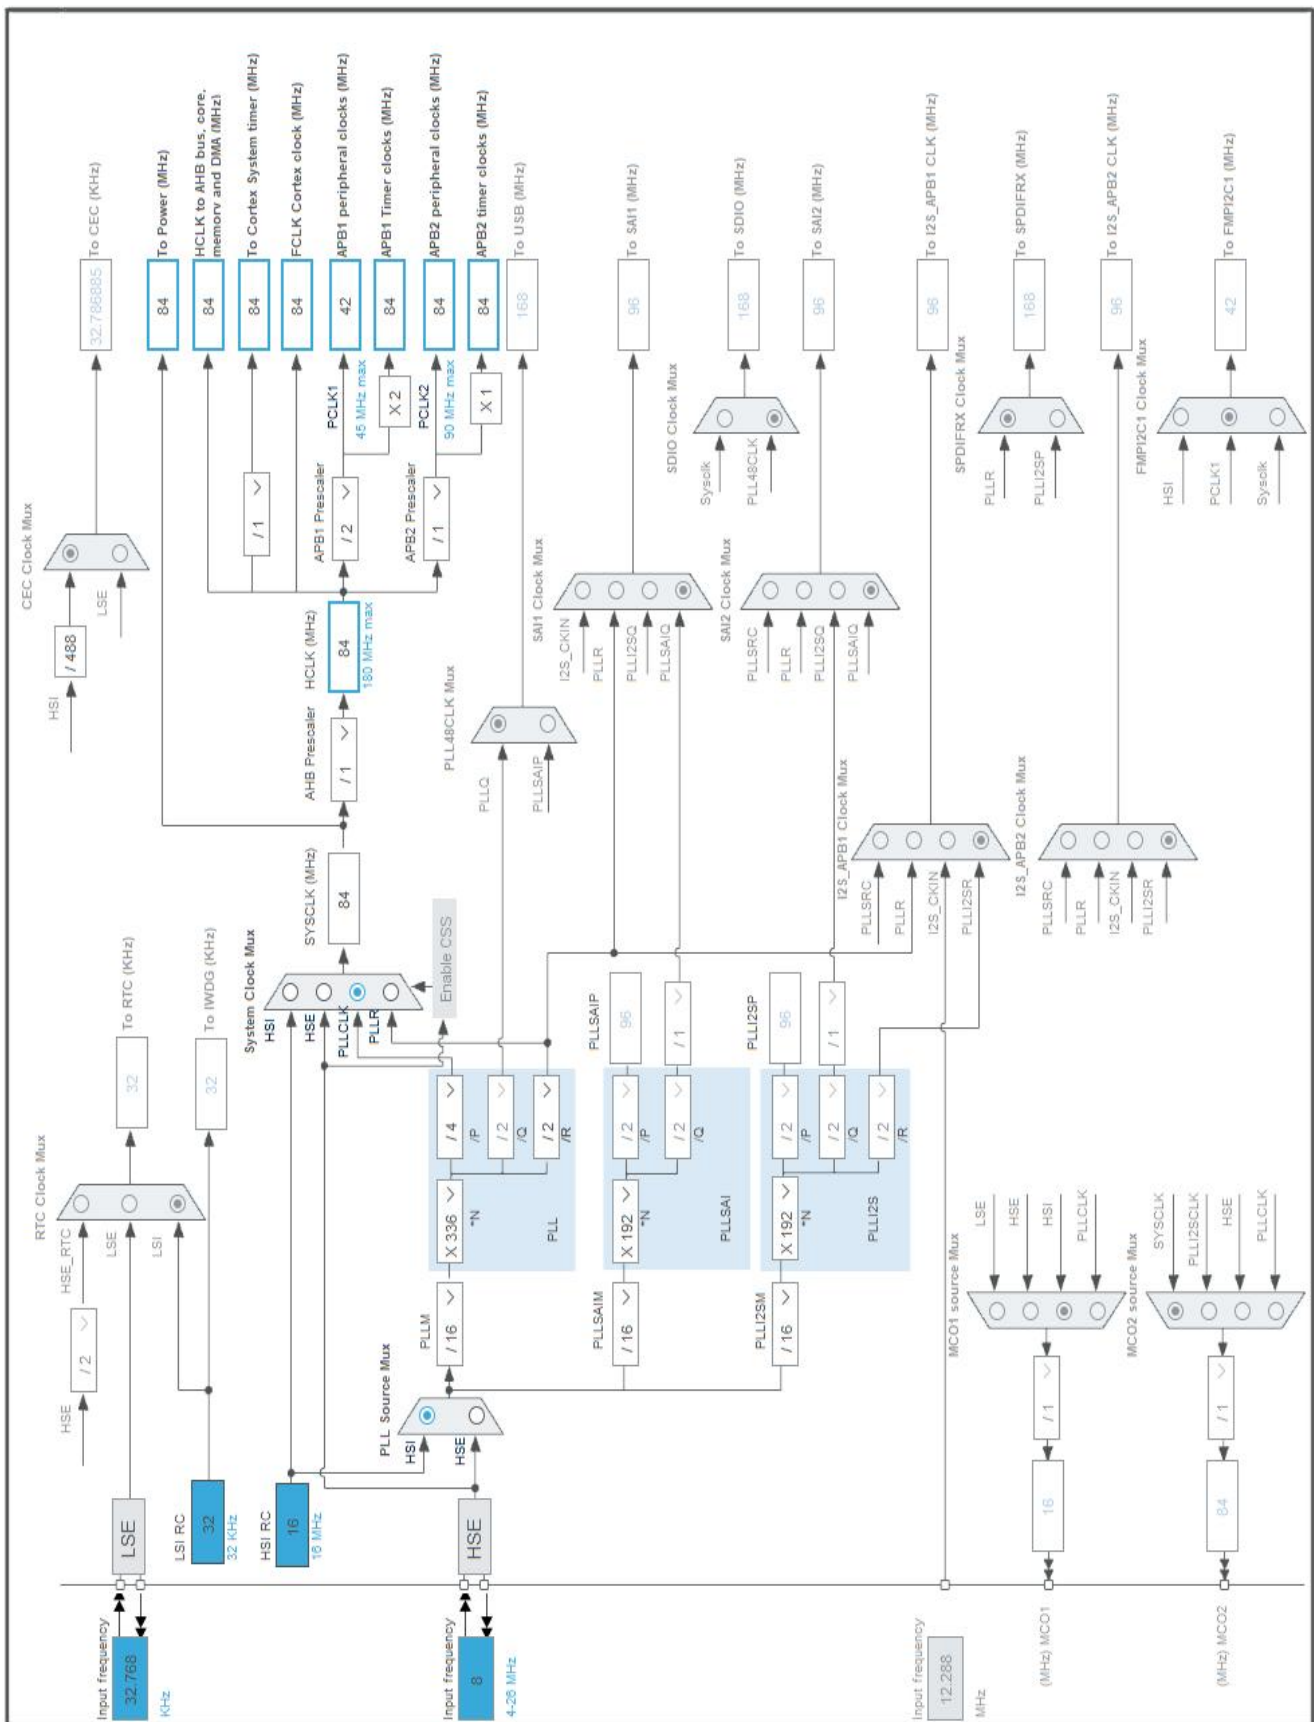

5. Software Project

5.1. Project Settings

Name	Value
Project Name	SBR-PID
Project Folder	C:\Users\gmeid\STM32CubeIDE\workspace3\SBR-PID
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_F4 V1.26.1
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

5.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	MX_GPIO_Init	GPIO
2	SystemClock_Config	RCC
3	MX_USART2_UART_Init	USART2
4	MX_TIM2_Init	TIM2
5	MX_TIM5_Init	TIM5
6	MX_TIM10_Init	TIM10
7	MX_TIM11_Init	TIM11
8	MX_I2C1_Init	I2C1

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F446
MCU	STM32F446RETx
Datasheet	DS10693_Rev6

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP UDM (Under Drive)
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	RAM/FLASH/REGON/ART/P REFETCH	n/a
CPU Frequency	180 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	46 mA	55 μ A
Duration	0.1 ms	0.9 ms
DMIPS	225.0	0.0
Ta Max	98.02	104.99
Category	In DS Table	In DS Table

6.5. Results

Sequence Time	1 ms	Average Current	4.65 mA
Battery Life	1 month	Average DMIPS	225.0 DMIPS

6.6. Chart

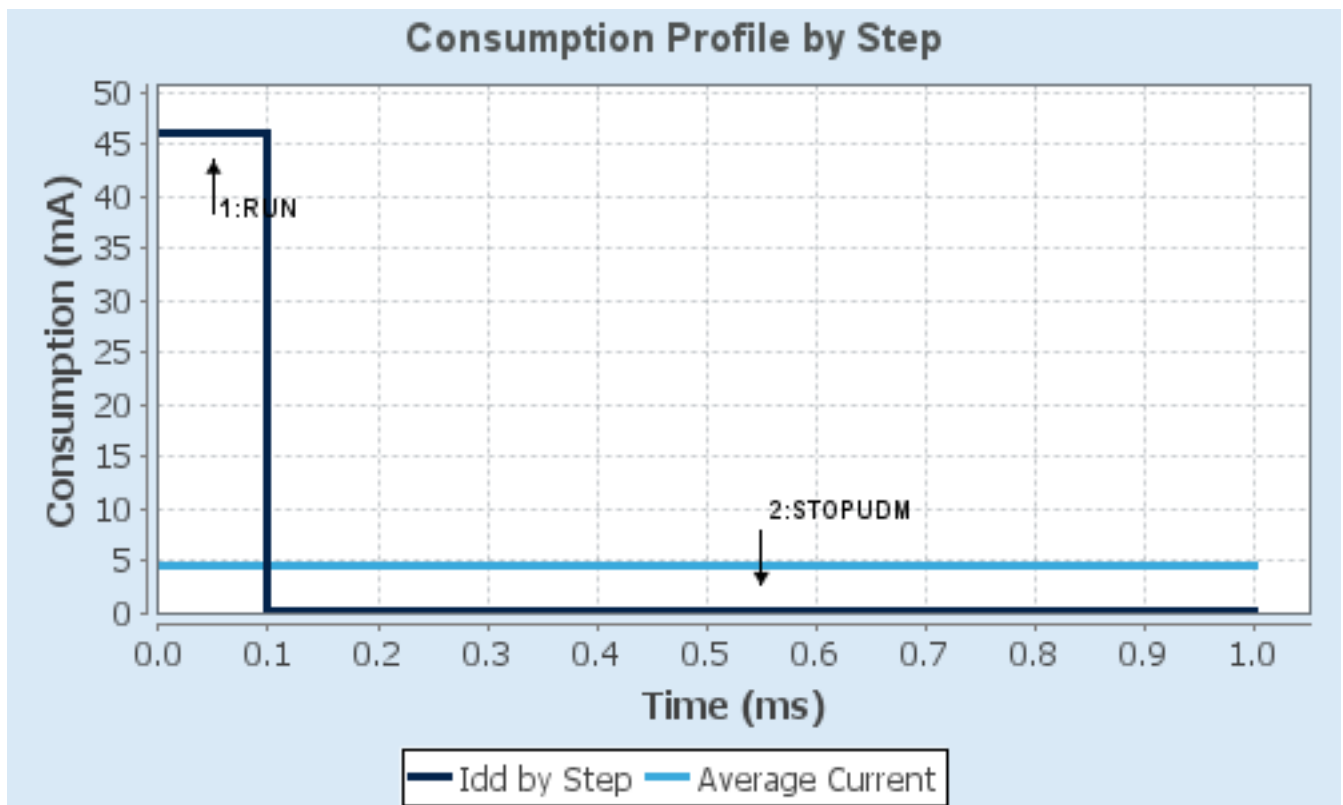

7. Peripherals and Middlewares Configuration

7.1. I2C1

I2C: I2C

7.1.1. Parameter Settings:

Master Features:

I2C Speed Mode	Standard Mode
I2C Clock Speed (Hz)	100000

Slave Features:

Clock No Stretch Mode	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0
General Call address detection	Disabled

7.2. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

7.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 3
Power Over Drive	Disabled

7.3. SYS

Debug: Serial Wire

Timebase Source: SysTick

7.4. TIM2

Channel1: PWM Generation CH1

7.4.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value)	0 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (32 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High

7.5. TIM5

Channel1: PWM Generation CH1

7.5.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Counter Period (AutoReload Register - 32 bits value)	0 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection	Reset (UG bit from TIMx_EGR)

PWM Generation Channel 1:

Mode	PWM mode 1
Pulse (32 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High

7.6. TIM10

mode: Activated

7.6.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	4 - 1 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	42000 - 1 *
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

7.7. TIM11

mode: Activated

7.7.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	8400 - 1 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
auto-reload preload	Disable

7.8. USART2

Mode: Asynchronous

7.8.1. Parameter Settings:

Basic Parameters:

Baud Rate	2000000 *
Word Length	8 Bits (including Parity)

Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Transmit Only *
Over Sampling	16 Samples

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
I2C1	PB8	I2C1_SCL	Alternate Function Open Drain	Pull-up	Very High *	
	PB9	I2C1_SDA	Alternate Function Open Drain	Pull-up	Very High *	
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	TMS
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	TCK
TIM2	PA15	TIM2_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	PWM1_11_Sx
TIM5	PA0-WKUP	TIM5_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	PWM2_A0
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_TX
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	USART_RX
Single Mapped Signals	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	SWO
GPIO	PC13	GPIO_EXTI13	External Interrupt Mode with Falling edge trigger detection	No pull-up and no pull-down	n/a	B1 [Blue PushButton]
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LD2 [Green Led]
	PB6	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	DIR_D10

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

8.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
TIM1 update interrupt and TIM10 global interrupt	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM1 trigger and commutation interrupts and TIM11 global interrupt	unused		
TIM2 global interrupt	unused		
I2C1 event interrupt	unused		
I2C1 error interrupt	unused		
USART2 global interrupt	unused		
EXTI line[15:10] interrupts	unused		
TIM5 global interrupt	unused		
FPU global interrupt	unused		

8.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false
Memory management fault	false	true	false
Pre-fetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
TIM1 update interrupt and TIM10 global interrupt	false	true	true

* User modified value

9. System Views

9.1. Category view

9.1.1. Current

Middleware

System Core

Analog

Timers

Connectivity

Multimedia

Computing

DMA

GPIO 

IIVIC 

RCC 

SYS 

TIM2 

TIM5 

TIM10 

TIM11 

I2C1 

USART2 

10. Docs & Resources

Type	Link
Datasheet	http://www.st.com/resource/en/datasheet/DM00141306.pdf
Reference manual	http://www.st.com/resource/en/reference_manual/DM00135183.pdf
Programming manual	http://www.st.com/resource/en/programming_manual/DM00046982.pdf
Errata sheet	http://www.st.com/resource/en/errata_sheet/DM00155929.pdf
Application note	http://www.st.com/resource/en/application_note/CD00167594.pdf
Application note	http://www.st.com/resource/en/application_note/CD00211314.pdf
Application note	http://www.st.com/resource/en/application_note/CD00249778.pdf
Application note	http://www.st.com/resource/en/application_note/CD00259245.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264321.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264342.pdf
Application note	http://www.st.com/resource/en/application_note/CD00264379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00024853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00040802.pdf
Application note	http://www.st.com/resource/en/application_note/DM00040808.pdf
Application note	http://www.st.com/resource/en/application_note/DM00042534.pdf
Application note	http://www.st.com/resource/en/application_note/DM00046011.pdf
Application note	http://www.st.com/resource/en/application_note/DM00072315.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073742.pdf
Application note	http://www.st.com/resource/en/application_note/DM00073853.pdf
Application note	http://www.st.com/resource/en/application_note/DM00080497.pdf
Application note	http://www.st.com/resource/en/application_note/DM00081379.pdf
Application note	http://www.st.com/resource/en/application_note/DM00115714.pdf
Application note	http://www.st.com/resource/en/application_note/DM00129215.pdf
Application note	http://www.st.com/resource/en/application_note/DM00154959.pdf
Application note	http://www.st.com/resource/en/application_note/DM00160482.pdf

Application note http://www.st.com/resource/en/application_note/DM00161778.pdf

Application note http://www.st.com/resource/en/application_note/DM00213525.pdf

Application note http://www.st.com/resource/en/application_note/DM00220769.pdf

Application note http://www.st.com/resource/en/application_note/DM00227538.pdf

Application note http://www.st.com/resource/en/application_note/DM00257177.pdf

Application note http://www.st.com/resource/en/application_note/DM00272912.pdf

Application note http://www.st.com/resource/en/application_note/DM00226326.pdf

Application note http://www.st.com/resource/en/application_note/DM00236305.pdf

Application note http://www.st.com/resource/en/application_note/DM00281138.pdf

Application note http://www.st.com/resource/en/application_note/DM00296349.pdf

Application note http://www.st.com/resource/en/application_note/DM00327191.pdf

Application note http://www.st.com/resource/en/application_note/DM00354244.pdf

Application note http://www.st.com/resource/en/application_note/DM00373474.pdf

Application note http://www.st.com/resource/en/application_note/DM00315319.pdf

Application note http://www.st.com/resource/en/application_note/DM00380469.pdf

Application note http://www.st.com/resource/en/application_note/DM00395696.pdf

Application note http://www.st.com/resource/en/application_note/DM00431633.pdf

Application note http://www.st.com/resource/en/application_note/DM00493651.pdf

Application note http://www.st.com/resource/en/application_note/DM00536349.pdf

Application note http://www.st.com/resource/en/application_note/DM00725181.pdf