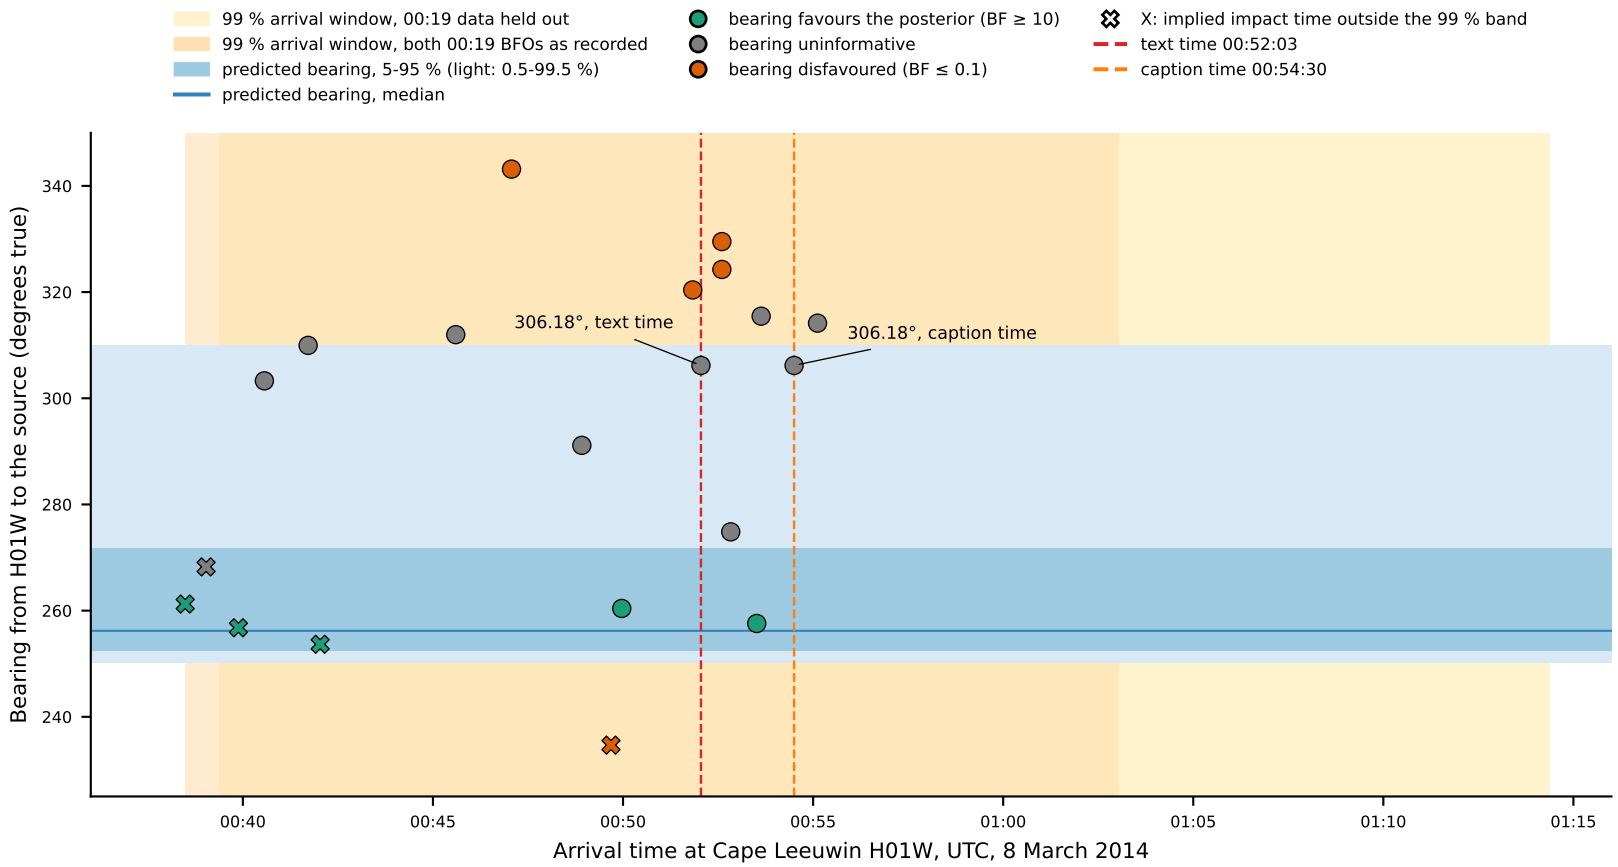

(i) What the chart shows: each dot is one of the 19 signals in Kadri's Table 1 (time and direction at Cape Leeuwin). The blue band is the direction in which the aircraft is predicted to lie. The yellow band is the time span in which its sound would arrive. A dot is credible only if it is inside both. Three dots inside the blue band arrive too early for an impact after 00:19:29 (X); two (00:49:58, 00:53:31) fit both; the rest point further north. The 306° row is uninformative on this impact set, not disfavoured as on the earlier stand-in.

(ii) Source posterior run J (waypoints seeds 1-8 every 6th row + northern supplement at share 0.125), D0' p = 0.5; back-azimuth mass in 0.5° bins; Bayes factor = sum_k m_k f(bearing - baz_k) / (1/360), f = Student-t(3) with sd 3.3° (demonstrated error model; claimed Gaussian 0.4° in the table). Implied impact time = arrival - range/1.482 km/s with the range to the bearing line's arc crossing (block-2 arcfit). Table 1 EXTRACTED from Kadri (2024) Sci. Rep. 14:10102; bearings not reproducible from the published single channel. Caveats C1, C2; pre-registration a4cdab0; PREDICTIVE, NOT CALIBRATED.