A real F-35A arrival added to Wake Island background is found half the time at 0.065 Pa (north) and 0.048 Pa (south); an arrival at the level Kadri read would have been found 77-85 % of the time

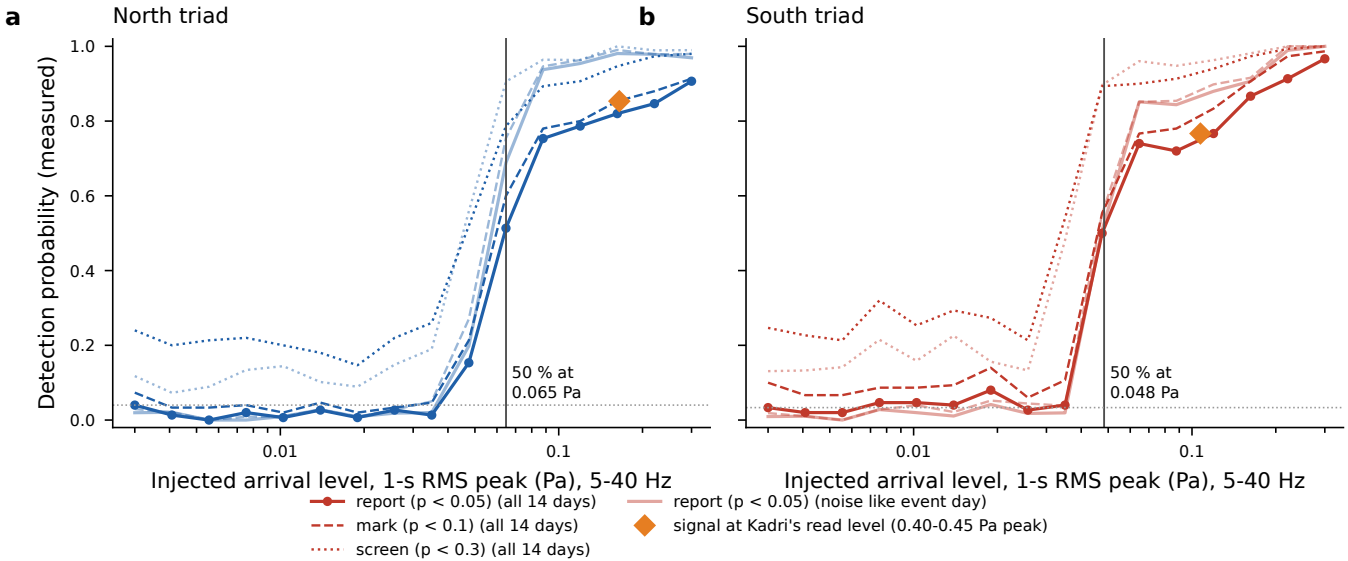

(i) Plain language. We added the recorded F-35A sound, made weaker or stronger, to 14 days of Wake Island background and ran the same detector. The curves show how often it found the added sound. At the vertical line it found it half of the time. The diamond is a sound as loud as the one read from the published plot.
(ii) Technical. Injection: F-35A raw H11N1/H11S1 5-40 Hz waveform, [peak-35, peak+15] s, plane-wave delays for 81.07°/79.22° at 1.482 km/s, peak uniform in a 90-s window; 150 injections per level per triad, 16 levels 0.003-0.3 Pa; background windows 2021-06-25..07-09 except 07-02, 11:31:10-13:28 UTC. Detection = module M1b p < threshold against the pre-registered null (n = 1,240-1,250 windows). 50 % level from a logistic fit with floor = P(p<0.05 | no injection) (grey dotted, 0.03-0.04). Faint curves: windows with median noise within 1.5 dB of the event day (sensitivity, not pre-registered). Ceiling < 1 comes from loud background windows (median 1-s RMS up to ~0.14 Pa). Template shape = F-35A (steep high-speed entry); a ditching arrival may be longer. Caveats: propagation slope misfit (airguns +10/+7 dB per octave) does not enter this figure; P_D is measured on real background but with a borrowed arrival shape.