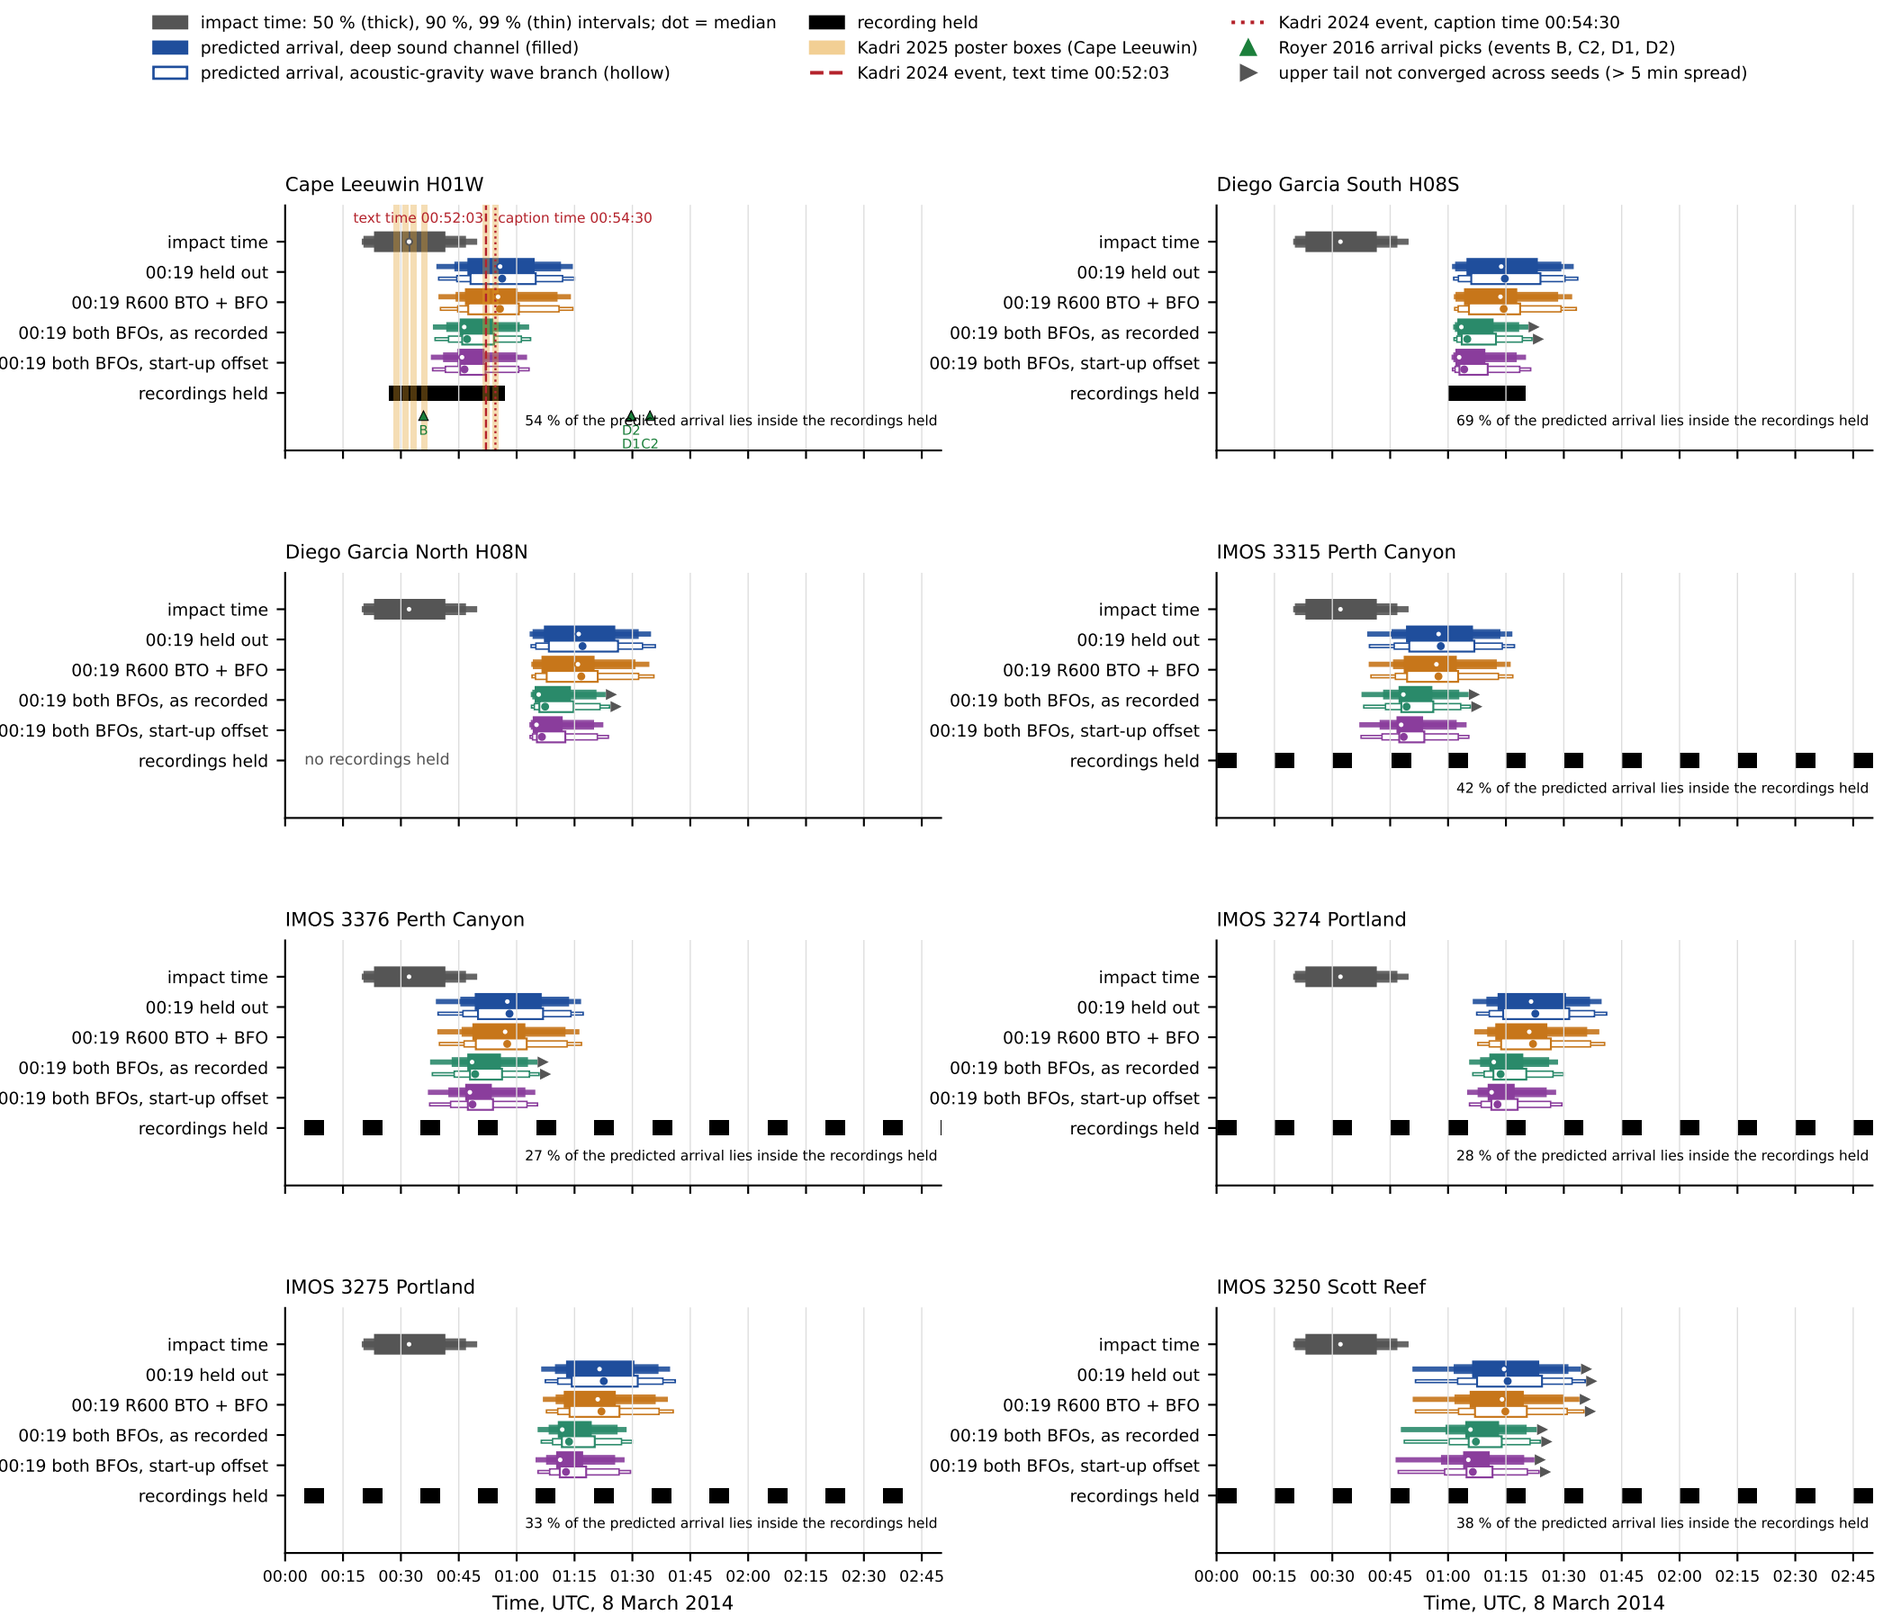


What the chart shows: for each receiver, when the sound of the impact would arrive, under four ways of using the 00:19 satellite data. The grey bar is the impact time itself. The black bars are the recordings that the project holds. The percentage says how much of the predicted arrival falls inside those recordings. Where a bar is hollow, the sound is the slower surface-wave type, whose speed is assumed and not yet calculated. No detection is claimed. The sound levels are not calibrated (caveats C1, C2).

Technical: source posterior = end of flight run J (74 seeds, 313.6 M rows) + northern supplement (reduced/impacts-ruleB.npz, technique >= 1 rows), p (dive) = 0.5, weights = EoF two-factor table total q = 1/3, C2 silent, survival factor, strata by p_core x Zhat, seeds pooled by evidence; supplement share by its lnw:comb mass. Arrival = impact time + WGS84 geodesic / c; SOFAR c ~ N(1.482, 0.006) km/s; AGW c ~ U(1.40, 1.50) km/s (assumed, not modelled); no refraction, blockage or path lengthening. Kish ESS at Cape Leeuwin: 00:19 Held Out 1,336,700, 00:19 R600 BTO + BFO 107,226, 00:19 both BFOs as recorded (Holland H2 data) 5,671, 00:19 both BFOs with start-up offset (Holland H1 data) 25,414. Held data: IMOS 307 s records every 15 min (data/imos/recordings.csv); Kadri 2024 Fig. 9 panels a-c (00:27-00:57) and d-e (01:00-01:20), digitised traces; H08N and OHASISBIO: nothing held. Poster boxes (SnT 2025 panels a, c) and Royer (LDO-201608) Table 5 picks are digitised/transcribed values. PREDICTIVE, NOT CALIBRATED; caveats C1 (propagation slope misfit +10.4/+7.4 dB per octave) and C2 (coupling efficiency not calibrated). Run J convergence accepted as a pass by project ruling, 16 Oct 2026. Script prepare/run_j_windows.py (prereg bc99b07); charts run_j_windows_charts.py.