
Where the simulated impacts would be loudest at the stations: predicted signal-to-noise ratio at the best open station, per 00:19 data option (p = 0.5)

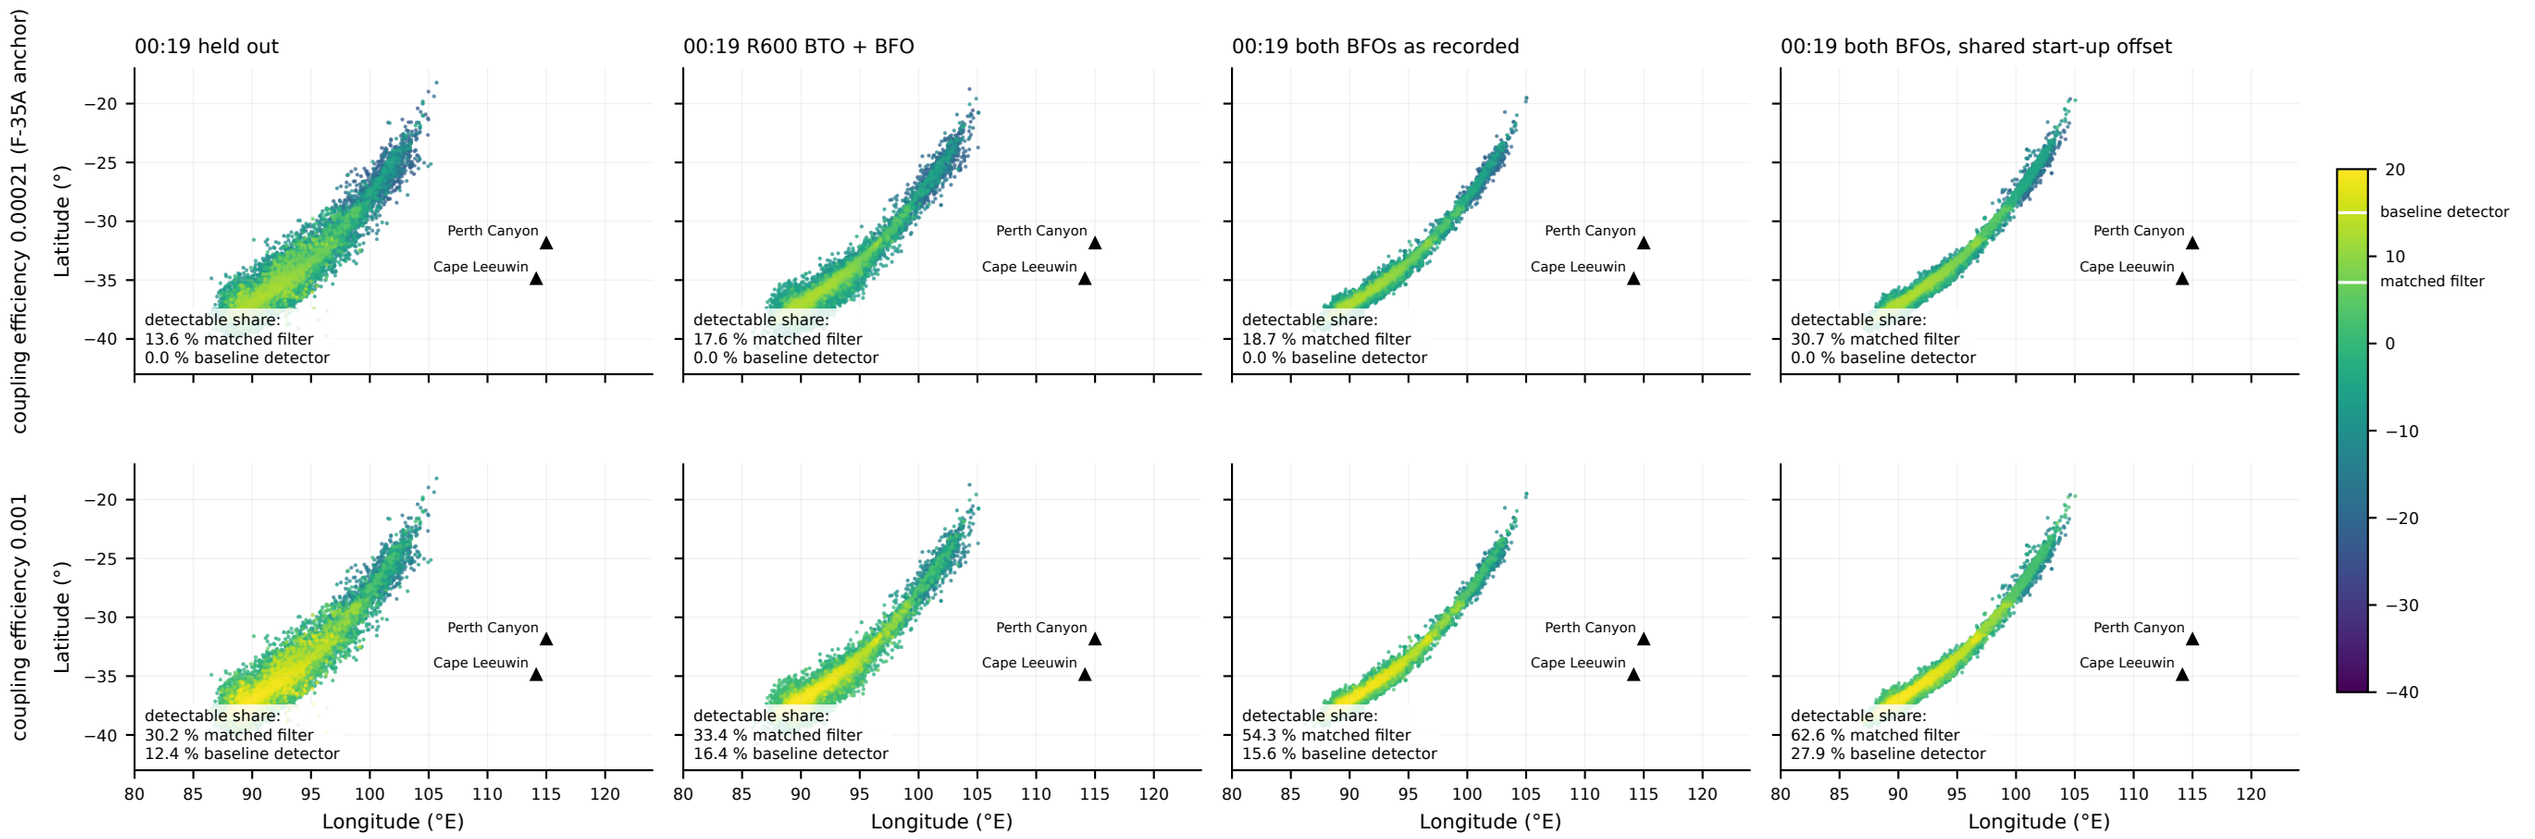

Plain-language note: Each dot is one simulated impact position from the end-of-flight run (a thinned random sample), coloured by how far its predicted sound level at the best unblocked station would sit above or below that station's background noise. Triangles mark the stations. The box gives the share of all simulated impacts (by weight) above each detector threshold. The upper row uses the coupling efficiency calibrated on the F-35A crash; the lower row a value five times larger.

Technical note: Source posterior: end of flight run J (74 seeds, 313.6 M rows) + northern supplement; weighted subsample 2 M draws per option x p; prereg run_j_levels.py 4277320. Colour = max over the eight receivers of SNR (5-40 Hz 1 s-equivalent total + 4.8 dB triad gain at IMS - station noise median); blocked paths excluded from the max; 40,000 of the 150,000 stored draws plotted per panel (sorted so the highest SNR draws are drawn last); shares are weighted over the full 2 M-draw subsample. Replaces the earlier 'peak radiated power at impact' six-panel figure (impacts now selected by predicted SNR, not source loudness; Refresh v2 section 1). PREDICTIVE, NOT CALIBRATED; caveats C1 (propagation slope misfit, now a source-term caveat after the EW0112 result) and C2 (coupling efficiency not calibrated; F-35A upper anchor 2.1e-4).