The Transair 810 non-detection keeps ditching coupling below 0.14-0.32 times the F-35A ridge at 2-10 m (and at 0.5-1 m on the extended ridge), but 30 to 30,000 times above the slow blunt analogs

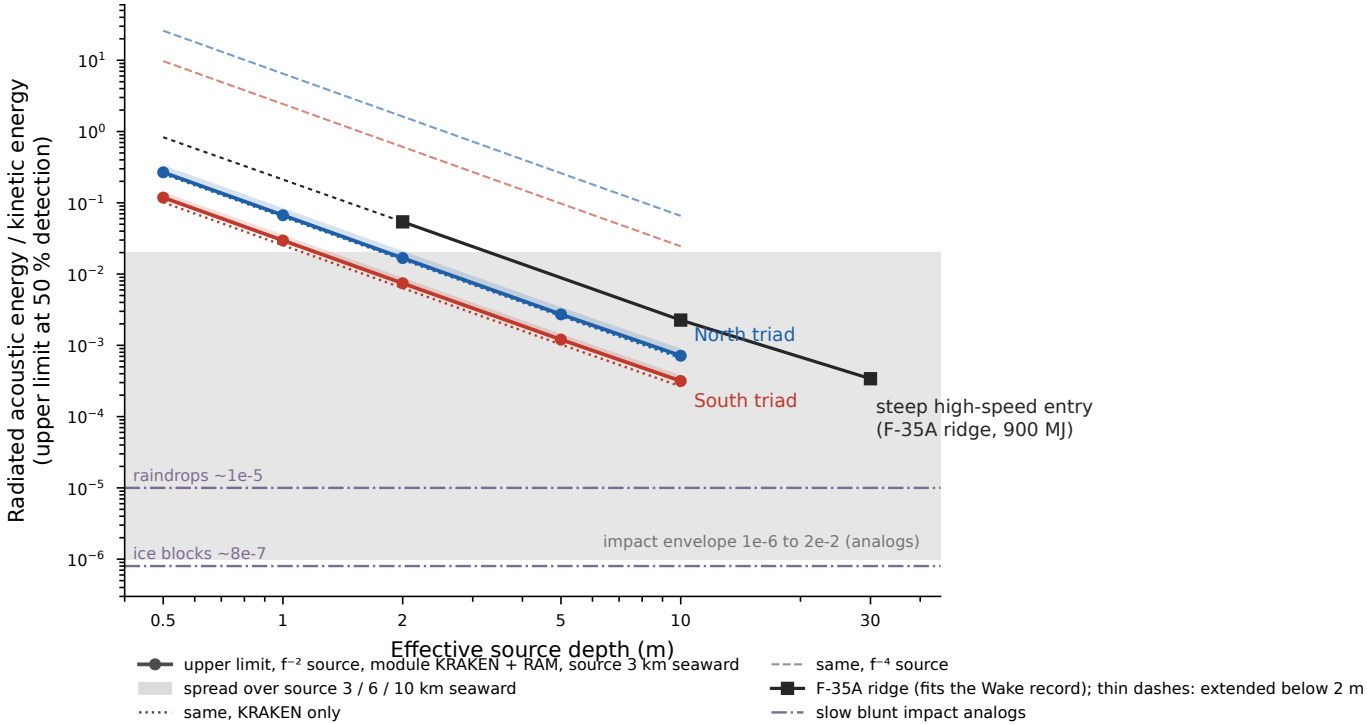

(i) Plain language. A line shows the most sound energy that the ditching could have made without our detector finding it half of the time. It is shown for each depth of the sound source. Shallow sources lose more sound at the sea surface, so the limit is higher there. The black line is the value that fits the F-35A crash. The ditching is below it, so the ditching made less sound for each unit of energy than the F-35A. The ditching limit is far above raindrops and ice blocks, so the data do not tell us whether a ditching is like those.
(ii) Technical. eta_rad,UL50 = SE_50 / [E rho c/(2 pi) sum_b W_b s_b(tau, slope) 10^(-TL_b/10)] (step2_invert.py relation; CV02 reproduced 2.259e-3). SE_50 = 4-40 Hz exposure at the measured 50 % detection level (M1b p < 0.05; L50 0.065 Pa H11N, 0.048 Pa H11S 1-s RMS); E = total KE 73.6 MJ (NTSB DCA21FA174; 90 % 69.4-77.9 MJ, changes the limit by ±6 %); tau 1 s. TL: module KRAKEN chain, GEBCO_2026, WOA23 B5C2 July, hard bottom; the great circle from the NTSB point has no KRAKEN modes at <= 40 Hz (Oahu shelf), so the source is moved 3/6/10 km seaward (declared alternative). RAM delta (pyram, 10 m): H11S +3.5/+3.7/+4.2 dB at 5/10/20 Hz, -1.5 dB at 40 Hz; H11N +2.4 dB at 10 Hz, -2.2 dB at 40 Hz (5, 20 Hz from H11S). F-35A ridge CV01-CV03 (E01, KRAKEN+RAM, f⁻²); below 2 m extended at the 2-10 m slope. Vertical KE (0.56 MJ) would raise every limit ×132 (table). Caveats: propagation slope misfit (+10/+7 dB per octave, airguns) not resolved here; P_D measured with the F-35A arrival shape.