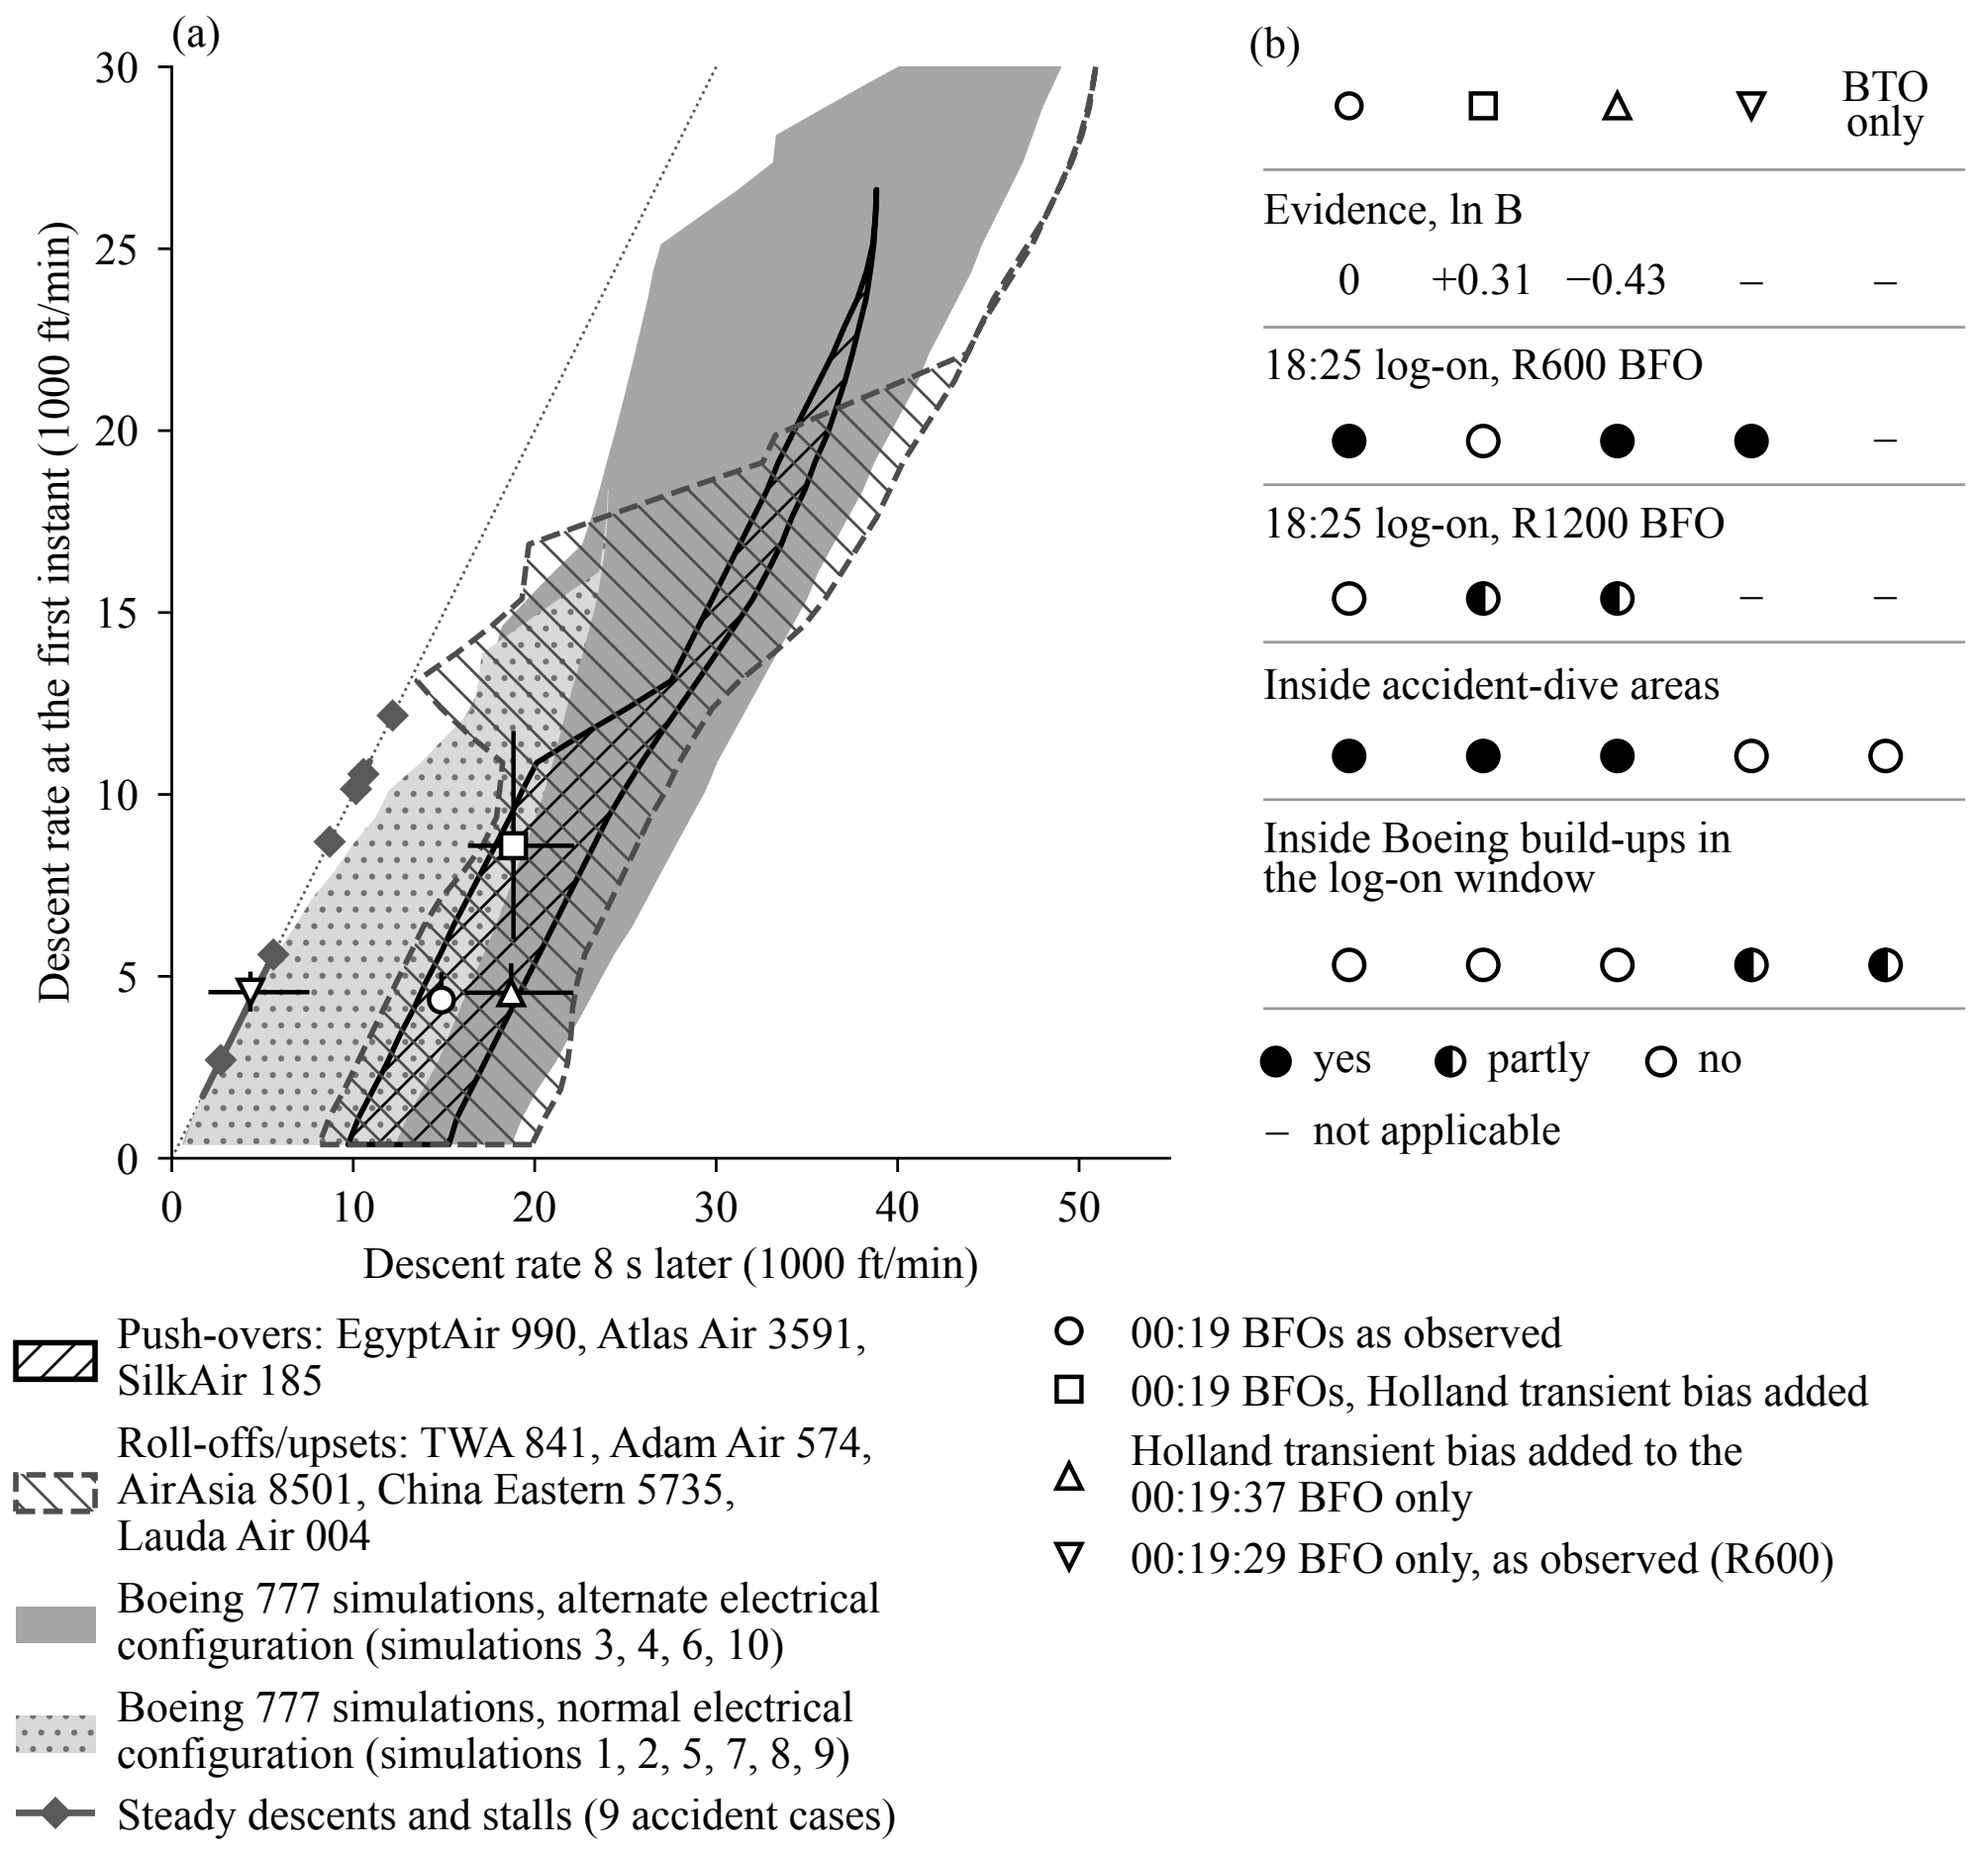

(a)
(b)
Descent rate at the first instant (1000 ft/min)
Descent rate 8 s later (1000 ft/min)
0
5
10
15
20
25
30
0
10
20
30
40
50
BTO only
Evidence, ln B
0
+0.31
−0.43
–
–
18:25 log-on, R600 BFO
18:25 log-on, R1200 BFO
Inside accident-dive areas
Inside Boeing build-ups in the log-on window
yes
partly
no
– not applicable
Push-overs: EgyptAir 990, Atlas Air 3591, SilkAir 185
Roll-offs/upsets: TWA 841, Adam Air 574, AirAsia 8501, China Eastern 5735, Lauda Air 004
Boeing 777 simulations, alternate electrical configuration (simulations 3, 4, 6, 10)
Boeing 777 simulations, normal electrical configuration (simulations 1, 2, 5, 7, 8, 9)
Steady descents and stalls (9 accident cases)
00:19 BFOs as observed
00:19 BFOs, Holland transient bias added
Holland transient bias added to the 00:19:37 BFO only
00:19:29 BFO only, as observed (R600)