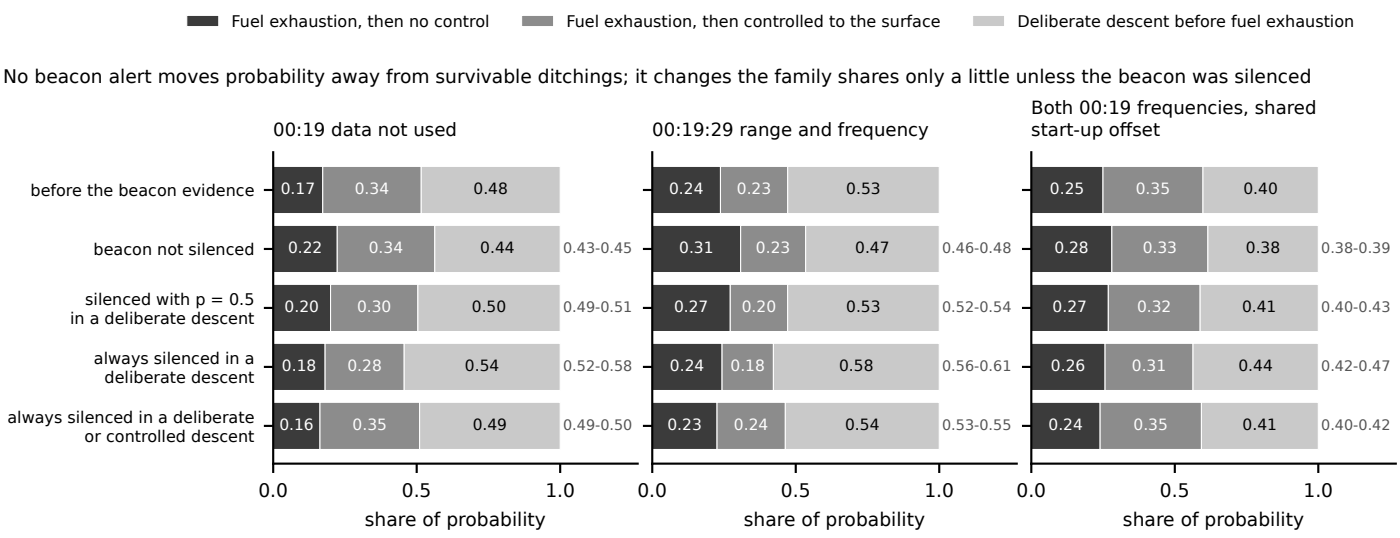

Note 1: The aircraft's fixed emergency beacon sends a satellite alert after a hard deceleration. No alert came. A beacon works more often in a survivable ditching than in a fast, steep impact, which usually destroys it. The bars show the share of each type of flight end before and after this evidence, with the middle values of the beacon rates. The grey numbers at the right show the range of the deliberate-descent share for the low and high rates. A person can silence the beacon only from the cabin ceiling; no official report discusses this. This is a sensitivity, not a result.
Note 2: P(no alert | row) = delta + (1 - delta)(1 - p_class); classes ditching-like (|FPA| <= 10 deg, v <= 100 m/s), high-energy (v > 212 m/s or |FPA| >= 30 deg), intermediate; p_class low/central/high = (0.40, 0.15, 0.00)/(0.50, 0.25, 0.05)/(0.60, 0.34, 0.15) (ATSB AR-2012-128; SIR pp. 53-56, 365-366, App. 1.6D; BEA post-AF447). Run J impact resample (10,000 rows per seed per treatment, all strata), q = 1/3, C2 silent; families A1 = code 1, A2 = 2, B = 3+6. Uncontrolled-arm dynamics NOT CALIBRATED (Boeing leave-one-out gate failed in all three rounds): impact class is a labelled sensitivity.