How loud an impact signal must be to be detected on each recorder, at a false-alarm rate of 1 in 100 per minute (source duration 3.3 s)

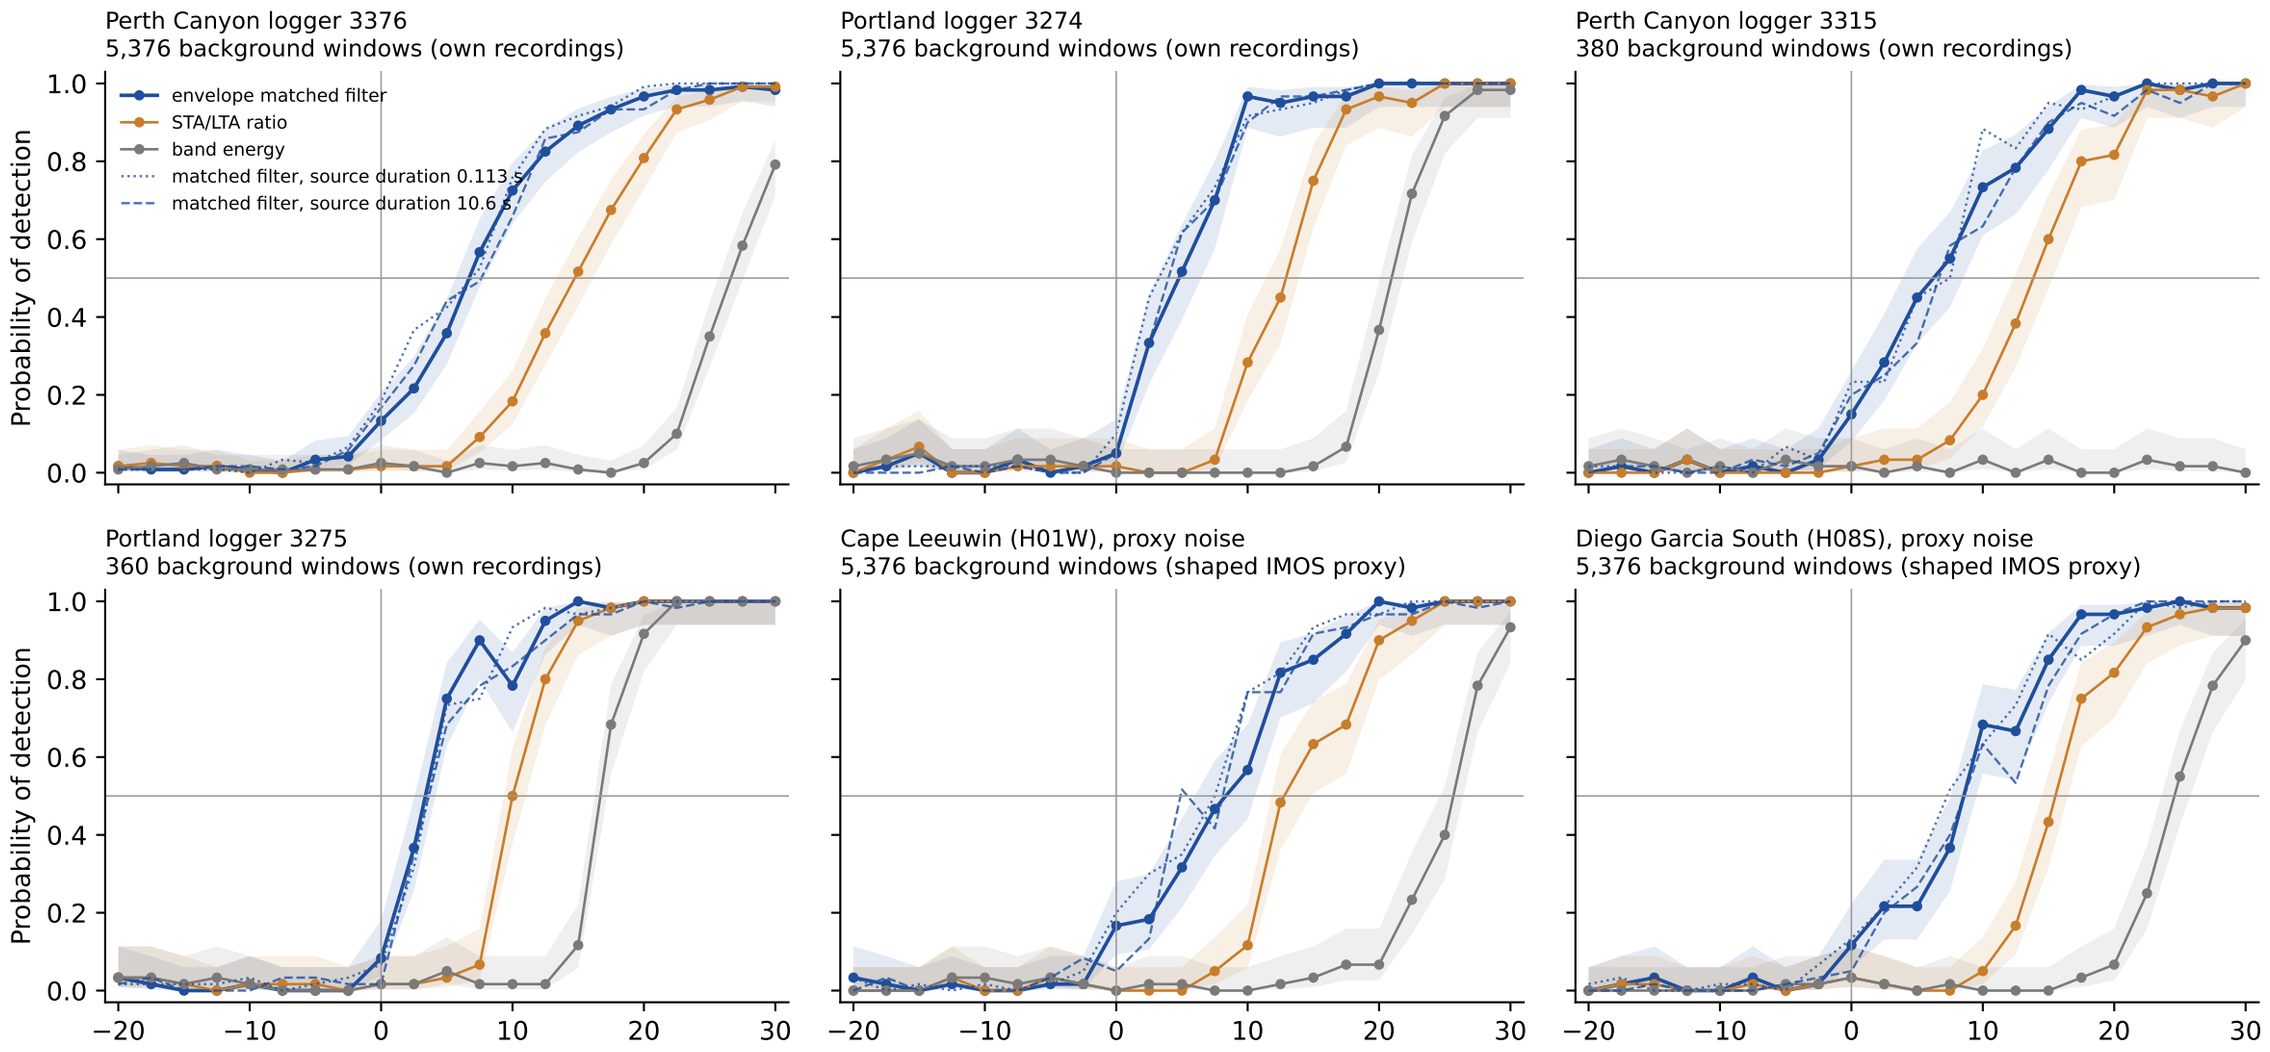

(i) Each curve shows the share of synthetic impact signals that a detector found when the signal was added to real recorded background noise at the level on the horizontal axis. 0 dB means the signal peak is as loud as the usual background. The band is the 95 % confidence interval. The Cape Leeuwin and Diego Garcia panels use a stand-in background made from Perth Canyon recordings, because the real recordings are not held. Estimates only.

(ii) Block 7 injection-recovery, prereg e816313 (prepare/injection_recovery_run_j). Source posterior = end of flight run J (74 seeds + supplement not used here); tau quantiles 5/50/95 % under 00:19 Held Out (D0'), p = 0.5: 0.11/3.30/10.59 s; dispersion = KRAKEN broadband on the representative deep-water profile at the run J 5/50/95 % ranges per receiver (bank of 9 templates). Level = peak 1 s 5-40 Hz band level minus the background median 1 s level. alpha = 0.01 per 60 s window; thresholds from the null of window maxima; N = 120 injections per cell at 3376, 60 elsewhere; Wilson 95 % CI. Backgrounds: 3376/3274 IMOS 14-day set; 3315/3275 own 8 March recordings outside the request window; H01W/H08S = IMOS 3376 shaped to Blackman (2004) App. B 2003 median PSD (DIGITISED), single hydrophone, no triad gain. Caveats C1 (propagation slope misfit +10.4/+7.4 dB per octave at H01W/H08S) and C2 (coupling efficiency not calibrated; eta swept over four decades, F-35A upper anchor). PREDICTIVE, NOT CALIBRATED.