



Kadri source-signal timing, candidate bearings and two-station timing controls

A. H01W source bearings against the seventh arc and integrated spatial PDF
The preferred 306.18° line meets the arc well north of the integrated high-density area

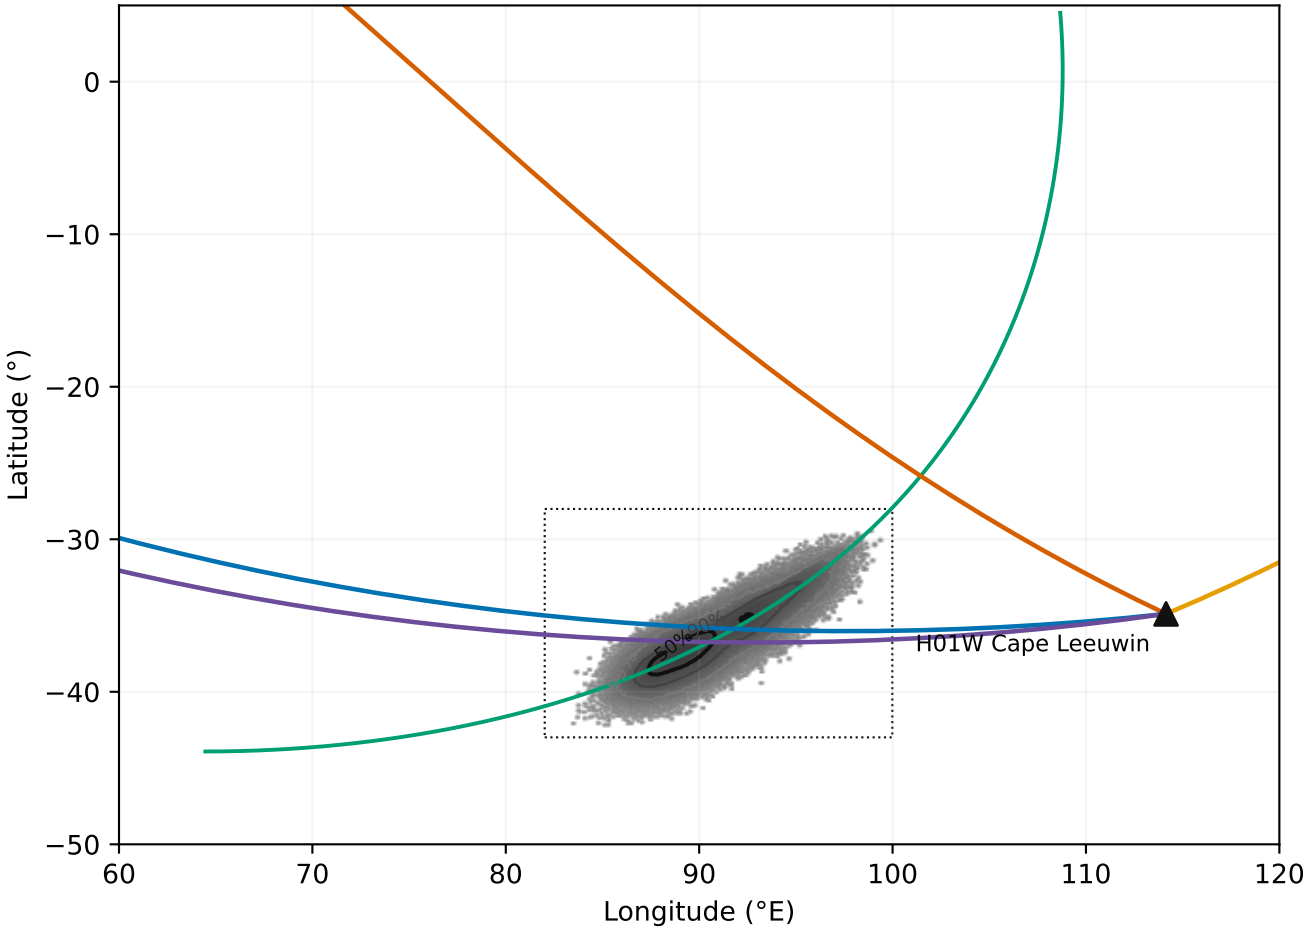

B. Independently screened H01W-H08S arrival-difference bands
Percentages are integrated-PDF compatibility masses, not event probabilities

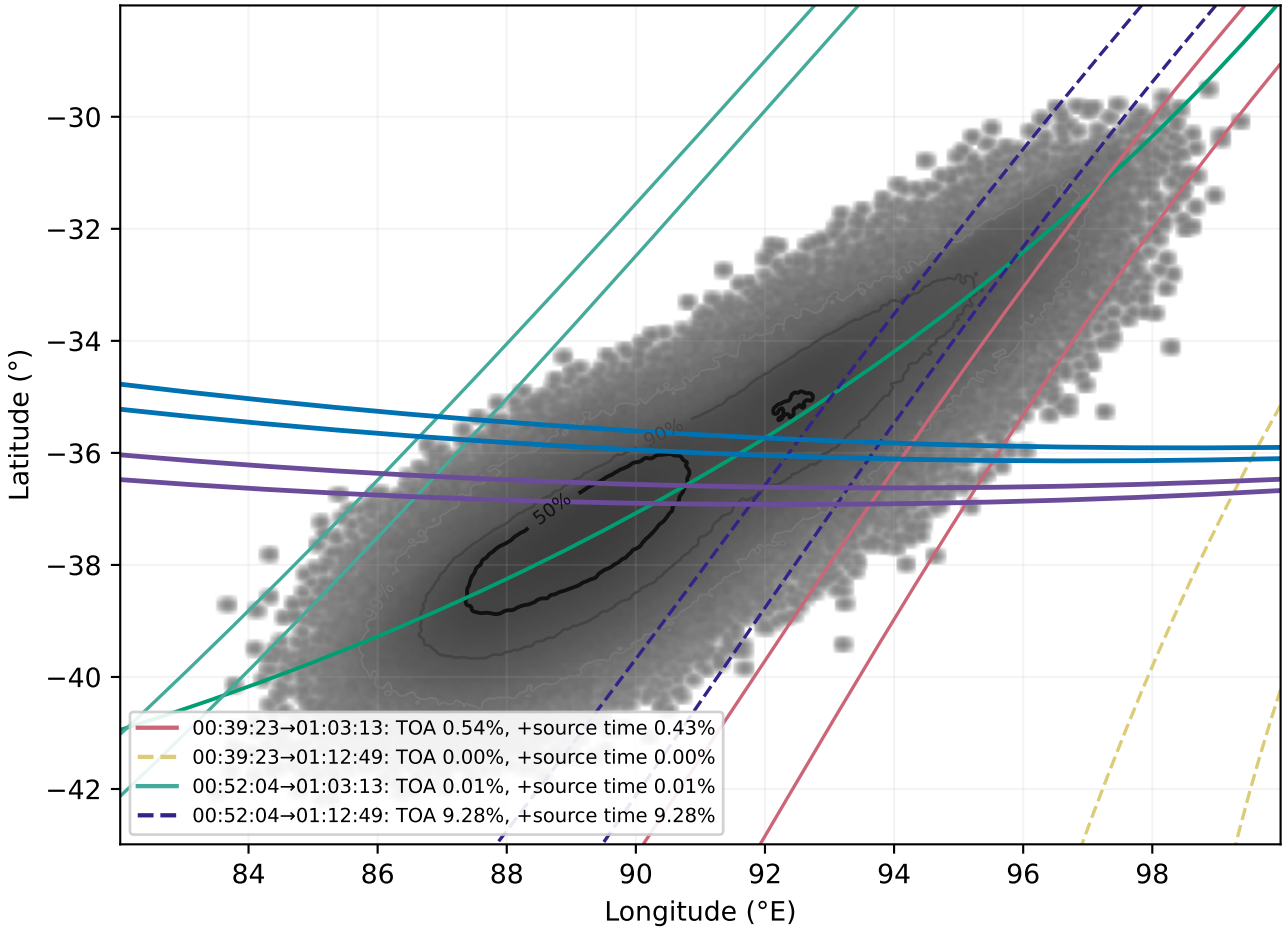

C. Figure 9c: light-grey pressure and high-contrast local-energy score at all noted source times

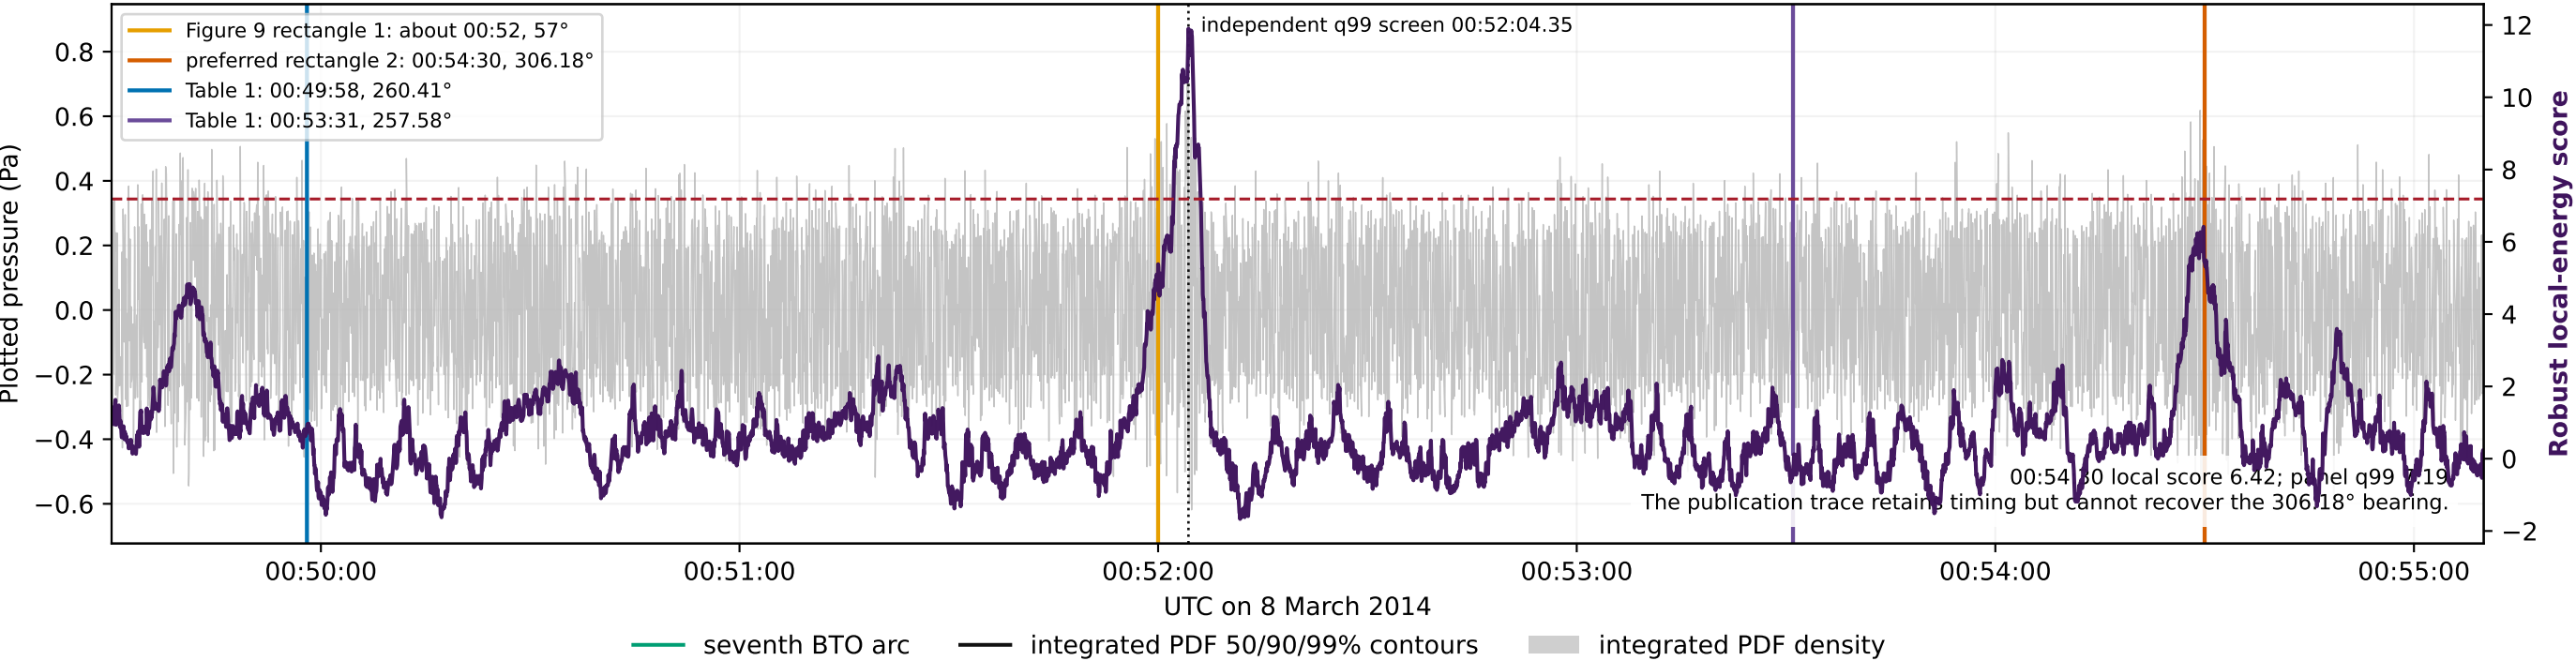


Figure 9 rectangle 1 (~00:52/57°) and preferred rectangle 2 (00:54:30/306.18°) are distinct; the p. 9 prose appears to conflate them. Arrival-difference bands cancel impact time; the second percentage also enforces impact during 00:19:37-00:49:37.