01 · FLASH MEMORY REPLACEMENT

Desolder the chip and place the new 25Q128.







02 · USB CONNECTION & VERIFICATION

Connect via USB and format, then verify the result.



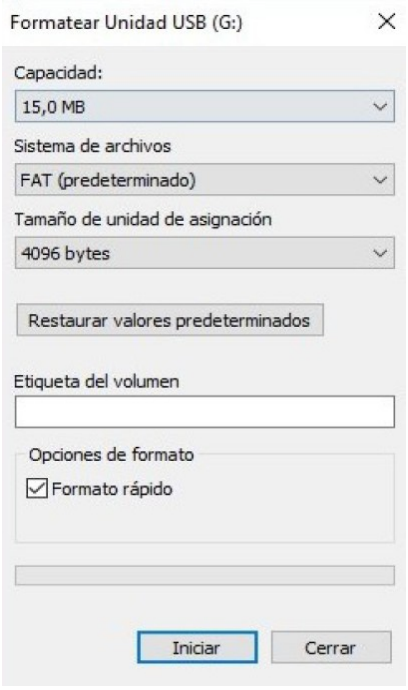

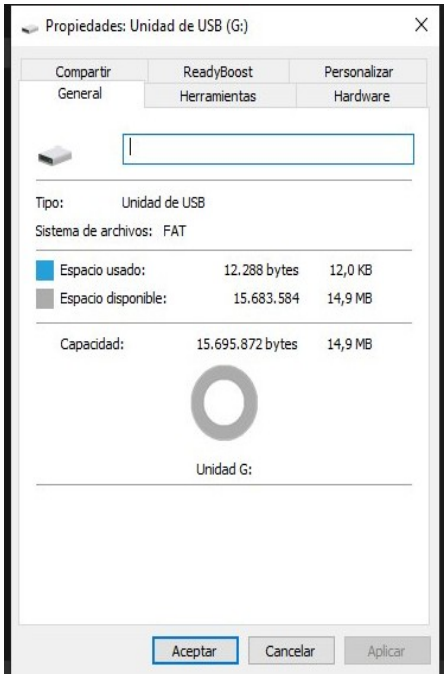



IMPORTANT · WITHOUT WARRANTY · AT YOUR OWN RISK

Technical supplement for DEEPSDR RELOAD / FLASH MOD.