



Light is pure
PURITEC® HNS® UV-C lamps

Efficient purification of air, water and surfaces

Light is OSRAM

OSRAM

UVC alternatives to chemical purification

OSRAM PURITEC® HNS® germicidal lamps for a wide range of applications


OSRAM PURITEC® HNS® are low-pressure lamps that emit mercury line radiation mainly in the short-wave ultraviolet range. They are the highly promising eco-friendly alternatives to chemical purification processes. OSRAM offers many different lamps for effective purification in a wide range of applications. OSRAM PURITEC® HNS® are available in different sizes and outputs to suit different requirements.

Working principle of UV-C lamps

UV-C radiation has a photolytic effect on DNA, micro-organisms such as bacteria, moulds, yeasts and virus cannot replicate. The purification effect is obtained with wavelengths below 320 nm, with maximum effectiveness at 260 nm. OSRAM HNS germicidal lamps emit light at 254 nm, about 85% of maximum effectiveness, and are ozone-free.

Functions

- General elimination of bacteria
- Deactivation of escherichia coli

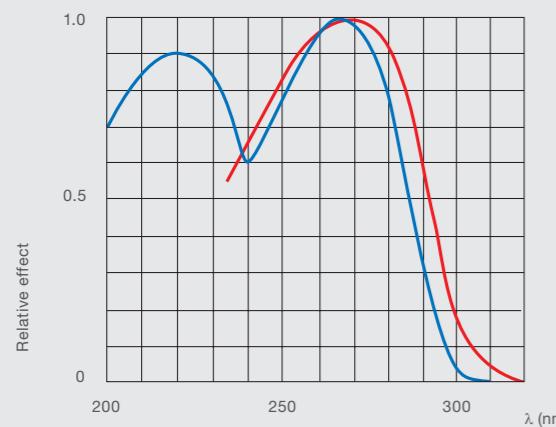


OSRAM PURITEC® HNS® UV-C lamps for purification

The UV-C radiation generated by high-energy UV-C lamps moves at a wavelength range between 200 nanometers (nm) and 280 nanometers. This gives the radiation a cell-destroying effect that is ideal for highly effective purification of water, air and surfaces and eliminates the need for chemical products.

Ozone-free lamps

The main lines in the spectrum are at 254 nm and 185 nm. Ultraviolet light, which has a wavelength of less than 240 nm, produces ozone. High-energy radiation below 240 nm can pass through quartz. If ozone is not required then special glass or appropriate types of quartz are used. OSRAM PURITEC® HNS® are ozone-free lamps. They are transparent for the radiation that kills micro-organisms but do not let ozone-generating radiation through.

Spectral power distribution of ozone-free lamps

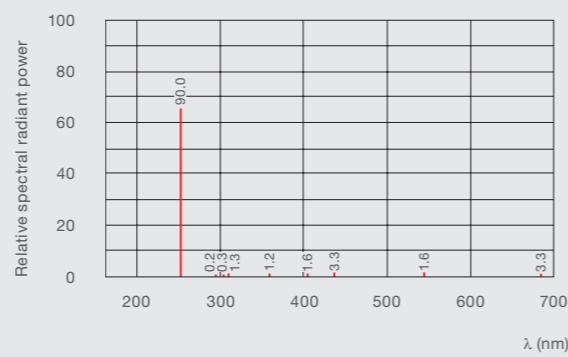

PURITEC® HNS® lamp types



Compact S and L



Linear T5 and T8



4 Pin SE


Product benefits

- Effective, environmentally friendly purification without chemicals
- Long lifetime due to specific coating
- Wide range of form factors
- Perfect ballast and lamp fit
- Very low mercury content
- 100% RoHS-conform
- Lead-free
- Ozone-free
- „Made in Europe“

Product features

- Single UV-C peak at wavelength of 254nm
- High efficiency (30% UV-C output)
- Non-ozone generating
- Soft glass tube
- With UV-C transparent long-life coating
- Without fluorescent coating
- Low pressure Hg discharge lamps

Decrease in UVC radiation for the HNS 55 W G13 HO

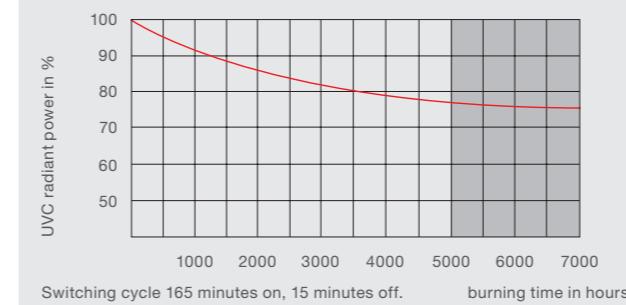

Areas of application



Water purification

Water must often be rid of pathogenic microorganisms to become safe for drinking. Ultraviolet radiation is employed to change the DNA structure of the microorganisms, either killing the bacteria immediately or rendering them unable to breed. Because UV purification is a physical disinfection method, without any harmful chemicals, it doesn't cause secondary pollution.

This means there is no malodorous smell in the water or by-products.

For water purification and cleansing in:

- Private households
- Water dispensers
- Community water works
- Mobile stations (camping, outdoor activities)
- Swimming pools
- Ultra-pure water systems
- Ponds and aquariums
- Fish farms
- Food processing factories
- Sewage systems

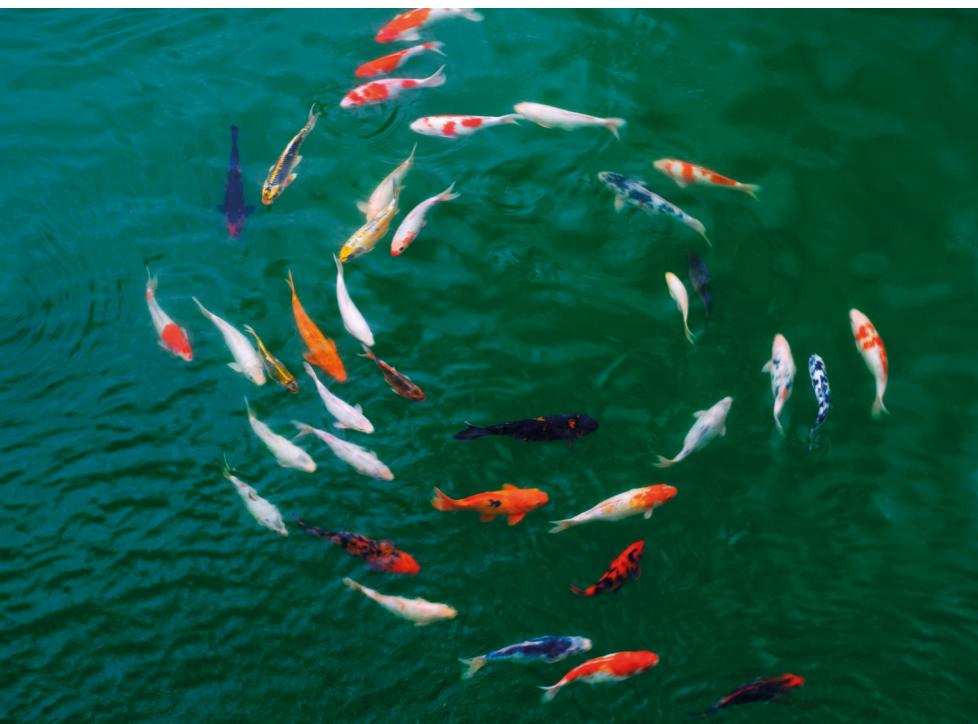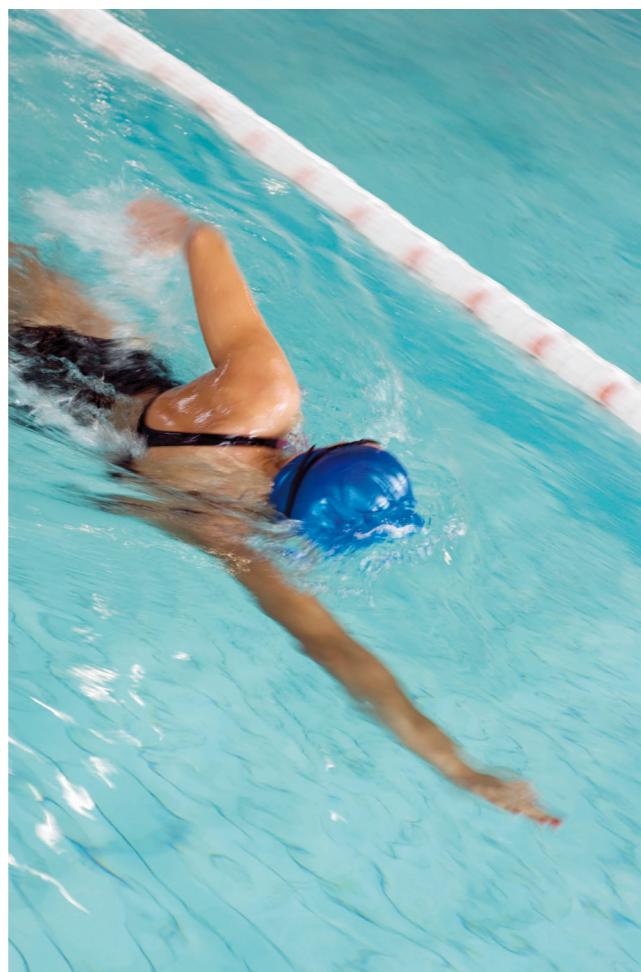

Air purification

Ultraviolet (UV) purification is a very effective method to clean the air of biological pollutants such as bacteria, viruses and fungal spores. UV germicidal lamps can be installed in ventilation ducts to clean the air passing through them. UV air purification is more economical and efficient than other air filtration and cleaning methods.

For air purification in:

- Hospitals
- Doctors' practices
- Clean rooms
- Offices with or without air-conditioning systems
- Cars
- Storage rooms
- Food processing
- Rooms with frequent public access
- Animal stalls




Surface cleaning

For packaging pharmaceuticals and food, in aseptic zones in hospitals and for surface cleaning of equipment and instruments objects are exposed directly to UV radiation.

For surface purification in:

- Hospitals and other aseptic zones
- Health care
- Food and pharmaceutical industry

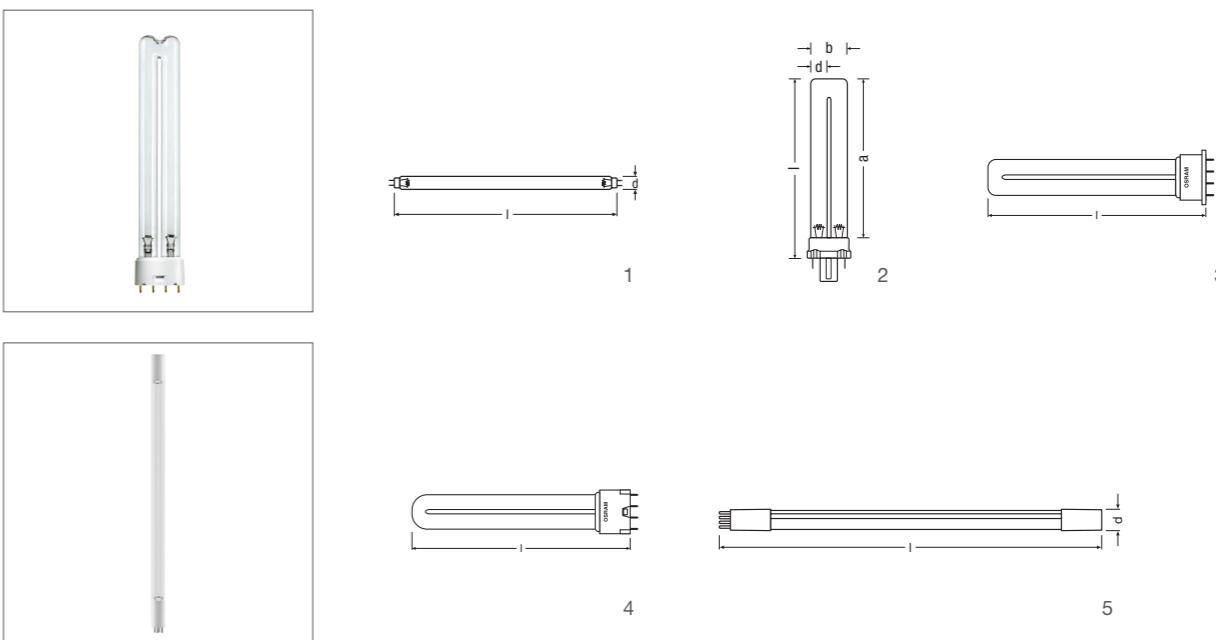**PURITEC® HNS® UV-C**


| Product name | GTIN (EAN) | W | A | \varnothing d [mm] | I [mm] | G | UVC/W | Box | UV-C |
|------------------------------|---------------|----|------|-------------------------|-----------|-------|-------|-----|------|
| HNS 4 W G5 | 4008321378316 | 4 | 0.17 | 16 | 136 | G5 | 0.9 | 25 | 1 |
| HNS 6 W G5 | 4008321378330 | 6 | 0.16 | 16 | 212 | G5 | 1.7 | 25 | 1 |
| HNS 8 W G5 | 4008321378385 | 8 | 0.15 | 16 | 288 | G5 | 2 | 25 | 1 |
| HNS 11W G5 | 4008321468796 | 11 | 0.41 | 16 | 212 | G5 | 2.5 | 25 | 1 |
| HNS 16 W G5 | 4008321620774 | 16 | 0.43 | 16 | 288 | G5 | 4 | 25 | 1 |
| HNS S 5 W G23 ¹⁾ | 4008321229946 | 5 | 0.18 | 28 | 108 | G23 | 1.3 | 10 | 2 |
| HNS S 7 W G23 ¹⁾ | 4050300941202 | 7 | 0.18 | 28 | 135.5 | G23 | 1.8 | 10 | 2 |
| HNS S 9 W G23 ¹⁾ | 4050300941226 | 9 | 0.18 | 28 | 165.5 | G23 | 2.5 | 10 | 2 |
| HNS S 11 W G23 ¹⁾ | 4050300941240 | 11 | 0.16 | 28 | 235.5 | G23 | 3 | 10 | 2 |
| HNS S/E 7 W 2G7 | 4008321383891 | 7 | 0.18 | 28 | 112 | 2G7 | 1.9 | 10 | 3 |
| HNS S/E 9 W 2G7 | 4008321384911 | 9 | 0.17 | 28 | 142 | 2G7 | 2.5 | 10 | 3 |
| HNS S/E 11 W 2G7 | 4008321384935 | 11 | 0.15 | 28 | 212 | 2G7 | 3.6 | 10 | 3 |
| HNS S 13 W GX23 | 4052899040410 | 13 | 0.28 | 28 | 179 | GX23 | 3.4 | 10 | |
| HNS L 18 W 2G11 | 4008321220431 | 18 | 0.38 | 40 | 214 | 2G11 | 5.5 | 10 | 4 |
| HNS L 24 W 2G11 | 4008321220561 | 24 | 0.35 | 40 | 314.5 | 2G11 | 7.3 | 10 | 4 |
| HNS L 36 W 2G11 | 4008321220684 | 36 | 0.44 | 40 | 408 | 2G11 | 10.8 | 10 | 4 |
| HNS L 55 W 2G11 | 4052899012394 | 55 | 0.55 | 40 | 533 | 2G11 | 17 | 10 | 4 |
| HNS L 60 W 2G11 | 4052899012462 | 60 | 0.8 | 40 | 408 | 2G11 | 19 | 10 | 4 |
| HNS L 95 W 2G11 | 4052899012509 | 95 | 0.8 | 40 | 533 | 2G11 | 27 | 10 | 4 |
| HNS 15W G13 | 4008321770271 | 15 | 0.33 | 26 | 438 | G13 | 4 | 25 | 1 |
| HNS 30W G13 | 4008321770301 | 30 | 0.36 | 26 | 895 | G13 | 12 | 25 | 1 |
| HNS 36W G13 | 4052899084018 | 36 | 0.44 | 26 | 1200 | G13 | 15 | 25 | 1 |
| HNS 55W G13 | 4052899083936 | 55 | 0.77 | 26 | 895 | G13 | 18 | 25 | 1 |
| HNS 16W 4P SE | 4052899437586 | 16 | 0.44 | 16 | 320.3 | 4P SE | 4 | 40 | 5 |
| HNS 20W 4P SE | 4052899437562 | 20 | 0.45 | 16 | 430 | 4P SE | 6 | 40 | 5 |
| HNS 36W 4P SE | 4052899437630 | 36 | 0.43 | 16 | 845.4 | 4P SE | 14 | 40 | 5 |

1) UV irradiance 253.7 nm measured at a distance of 1 m at mid-lamp level, at 20 °C ambient temperature, free-burning. Between 0.3...3.0 m, the irradiance is inversely proportional to the square of the distance

Warning: PURITEC® HNS® (UVC) lamp classification according IEC/EN 62471 (photo biological risk): Risk Group 3. The radiation from PURITEC® HNS® lamps poses a health risk. It can cause conjunctivitis and erythema (sunburn) after only brief exposure. The skin and eyes must be protected against direct exposure. Suitable protective clothing must therefore be worn in rooms that do not offer direct protection. If germicidal lamps are used to purify rooms in which food is kept the relevant food regulations governing the use of germicidal lamps must be followed. UVC lamps are not be used for General Lighting application.

OSRAM ballasts for PURITEC® HNS® lamps

OSRAM as a system provider with know-how in lamp and ECG development offers VDE-accredited single and twin lamp ballasts for a wide range of different lamps.



Product benefits

- High performance
- Long lifetime
- Easy, quick and economic upgrade to energy-efficient ECG operation

OSRAM PURITEC® HNS® UV-lamps ECG Overview

| Product name | Product number | Single lamp ballast | Product number | Twin lamp ballast | Product number |
|-------------------------|----------------|--|--------------------------------|--|----------------|
| PURITEC HNS 4W G5 | 4008321378316 | QT-ECO 1x4-16/220-240 S QT-ECO 1x4-16/220-240 L | 4050300638584 4050300660370 | | |
| PURITEC HNS 6W G5 | 4008321378330 | QT-ECO 1x4-16/220-240 S QT-ECO 1x4-16/220-240 L | 4050300638584 4050300660370 | QT-ECO 2x5-11/220-240 S | 4050300821504 |
| PURITEC HNS 8W G5 | 4008321378385 | QT-ECO 1x4-16/220-240 S QT-ECO 1x4-16/220-240 L | 4050300638584 4050300660370 | QT-ECO 2x5-11/220-240 S | 4050300821504 |
| PURITEC HNS 11W G5 | 4008321468796 | QTP - Optimal 1x18 - 40 | 4008321873743 | | |
| PURITEC HNS 16W G5 | 4008321620774 | QTP - Optimal 1x18 - 40 | 4008321873743 | | |
| PURITEC HNS 16W 4P SE | 4052899437586 | QTP - Optimal 1x18 - 40 | 4008321873743 | | |
| PURITEC HNS 20W 4P SE | 4052899437562 | under investigation | | | |
| PURITEC HNS 36W 4P SE | 4052899437630 | under investigation | | | |
| PURITEC HNS 15W G13 | 4008321398826 | QT-ECO 1x 18-24/220-240 S QT-ECO 1x 18-24/220-240 L | 4050300638560 | QTP-DL 2x 18-24/220-240 S QTP-DL 2x 18-24/220-240 L | 4008321117885 |
| PURITEC HNS 25W G13 | 4052899083851 | QTP 5 1x80 | 4008321329059 | | |
| PURITEC HNS 30W G13 | 4008321398888 | QTP-OPTIMAL 1x18-40 | 4008321873743 | | |
| PURITEC HNS 36W G13 | 4052899084018 | QTP-OPTIMAL 1x18-40 | 4008321873743 | | |
| PURITEC HNS 55W G13 | 4052899083936 | QTP-OPTIMAL 1x54-58 QTP 5 1x80 | 4008321873729 4008321873729 | QTP-OPTIMAL 2x54-58 | 4008321880253 |
| PURITEC HNS S 5W G23 | 4008321229946 | Starter included; only for CCG | | | |
| PURITEC HNS S 7W G23 | 4050300941202 | Starter included; only for CCG | | | |
| PURITEC HNS S 9W G23 | 4050300941226 | Starter included; only for CCG | | | |
| PURITEC HNS S 11W G23 | 4050300941240 | Starter included; only for CCG | | | |
| PURITEC HNS S 13W GX23 | 4008321620774 | Starter included; only for CCG | | | |
| PURITEC HNS S/E 7W 2G7 | 4008321383891 | QT-ECO 1x4-16/220-240 S | 4050300638584 | QT-ECO 2x5-11/220-240 S | 4050300821504 |
| PURITEC HNS S/E 9W 2G7 | 4008321384911 | QT-ECO 1x4-16/220-240 S | 4050300638584 | QT-ECO 2x5-11/220-240 S | 4050300821504 |
| PURITEC HNS S/E 11W 2G7 | 4008321384935 | QT-ECO 1x4-16/220-240 S | 4050300638584 | QT-ECO 2x5-11/220-240 S | 4050300821504 |
| PURITEC HNS L 18W 2G11 | 4008321220431 | QT-ECO 1x 18-24/220-240 S QT-ECO 1x 18-24/220-240 L QTP-DL 1x18-40 | 4050300638560 4008321873743 | QTP-DL 2x18-24/220-240 | 4008321117885 |
| PURITEC HNS L 24W 2G11 | 4008321220561 | QT-ECO 1x 18-24/220-240 S QT-ECO 1x 18-24/220-240 L QTP-DL 1x18-40 | 4050300638560 4008321873743 | QTP-DL 2x18-24/220-240 | 4008321117885 |
| PURITEC HNS L 36W 2G11 | 4008321220684 | QTP-DL 1x36-40/220-240 | 4008321117908 | QTP-DL 2x36-40/220-240 | 4008321117922 |
| PURITEC HNS L 55W 2G11 | 4052899012394 | QTP-DL 1x55 GII | 4008321390158 | QTP-DL 2x55 GII | 4008321390172 |
| PURITEC HNS L 60W 2G11 | 4052899012462 | QTP 5 1x80 | 4008321329059 | | |
| PURITEC HNS L 95W 2G11 | 4052899012509 | QTP 5 1x80 | 4008321329059 | | |

07/18 OSRAM does not accept liability for errors, changes and omissions.



OSRAM GmbH

Head office:
Marcel-Breuer-Str. 6
80807 Munich, Germany
Phone +49 89-6213-0
Fax +49 89-6213-2020
www.osram.com

Professional and Industrial Applications:
Nonnendammallee 44
13629 Berlin
E-mail: webmaster@osram.com



OSRAM