玖拾加

90,90後的家






griffiths 格立菲斯

廣東省佛山市禪城區塱寶西路


C Area, Level 3, Building 2, European Industrial Park No. 60, West Langbao Road, Foshan City, Guanadana Bravinca, P.R. China

T: +86-757-82521576 E: griffiths@itgriffiths.com

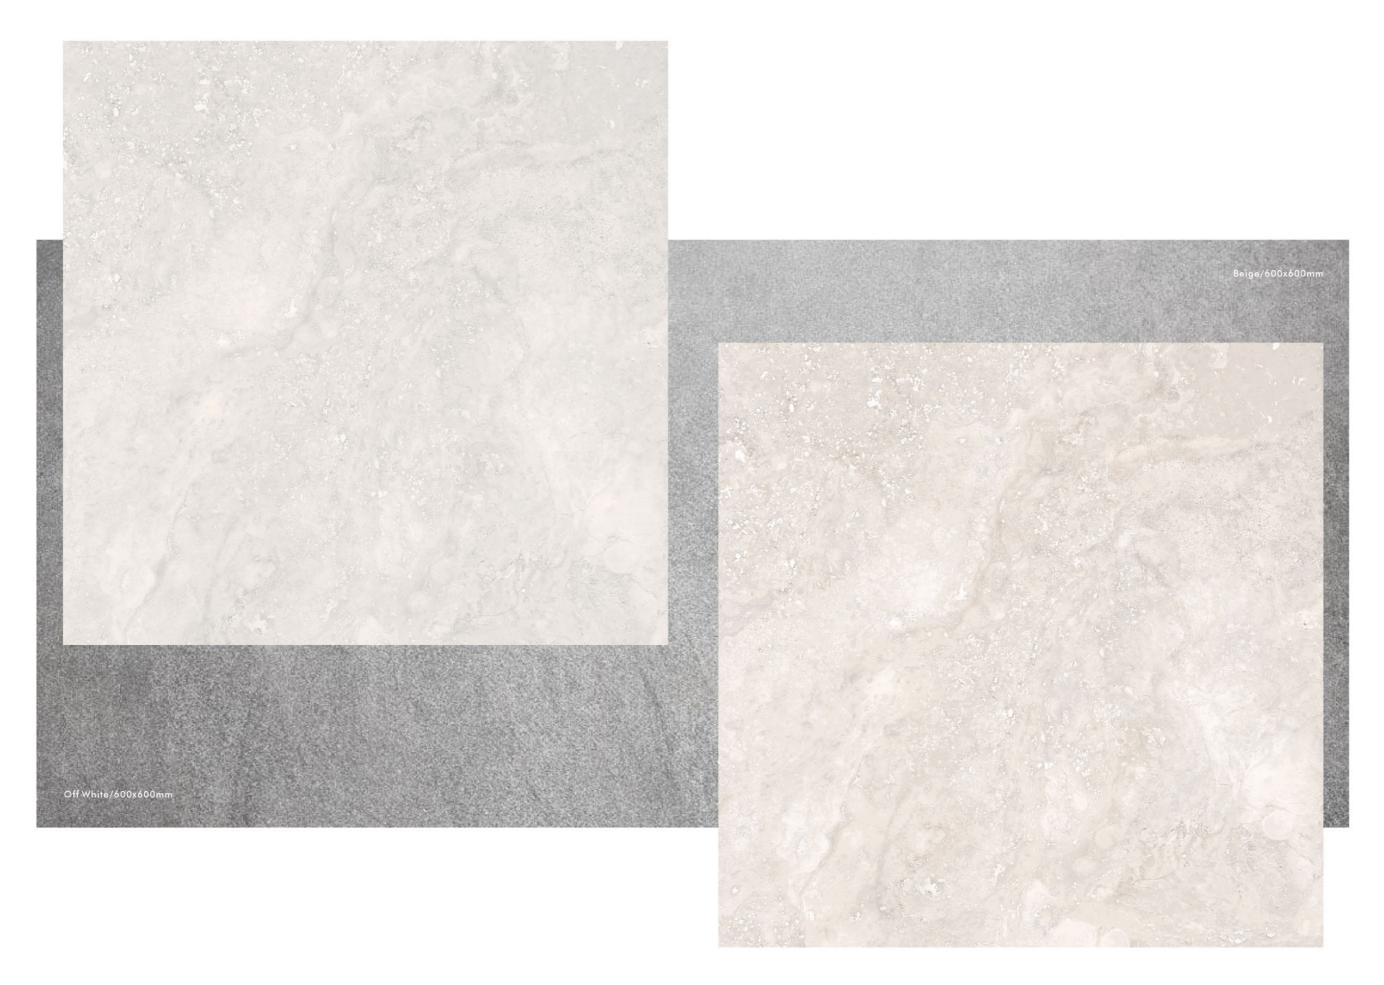






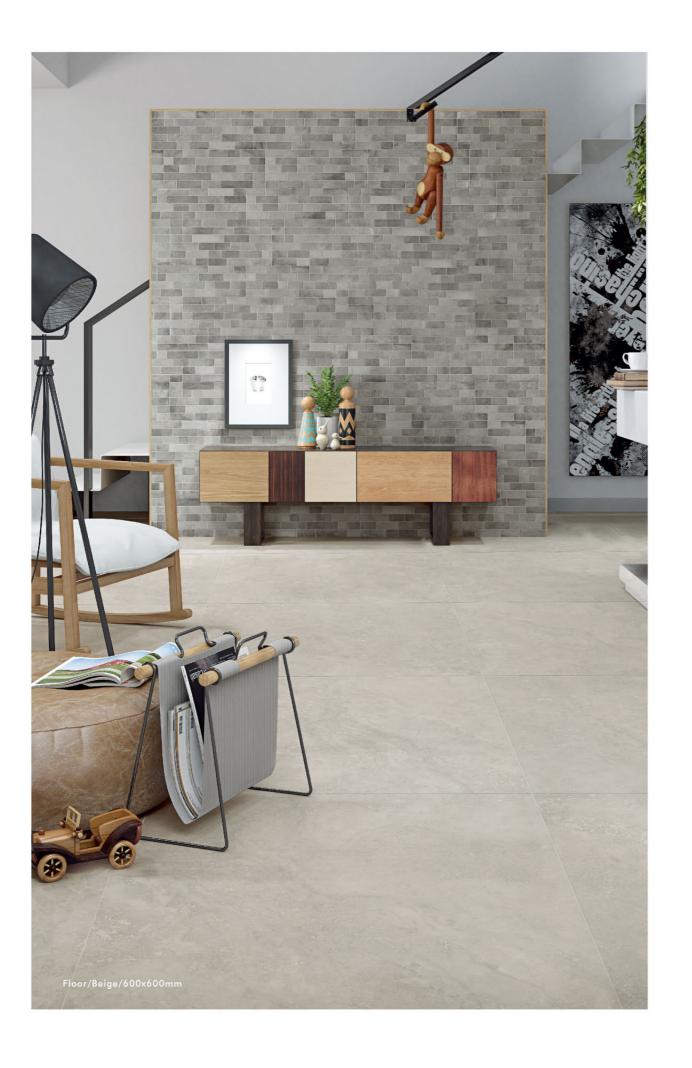




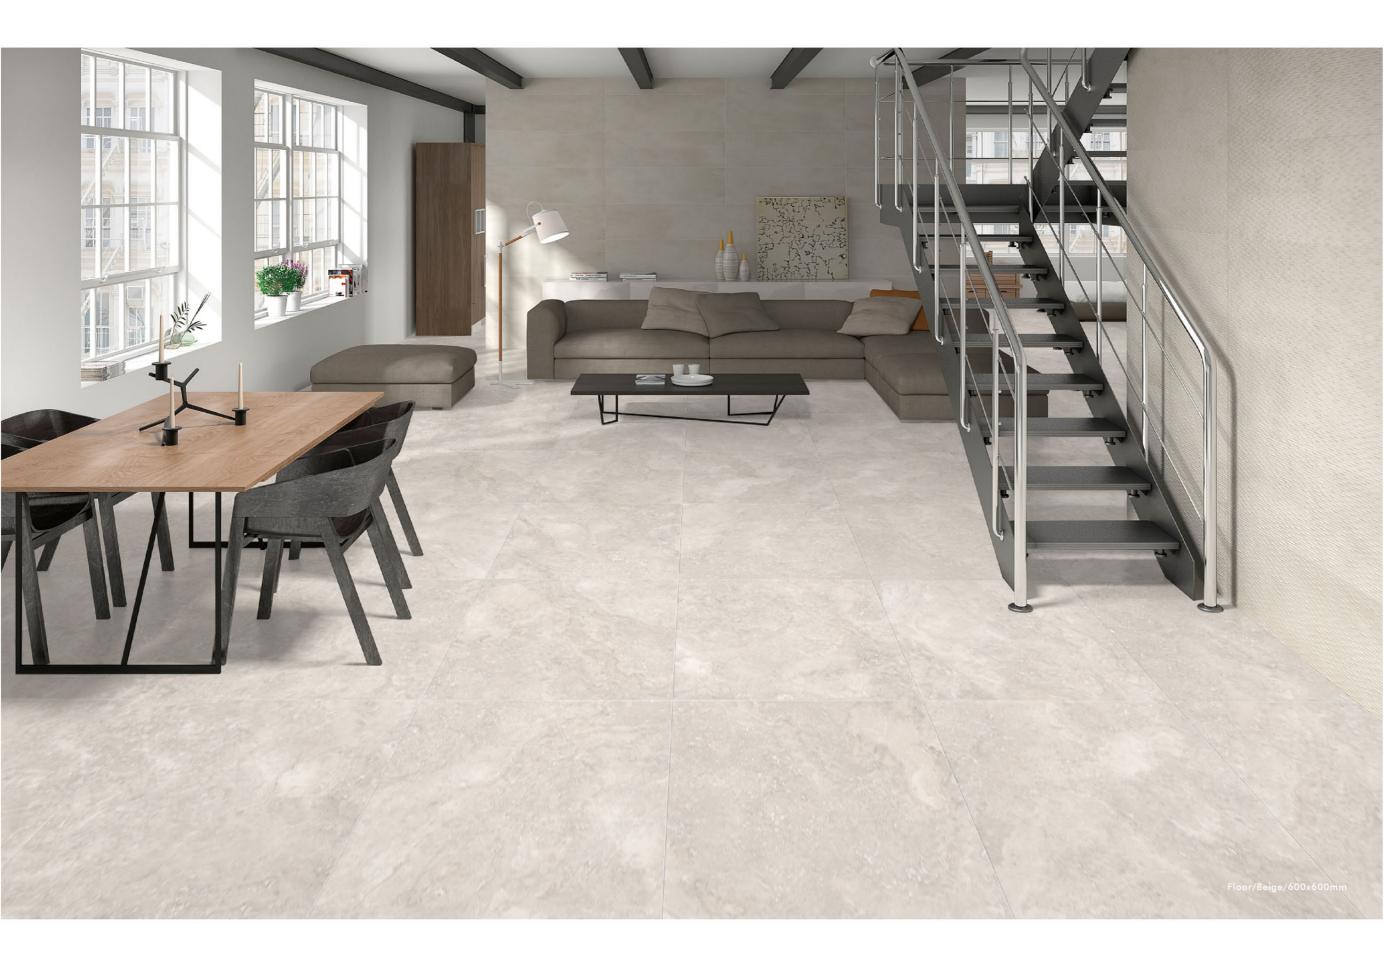



SURFACE APPLICATION INSTALLATION GUIDANCE FLOOR TILES MIN. LAYING GAP 3mm M MATT WALL TILES 02 COLOURS 01) SIZES 01) SURFACES

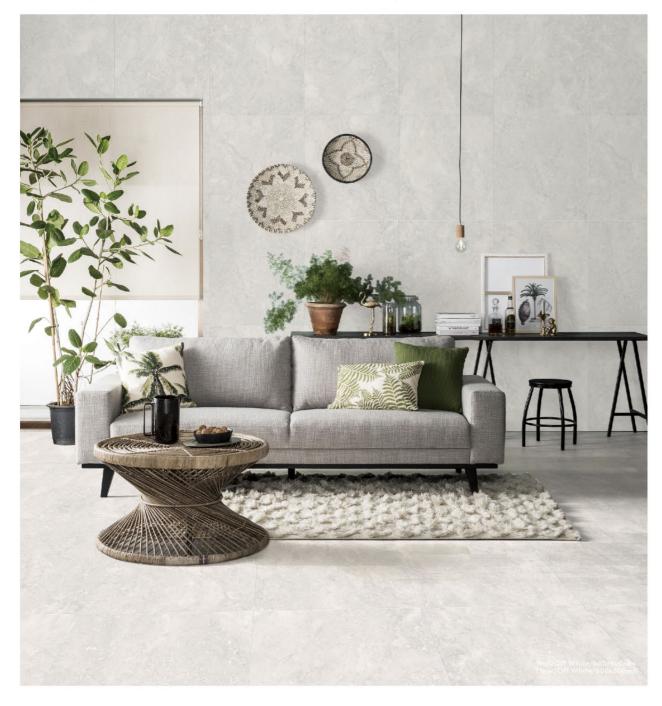


COLOURS











AVAILABLE SIZES

600x600mm

PRODUCT FEATURE / SURFACE / APPLICATION / INSTALLATION GUIDANCE























V1=Uniform Appearance

V3=Moderate Variation

V2=Slight Variation V4=Substantial Variation

TECHNICAL SPECIFICATION

MEASUREMENT AND SURFACE APPEARANCE	STANDARD PRESCRIBED VALUES	DW TILES NAPOLI STANDARD VALUE (600 × 600mm)	DW TILES NAPOLI STANDARD VALUE (600 × 600mm)
Dimensions & Surface Quality Length and Width	±1.0% max.	-0.03-0.03%	-0.03-0.03%
Thickness	±10% max.	9.0-9.5mm	11.0-11.5mm
90° Orthogonality	±1.0% max.	-0.06-0.07%	-0.06-0.07%
Straightness of sides	±0.5% max.	-0.06-0.07%	-0.02-0.03%
Surfaces flatness	±0.5% max.	-0.15~+0.18%	-0.09-0.11%
Physical Properties Water absorption	1-3%	1-3%	≤0.5%
Breaking strength	≥1100N	2000N	4031N
Bending resistance	≥23N/mm ² 2	30N/mm ²	40N/mm²2
Resistance to deep abrasion	≤175mm³	Class 4	Class 4
Temperature shock resistance	No visible crack	No visible crack	Durable
* Resistance to frost	No visible crack	No visible crack	No visible crack
Non-slip	R9-R13	R9-R13	R11
Colour resistance to light	no colour changes	no colour changes	no colour changes
Chemical Properties Chemical resistance	no visible changes when subjected to chemicals	Durable	Durable
Resistance to staining	≥3	Class 5	Class 5

PACKING DETAILS

SIZES	SURFACE	PCS/CTN	M²/CTN	KG/CTN
	M			
600x600mm	√	4	1.44	31.5