
First beat: instrument identity and complete sequencer

ACTUAL SOURCE3c41 EMULATOR



R5 PROPOSAL / NOT FIRMWARE

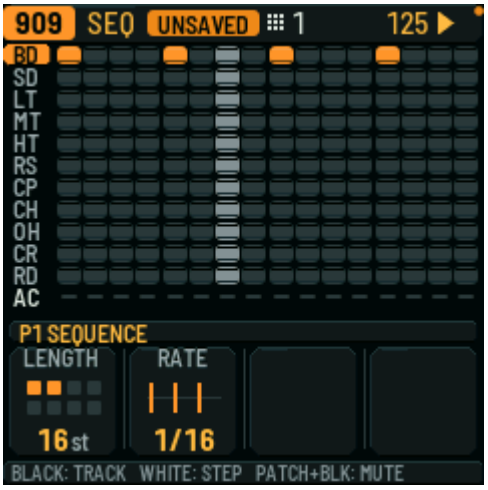

Native240 x240 images embedded without resampling. Actual3c41 captures are separate from accepted d158, whose UI/glyph files are identical. Controlled proposal power state is3bars, not a measured percentage. State/value/phase limits are named below.

Retain 11tracks plus accent,16columns, LENGTH/RATE, black-track selection, white/pad writing, PATCH+black mute and all useful lower controls.

Change / reconsider Instrument pictures replace BD/SD abbreviations; unmapped lower cells show selected instrument. Power moves consistently to the compact top status.

Useful outcome Recognize the intended sound without a new selection page or losing step context.


Physical route Known fresh empty909 SEQ: pads0/4/8/12, then SEQ PLAY. The delivered running comparison has the same four-kick pattern.

Access cost 4 step taps +1 PLAY from initialized selected909; +1 track selection if unknown. Proposed navigation delta0.

Tradeoff / still unproved Running phase and unspecified project cells are not synchronized. Picture recognition and audible outcome are not qualified; this is a visual/model proposal.

Drum editing: retain actual units, cues and knob positions

ACTUAL SOURCE3c41 EMULATOR

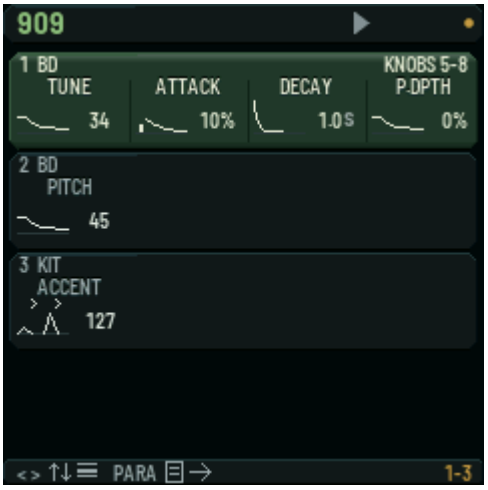

R5 PROPOSAL / NOT FIRMWARE



Native240 x240 images embedded without resampling. Actual3c41 captures are separate from accepted d158, whose UI/glyph files are identical. Controlled proposal power state is3bars, not a measured percentage. State/value/phase limits are named below.

Retain 909 Tune34, Attack10%, Decay1.0s, P.Dpth0%; sparse second row, KIT row, K5-K8 and source drum-parameter glyph families.

Change / reconsider Instrument identity uses a recognizable glyph; top status is common. The R4 typed-domain/edit defect is repaired in the proposal.

Useful outcome Read the actual parameter and edit it directly. Repairing the old prototype is not a new firmware improvement.

Physical route From SEQ: PARA; K5 +4 raw units changes Tune34 to 38. Track SD then K7 +4 changes Decay340 to 361ms.

Access cost PARA+turn from known SEQ/page=2 gestures; selecting a different track adds1. Delta0.

Tradeoff / still unproved Drum SI engineering/readout laws are reused. The canvas does not simulate native live voice-envelope animation or physical knob acceleration.

Chicago: preserve native waveform and established ADSR family

ACTUAL SOURCE3c41 EMULATOR



R5 PROPOSAL / NOT FIRMWARE



Native240 x240 images embedded without resampling. Actual3c41 captures are separate from accepted d158, whose UI/glyph files are identical. Controlled proposal power state is3bars, not a measured percentage. State/value/phase limits are named below.

Retain Simultaneous groups, all sparse columns and SOUND/FX pages; existing full-row K5A/K6D/K7S/K8R labels and source ADSR layout; current engine/slot identity.

Change / reconsider The native one-cycle29 x 19 source oscillator projector replaces the rejected prototype sketch. Top status is common; there is no new bespoke ADSR design.

Useful outcome Consistent scope/value/cue ownership without discarding useful current native vocabulary.


Physical route K2 or PARA selects a remembered row; K5-K8 keep their columns; SCALE opens all parameters; PATCH returns.

Access cost Same source routing and page memory. No extra confirmation or page; delta0.


Tradeoff / still unproved WAVE is bound to visible factory0 with20 explicit edits, not an untouched factory or audio waveform. Chicago ADSR uses the source q fallback in this non-audio model; live compiled-VCA inputs/cursors are not fabricated.

Juno: preserve large values and fast parameter editing

ACTUAL SOURCE3c41 EMULATOR

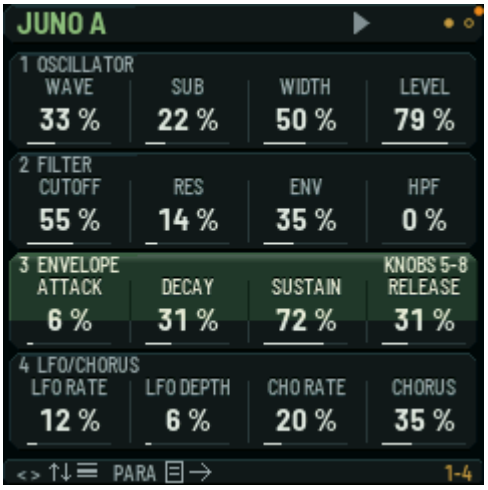

R5 PROPOSAL / NOT FIRMWARE

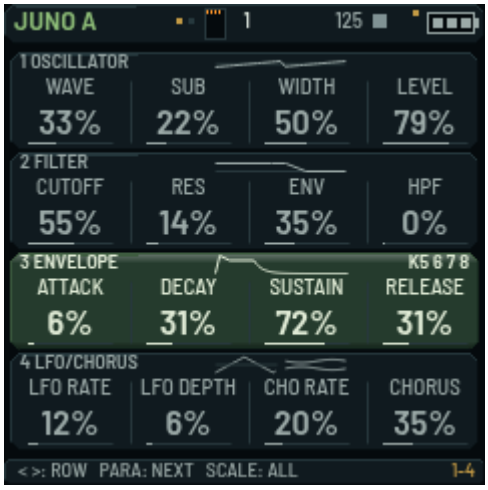

Native240 x240 images embedded without resampling. Actual3c41 captures are separate from accepted d158, whose UI/glyph files are identical. Controlled proposal power state is3bars, not a measured percentage. State/value/phase limits are named below.

Retain Existing large numeric readouts, labels, neutral bars, four columns, four neighboring groups plus SOUND,16 controls and remembered navigation.

Change / reconsider Shared wave/filter/ADSR/LFO/effect-family thumbnails use only the row-heading gutter. The earlier proposal that shrank values or replaced the whole Juno ADSR row is rejected. The compact top status stays consistent.

Useful outcome Additional visual context must not reduce the legibility of the values a musician edits.

Physical route PARA enters remembered PART; K2 or PARA changes rows; K5-K8 edit fixed columns; fifth SOUND page remains.

Access cost All parameter access routes retained. Delta0; no timed/recognition benefit claimed.

Tradeoff / still unproved Actual complete3c41 ENVELOPE is paired with the same proposed selected row and same values. The new small heading cues are extensions whose usefulness/recognition still require assessment. The earlier oscillator capture has an incomplete lower band and is excluded from equivalent-state presentation. No AudioKitJ6, audio or live-cursor fidelity claim.

Performance: retain every useful lower control

ACTUAL SOURCE3c41 EMULATOR



R5 PROPOSAL / NOT FIRMWARE



Native240 x240 images embedded without resampling. Actual3c41 captures are separate from accepted d158, whose UI/glyph files are identical. Controlled proposal power state is3bars, not a measured percentage. State/value/phase limits are named below.

Retain 16pattern tiles, five lanes, current actual engine labels, selected/sounding/queued identities, mute routes, TEMPO/SWING/FILTER/PUMP.

Change / reconsider Common compact status adds honest top power visibility. Pending LCD identity stays steady in STOP/WAIT; physical light policy remains separate. Dynamic engine labels are unchanged baseline.

Useful outcome Keep the audible idea and direct performance controls visible while giving consistent status.

Physical route HOME K5tempo/K6swing/K7filter/K8pump; pads cue patterns; black keys mute.

Access cost 0 navigation +1 turn from HOME for each perform control. Delta0.

Tradeoff / still unproved Per-part cue/mute collision details and physical clarity remain to be qualified. Prototype lane contents/phase are controlled; REC arm is not captured-take success.

Mixing: the visible kit owns controls and pad release

ACTUAL SOURCE3c41 EMULATOR



R5 PROPOSAL / NOT FIRMWARE



Native240 x240 images embedded without resampling. Actual3c41 captures are separate from accepted d158, whose UI/glyph files are identical. Controlled proposal power state is3bars, not a measured percentage. State/value/phase limits are named below.

Retain 11track strips, pan thumbs, four lower LEVEL/PAN/REV/DLY controls, native dB/pan units, kit hue and step layer.

Change / reconsider Instrument pictures and top status unify the display. Typed values share their source parameter owner; existing-hit deletion resolves on short release.

Useful outcome The visible destination and physical controls agree. R4 model repairs are not advertised as firmware feature additions.

Physical route From initial SEQ: NOTE REPEAT twice to909 MIX; black selects track; K5-K8 edit; existing step held800ms then released remains.

Access cost Same source gestures; delta0. MIX holds do not acquire p-lock scope.

Tradeoff / still unproved Static source levels only; live meters/audio and physical LED brightness are not fabricated. Current capture only verifies the selected kick level and visible layout, not every stored raw cell.

BREAK: retain slice, step and live-context surfaces

ACTUAL SOURCE3c41 EMULATOR



R5 PROPOSAL / NOT FIRMWARE



Native240 x240 images embedded without resampling. Actual3c41 captures are separate from accepted d158, whose UI/glyph files are identical. Controlled proposal power state is3bars, not a measured percentage. State/value/phase limits are named below.

Retain Eight visible slice slots, real waveform region,16step strip, A/B identity, count/page controls and every lower LOOP control/help.

Change / reconsider Common top status; current empty/unavailable fixture is truthful and contains no invented waveform.

Useful outcome A useful waveform and release context must remain when valid loop data exists; absence must not masquerade as a playable loop.

Physical route C/D adjust count; C#/D# page; hold step plus1-8 pins a slice;9REV/10JUNGLE/11STUT stay available.

Access cost No added page or confirmation. Source route counts depend on the exact phrase.

Tradeoff / still unproved Captured BUILD_ONLY fixture has no available loop waveform: A NONE, B INVALID in controls. No audible BREAK success, valid-loop playback or release continuity is claimed. A populated equivalent fixture remains required.

Arrangement: neighboring bars, exact lights and both BAR pages

ACTUAL SOURCE3c41 EMULATOR



R5 PROPOSAL / NOT FIRMWARE



Native240 x240 images embedded without resampling. Actual3c41 captures are separate from accepted d158, whose UI/glyph files are identical. Controlled proposal power state is3bars, not a measured percentage. State/value/phase limits are named below.

Retain 11-bar overview, empty entry, per-part BAR controls, repeats, used-pattern dimness and direct all-part assignment.

Change / reconsider Common top status; empty Song no longer inherits the prototype bright HOME pattern. Existing dynamic lane labels remain baseline.

Useful outcome Keep live pattern use distinct from a real selected arrangement bar and durable Song.

Physical route HOME PATCH to SONG; pad assigns all-part pattern and advances; K2 changes BAR control page; PATCH returns.

Access cost Entry1 +bar assignment1 +save request1 before readiness. Delta0.

Tradeoff / still unproved Producer checks cover empty-Song usedP1 dim RGB[31,18,5], not physical brightness or complete durable arrangement. CP2/CP3 take/correction/replay remains open.

The complete musical journey, with current strengths retained

Twenty groups cover J01-J39. This is a whole-instrument overhaul with shared visual/control grammar; the eight paired pages are curated examples, not whole-design acceptance. Exact routes, conditional action counts and source anchors remain in the separate complete map.

W01 First audible beat, then an intentional drum edit

Tap W1/W5/W9/W13 once

W02 Explore the actual sound, then choose another preset deliberately

PARA enters remembered sound page

W03 Record a phrase, stop, correct and perform another take

SEQ REC press arms and resets selected melodic write cursor

W04 Correct one held step, then return to the base sound

From V_SEQ hold original W5/pad4 step05

W05 Record motion, override it for a pass, and remove only the intended lane

REC on:turn the parameter to record its lane

W06 Explore BREAK slices and return to the groove

K5 changes LOOP A; K6 LOOP B; remaining actual page refs retain their scope

W07 Generate a useful variation without misrepresenting destructive replacement

ARP enters generator

W08 Copy the audible multi-part idea to a safe destination

Hold BT

W09 Save the current idea, recognise delay/failure, then retry deliberately

Short unused BT release requests save

W10 Recover a saved idea or reject an unsafe replacement

Clean LOAD:SCALE sends action directly

W11 Turn a live sequence into an explicit durable arrangement

PATCH enters SONG

W12 Capture an arrangement performance, inspect it, correct it and repeat

PATCH to SONG

W13 Perform queued variations and mutes with a known next boundary

HOME pad/white key cues pattern(all parts);K4 in PART/SEQ cues current part

W14 Shape a five-part performance without losing useful lower controls

HOME K5 TEMPO/K6 SWING/K7 FILTER/K8 PUMP

W15 Use SMC follow/lock/peek and held effects without stealing another target

Pause press while following captures targets

W16 Launch Loopy clips and release the original cell after viewport changes

KNOB BANK rising press toggles clip mode

W17 Recognise clock preference, loss, WAIT and rejoin

At selected CLOCK SOURCE row,K3/arrow changes preference

W18 Retire stranded notes and make a fresh musical recovery

Keyboard FX+SEQ chord requests notes-off;release both

W19 Adjust Settings safely and see truthful power status during use

Use accepted R2 category/value/action/back/modal routes unchanged

W20 Make feedback/tutorial meaning survive the complete musical journey

Retain native glyph-first parameter and ensemble information

One physical interface; honest status and remaining work

Keep what works 37 hardware keys: legacy control roles use F3-G5/27 keys; the admitted synth PART/SEQ Free Play path uses all37 with REC off, and clip keyboard also uses all37. Sixteen pads retain GRID/piano context and original-release ownership. No keybed lamps are invented. K1 remains master; K2-K4 keep their source roles; K5-K8 retain aligned page controls.

Lights Normal part hue, used-pattern dimness, actual selected/held/playhead priority, source button on/off, REC arm and host-derived clip colours remain separate meanings. Empty Song usedP1 is dim RGB31,18,5. LCD STOP/WAIT pending identity stays steady; physical WAIT/cue light policies are independent.

Compact top power Every locally owned page and overlay uses the same top-right rectangle. Honest values are EMPTY/1bar/2bars/FULL, USB host power and unknown. There is no charger line or calibrated percentage. Percentage inside the glyph is the requested future data contract, not a conversion from thirds or ADC thresholds.

Existing versus proposed Dynamic engine/slot labels, fast parameter routes and Chicago full-row ADSR already exist. R5 reuses native material, parameter glyph vocabulary and musical pattern thumbnail. Recognizable drum identities and Juno heading applications of the shared family are proposals. Repairs to a broken R4 model are not new firmware improvements.

Real evidence 31 focused producer browser checks, complete changed matrix layout inventory, source-projected128-position Chicago WAVE drawings, and bounded actual3c41 Juno/BREAK captures are separately pinned. One misrouted producer capture attempt is retained and excluded. None is independent R5 or device acceptance.

Unfinished musical outcomes Recording, whole phrase/correction/repeated takes, valid-loop BREAK performance/release, generator recovery, presets, durability, SMC/Loopy feedback and physical recognition remain in the full map. A safe refusal is not musical success. No native resource, DSP fidelity, iOS-device or tactile/glare qualification is claimed.

Reserved interfaces The seven CP1 cases stay with the incumbent. CP1 decision precedes selected CP2 strategy then CP3 lifecycle. Settings R2 remains unchanged and component-owned; it needs the common-header interface, not an unauthorized rewrite. Same-hardware comparator adoption and DF1 remain open. Drone data/ID availability stays with the firmware owner.

Next consumer The existing parent routes this frozen successor to the same independent reviewer for affected checks; no replacement reviewer or runtime writer. PNG/PDF are the owner-facing route. HTML is retained for validation, not the sole iOS delivery.